

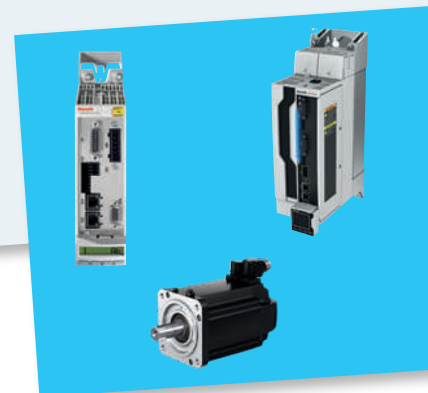
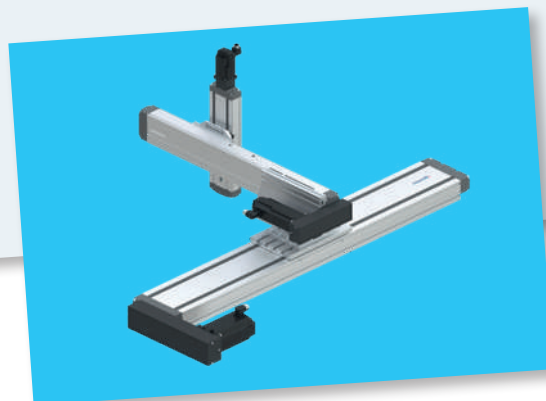
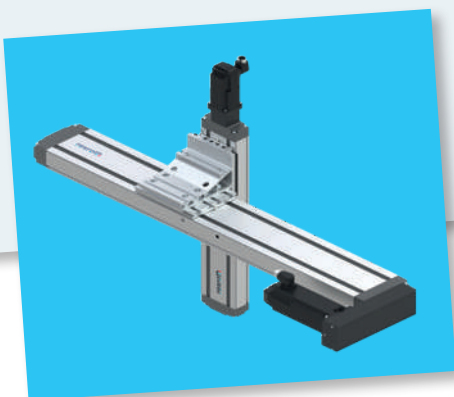


Multi-axis systems

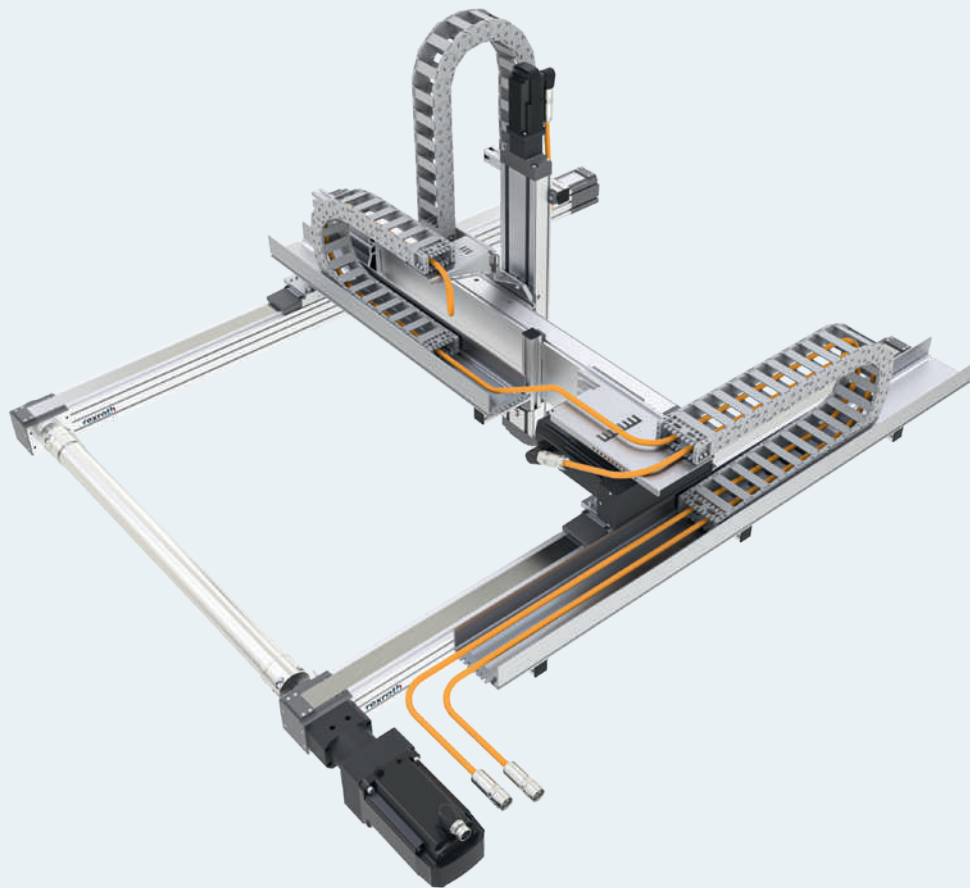

Example		CMS	-	3SB	-	30	-	2
System	=	Multi-axis system						
Combination of axes	=	3SA - 3D cantilever chamber <u>3SB</u> - 3D gantry 3SC - 3D gantry, performance-optimized 2HA - 2D cantilever surface 2HB - 2D area gantry 2VA - 2D linear gantry 2VB - 2D linear gantry, wall mounting 1HB - 1D gantry						
Size	=	20 / 21 / 22 / 23 / <u>30</u> / 31 / 32 / 33 / 40 / 41						
Generation	=	Product generation <u>2</u>						

Combination of axes / overview of types

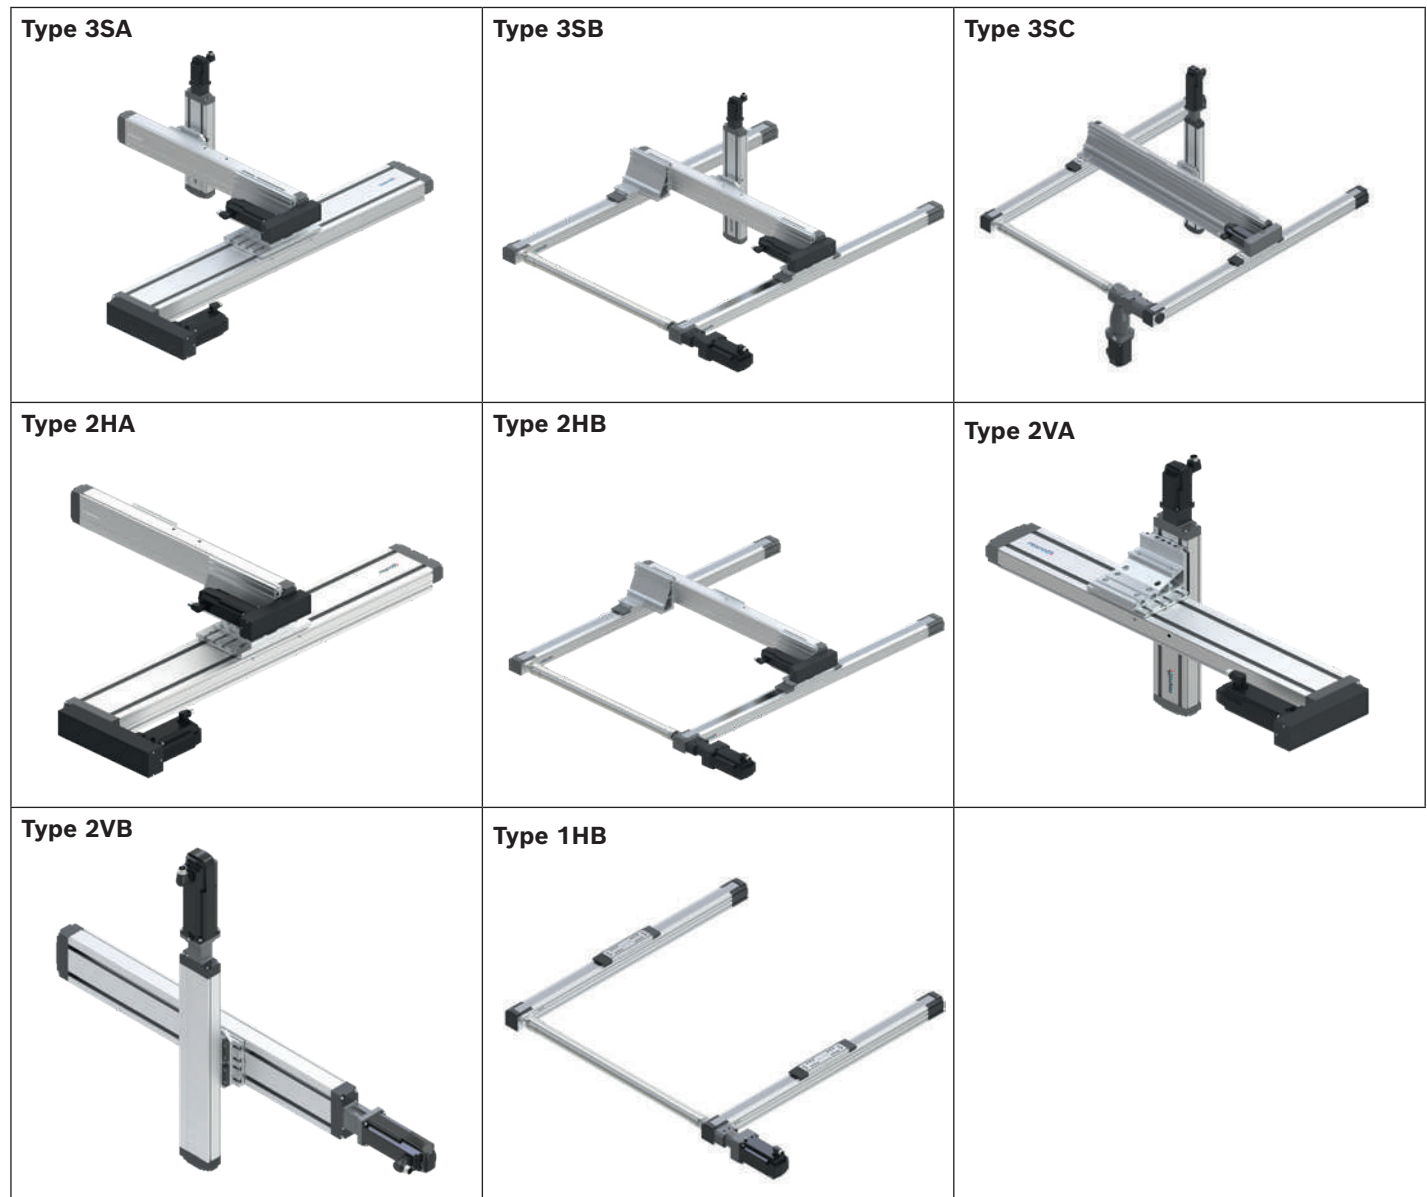

Contents

Identification system for short product names	2
Contents	3
Product overview	4
Example layout	18
Technical notes	21
Technical notes	21
Combination of axes	22
Type 3SA	22
Type 3SB	26
Type 3SC	30
Type 2HA	34
Type 2HB	38
Type 2VA	42
Type 2VB	46
Type 1HB	50
Accessories for multi-axis combinations	54
Overview	54
Fastening with clamping fixtures	56
Z adaptation	57
Connection plates	59
Cable drag chains	66
Your way to the product	68
Your way to the product	68
Further information	70
Operating conditions	70
Links	71
Service	72
Success story	74

Product overview

LINEAR MOTION TECHNOLOGY
ONE GENERATION AHEAD:
COMPLETE SOLUTION - MINIMAL ENGINEERING:

The Factory of the Future will be more profitable, sustainable and future-proof – despite increasingly individual and flexible production processes. The requirements are therefore defined. As a leading supplier of linear motion technology and mechatronic systems, Bosch Rexroth is already providing the answers today: with quick click product selection, simple configuration & ordering processes, and intuitive commissioning of complete solutions without any programming knowledge. This ensures an extremely short time-to-market and high productivity during operation, even for today's highly complex Today.

Factory of
the future

Now. Next. Beyond.

NEARLY UNLIMITED
FIELDS OF APPLICATION
FOR MULTI-AXIS SYSTEMS



Pick & place



Positioning



Palletizing



Feeding



Move



Parts placement

New standard for ready-to-install sub-systems: easier to select and configure, faster to install and get started

MULTI-AXIS SYSTEMS MADE EASY. EVERYTHING FROM A SINGLE SOURCE

Bosch Rexroth now makes the path to a ready-to-install sub-system unbeatably simple. More than 30 years of linear axis expertise have gone into the new multi-axis modular system and the completely revised LinSelect selection tool. There is no easier or faster way to select, configure and commission Cartesian multi-axis systems from standardized best-in-class components. You'll benefit from the latest generation of multi-axis systems from Bosch Rexroth: You'll receive ready-to-install, scalable positioning, handling and dispensing solutions made of proven and perfectly matched components, including all attachments, cable systems, motors and drive controllers – all from a single source, all from one company.

And if your fully assembled, fully integrable sub-system needs to be able to do even more, then take a look at the next step: Smart MechatroniX (see Smart Function Kits chapter) expands the components to include sensors, electronics and software – with completely new solution approaches and business models.

WE MOVE. YOU WIN.



Picking



Stacking




Dispensing



Discharging



Sorting



Checking



Mounting



Bolting

A customized multi-axis system with just a few clicks

You can easily check whether the latest generation of the LinSelect selection tool fulfills what is stated in the specifications – "simpler, faster and better than anything you know": Download LinSelect (see link below) and try the tool for yourself. Or find out about the most important innovations and highlights here in advance.




www.boschrexroth.de/linselect


30 YEARS OF LINEAR AXIS KNOW-HOW INSIDE

Experience the concentrated expert knowledge of a leading supplier in linear motion technology – and as part of the Bosch Group also as a leading user – in every selection step of the new LinSelect. You are graphically guided and asked for a few parameters. This allows you to easily and quickly generate the appropriate reference cycle for your application, then receive detailed information and choices on running performance such as repeatability, for example. You can easily put together your own system from standardized best-in-class components, including electrics, software, drive and motor, with just a few clicks and without any engineering effort.


As a result, you will receive a recommendation in different performance variants and price settings – just as you are used to in a private context from online shops. You can then transfer the system data directly to the configurator and place your order. The CAD models are automatically available at Bosch Rexroth. By the way, commissioning is similarly fast. Could it be any easier?

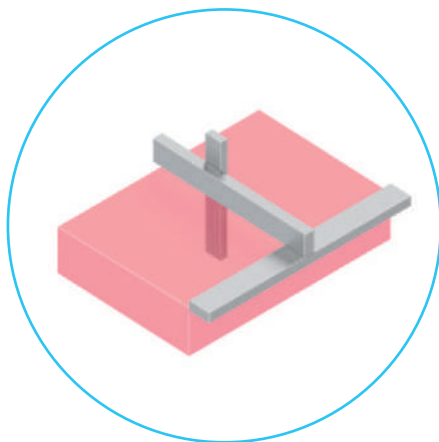

- ▲ Simple selection via graphical interfaces instead of input fields

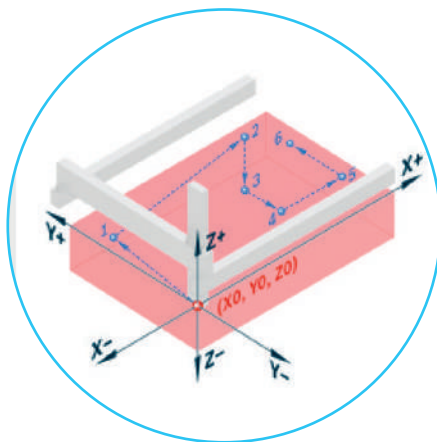

- ▲ Simply select a reference cycle instead of creating complex travel profiles

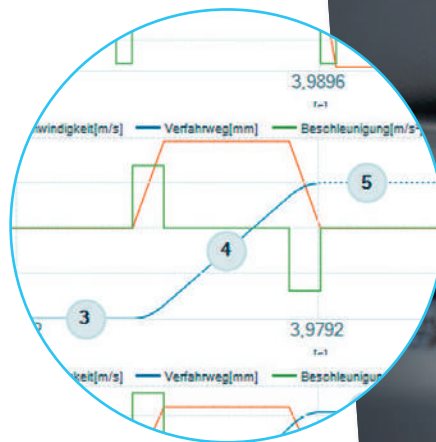

- ▲ Simply use interactive graphics instead of confusing tables



▲ Simply choose from clear recommendations instead of time-consuming comparison and filtering

▲ Easy central access to all project information and links instead of long searches

LINSELECT - SIMPLE SELECTION MINIMAL ENGINEERING



FEW PARAMETERS, ALL POSSIBILITIES – MANY ADVANTAGES

- + Fast:**
 - ▶ Select mechanics/motors/drive controllers in a single tool
 - ▶ Fast engineering, fast result, shorter time-to-market
- + Intuitive:**
 - ▶ Years of application experience implemented in easy-to-use interfaces
 - ▶ Visual support through interactive graphics and animations
- + Intelligent:**
 - ▶ Input of few parameters – output of prepared complex results with all relevant data
 - ▶ Transparent result overview with clear recommendation depending on performance requirements, delivery time or price
- + Interactive:**
 - ▶ Continuous tool chain: Automatically transfer result to the online configurator, finish configuration, order and generate CAD data
 - ▶ Central project and link management as well as documentation, bundled access to all project information – no decentralized storage, no long searches

Prozess definieren

Der Referenzprozess kann sehr leicht angepasst werden. Einfach den gewünschten Parameter überschreiben und aktualisieren. Mit 'Individuell' können einzelne Prozessschritte angepasst, gelöscht oder eingefügt werden.

Z-Vorfahrtweg	300 [mm]
Y-Vorfahrtweg	600 [mm]
X-Vorfahrtweg	1200 [mm]
Gesamtzykluszeit	8 [s]
Nebenzeiten	3 [s]
= ext. Greifer öffnen/ schließen	
Masse	5 [kg]
= ext. Greifer + ext. Anbauteile = ext. Masse	
Massenschwerpunkt	
X-Position	0 [mm]
Y-Position	0 [mm]
Z-Position	-100 [mm]

← Zurück
Individuell
↻ Aktualisieren

Empfehlungen ⓘ

☒ Beste Technik ⓘ


CMS-3SB-21-2

- Technik ⓘ
- Preis ⓘ
- Lieferzeit ⓘ

☐ Bester Preis ⓘ


CMS-3SA-22-2

- Technik ⓘ
- Preis ⓘ
- Lieferzeit ⓘ

☐ Beste Lieferzeit ⓘ


CMS-3SB-22-2


- Technik ⓘ
- Preis ⓘ
- Lieferzeit ⓘ

◀ SIMPLE INPUT

Choose from 2 to 3 reference cycles – the system shows you the corresponding animation. Then simply define your desired system with 6 to 8 parameters for travel range, time and mass – LinSelect does the rest.

▼ DETAILED OUTPUT

LinSelect transforms your inputs into detailed characteristic curves for each axis. You have at least two reference cycles to choose from per portal. And you can conveniently continue to customize and play through them.

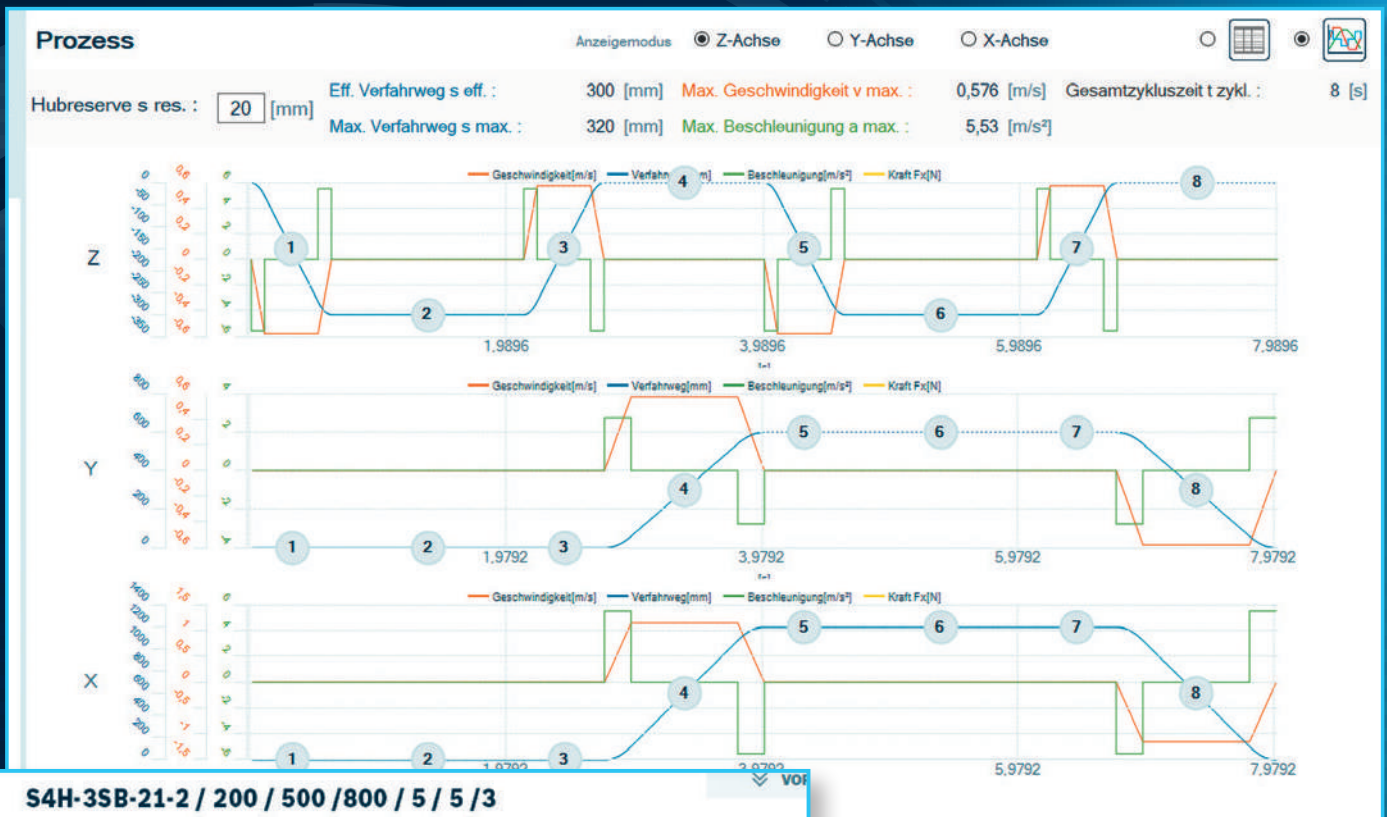

Konfiguration

Max. Verfahrweg Z	200	[mm] (Sub-Produkt CKK-090-NN-1)
Max. Verfahrweg Y	500	[mm] (Sub-Produkt CKR-110-NN-1)
Max. Verfahrweg X	800	[mm] (2 x Sub-Produkt MKR-065-NN-3)
Mechanischer Antrieb Z	5	Kugelumtrieb / BASA 12x5
Mechanischer Antrieb Y	5	Riementrieb / Getriebe PG005S-MF i=5
Mechanischer Antrieb X	3	Riementrieb / Getriebe PG060 i=3
Motor Z	MS2N03-B0BYN	MS2N03-B0BYN
Haltebremse Z	Y	mit Haltebremse 1-Kabel-Anschlussstechnik Konvektionskühlung
Motor Y	MS2N04-B0BTN	MS2N04-B0BTN
Haltebremse Y	Y	mit Haltebremse 1-Kabel-Anschlussstechnik Konvektionskühlung
Motor X	MS2N04-C0BTN	MS2N04-C0BTN
Haltebremse X	Y	mit Haltebremse 1-Kabel-Anschlussstechnik Konvektionskühlung
Automations- & Antriebspaket		CtrlX, PR21, WEB HMI
Funktionspaket		Handling

◀ QUICK RESULT

You'll receive an overview of the possible variants along with a recommendation depending on performance requirements, price or delivery time.



You prefer to work differently? We will also show you other ways to select and configure – as individually as you like.
 ▶ "Your way to the product" chapter

Best-in-class linear axes for motions in space

PROVEN QUALITY – FROM A SINGLE SOURCE, FROM ONE COMPANY

In the field of linear motion technology, Bosch Rexroth is second to none. For 30 years, we have stood for best-in-class components. They are the proven basis for state-of-the-art, robust, high-precision and yet economical multi-axis systems. And the best thing of all: Bosch Rexroth can also supply you with all the additional components and add-on parts required for your individual axis combination. All components are from a single source, optimally tailored to each other and quickly selected and configured. Could it be any easier?

▲ Handling portal instead of a robot.
An economical solution not only in intralogistics

COMPACT MODULES**CKK – compact linear axis with two integrated ball rail systems and ball screw assembly****Features**


- ▶ 5 sizes from CKK-070 to CKK-200
- ▶ Precision aluminum profile with two preloaded ball rail systems
- ▶ Drive via precision ball screw assembly
- ▶ Protection of the installation elements by cover plate and cover strips
- ▶ Max. travel 1,800 mm
- ▶ High travel speeds of up to 1.6 m/s
- ▶ Any lengths available in mm steps

**CKR – compact linear axis with two integrated ball rail systems and toothed belt drive****Features**

- ▶ 4 sizes from CKR-090 to CKR-200
- ▶ Precision aluminum profile with two preloaded ball rail systems
- ▶ Robust toothed belt drive (allows longer lengths than CKK module)
- ▶ Intelligent toothed belt guide protects internal components
- ▶ Max. travel 3,000 mm
- ▶ High travel speeds of up to 5 m/s
- ▶ Any lengths available in mm steps

LINEAR MODULES**MKR – compact linear module with integrated ball rail system and toothed belt drive****Features**

- ▶ 4 sizes from MKR-065 to MKR-140
- ▶ Extremely compact aluminum profile with preloaded ball rail system
- ▶ High-performance toothed belts for high travel speeds of up to 5 m/s
- ▶ Corrosion resistant steel cover strip
- ▶ Max. travel 3,000 mm
- ▶ Any lengths available in mm steps

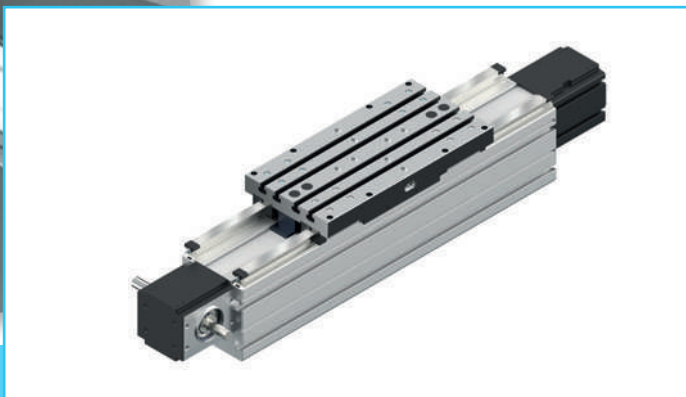**MKR-145 - compact linear module with 2 ball rail systems and toothed belt drive****Features**

- ▶ Compact aluminum profile with high inherent rigidity and 2 preloaded ball rail systems
- ▶ High-performance toothed belts for high travel speeds of up to 5 m/s
- ▶ Max. travel range 2,150 mm
- ▶ Any lengths available in mm steps

Compact meets modularity: Servo drives and motors



ctrlX DRIVE – THE MOST COMPACT DRIVE SYSTEM

In addition to the proven drives such as from the HCS01 series, the world's most compact modular drive system is now available with ctrlX DRIVE. For absolutely future-proof multi-axis solutions. The ctrlX CORE control hardware is optionally integrated in the drive housing – saving you up to 50 percent space in the control cabinet. And even more in combination with the modern MS2N motors, as these offer up to 30 percent higher power density. It couldn't be more compact.

Complete performance package

Particularly in complex multi-axis machine systems, the multi-variant and scalable drive portfolio can demonstrate its strengths. With ctrlX DRIVE, all System components can be freely combined with each other – plus the option of comprehensive extensions of the hardware/software functions.

With a reaction time of around 4 ms, ctrlX SAFETY will offer one of the fastest SafeMotion solutions on the market in the future. Energy management functions ensure energy efficiency, and the patented Smart Energy Mode reduces peak drive loads by up to 70 percent. In addition, ctrlX DRIVE has an extremely robust EMC design.

▲ ctrlX DRIVE: the new modular drive system, optionally with integrated control ctrlX CORE (left)

▼ Control and power in one: The proven IndraDrive Cs (HCS01 in 4 sizes) controls axes perfectly in the power range of multi-axis systems





▲ **MS2N synchronous servo motors** – for more torque and higher rotary speeds. With practical single-cable connection

HIGHLIGHTS ctrlX DRIVE SYSTEM

More productivity

- ▶ Converters and supply units with high peak power ratings
- ▶ Flexible power supplier concept – space saving, flexible, energy-efficient

Fewer components

- ▶ 50% less installation space in the control cabinet
- ▶ Perfect for 300 mm control cabinet
- ▶ Integrated ctrlX CORE – saves 100% control installation space

Less engineering

- ▶ Intelligent functions (multi-Ethernet, multi-encoder, integrated web server etc.)
- ▶ Easy diagnosis
- ▶ Less effort for engineering and wiring
- ▶ Single-cable technology

POWERFUL SERVO MOTORS

Our servo motors are the perfect team players in the ctrlX DRIVE portfolio. Boasting compact dimensions, they combine optimum dynamics with maximum precision of position, rotary speed, and torque values. Ideal for complex multi-axis systems.

Virtual commissioning

Designers have access to the digital twin of the motor, which is stored in a dimensioning tool and in the ctrlX DRIVE controller. Planning and dimensioning of even complex drive systems can therefore be virtualized quickly and reliably. Every motor is transformed into a data source for intelligent machines or i4.0 applications.

HIGHLIGHTS MS2N SERVO MOTORS

More productivity

- ▶ High torque density for greater power
- ▶ 5 sizes from MS2N03 to MS2N07
- ▶ Maximum dynamics of the servo axes due to low motor inertia and high overload capability

Fewer components

- ▶ Robust single-cable connection
- ▶ MS2N with integrated SafeMotion encoder – no further safety components required
- ▶ Motor as torque sensor makes external sensors redundant

Less engineering

- ▶ Plug-and-play encoder data memory for faster commissioning
- ▶ Digital twin of the thermal motor model

Further highlights

- ▶ Plain shaft without shaft seal ring
- ▶ Multi-turn encoder
- ▶ Advanced encoder (B) in conjunction with 1-cable connector (AcuroLink interface)
- ▶ IP64 protection class
- ▶ With or without holding brake
- ▶ Special ground connection terminal near motor flange (used as needed)


Good to know: all details of a well thought out system

Practicality does not only become apparent in the tough day-to-day industrial operation, it can already be recognized beforehand by the many clever details, predefined interfaces and attachments as well as flexible options. Typical Bosch Rexroth

GENERAL NOTES

Installation position

The multi-axis systems are designed for use in a horizontal installation position on a flat surface.



Ambient conditions

Please note for use:

- ▶ Avoid extreme room temperatures
- ▶ Steer clear of contamination
- ▶ Maintain dry environment
- ▶ Stay away from chemical impact
- ▶ Elude shocks/vibrations





Lubrication/maintenance

Multi-axis systems come with initial greasing and are designed for grease lubrication.




Cable management

Multi-axis systems are optionally available with energy chains and cables (plug connection). With plenty of free cross-sections in the energy chains for your own cable routing.

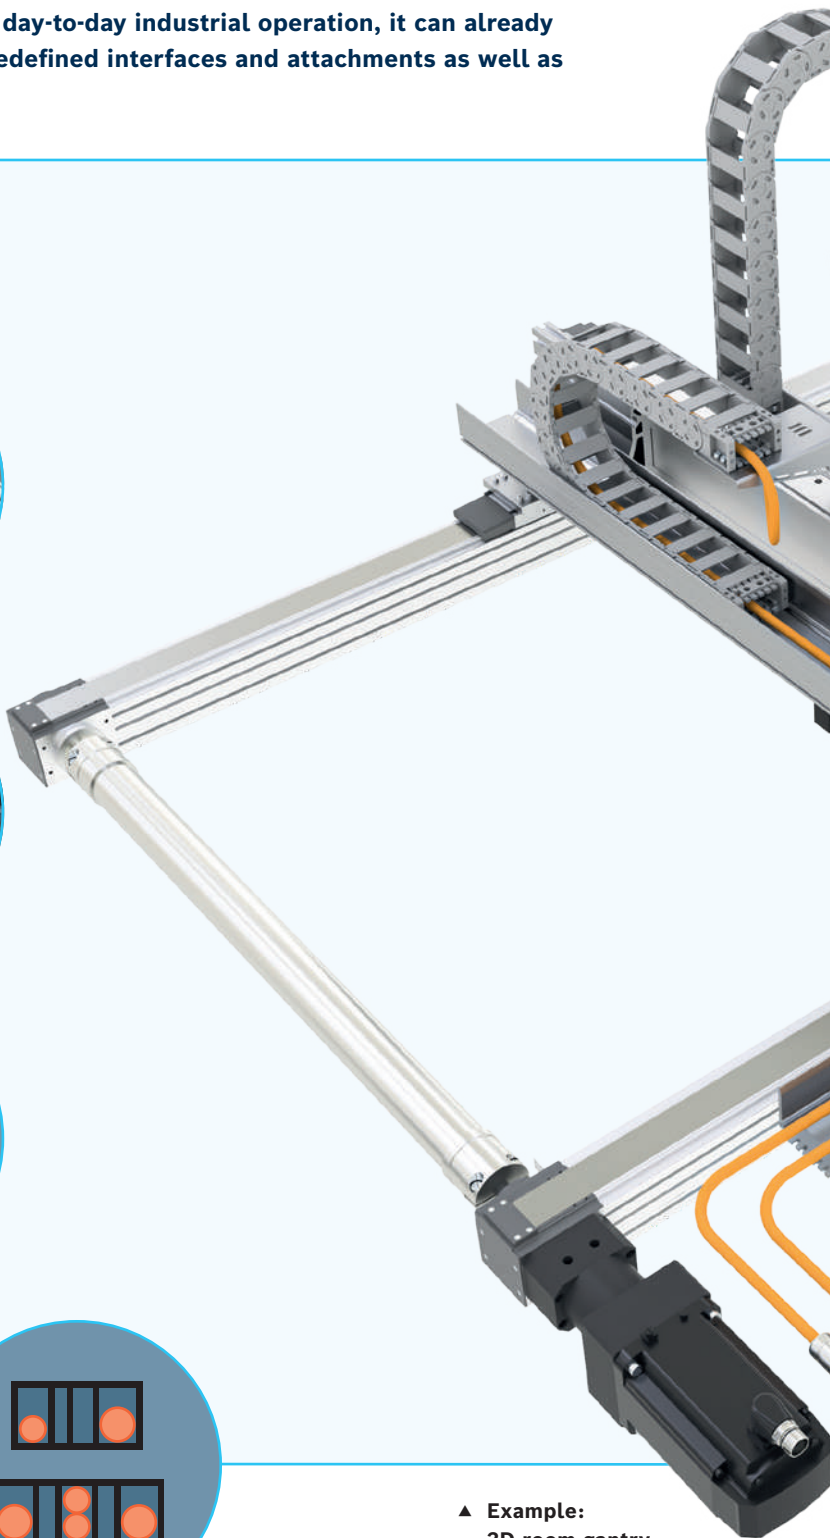

▲ Example:
3D room gantry

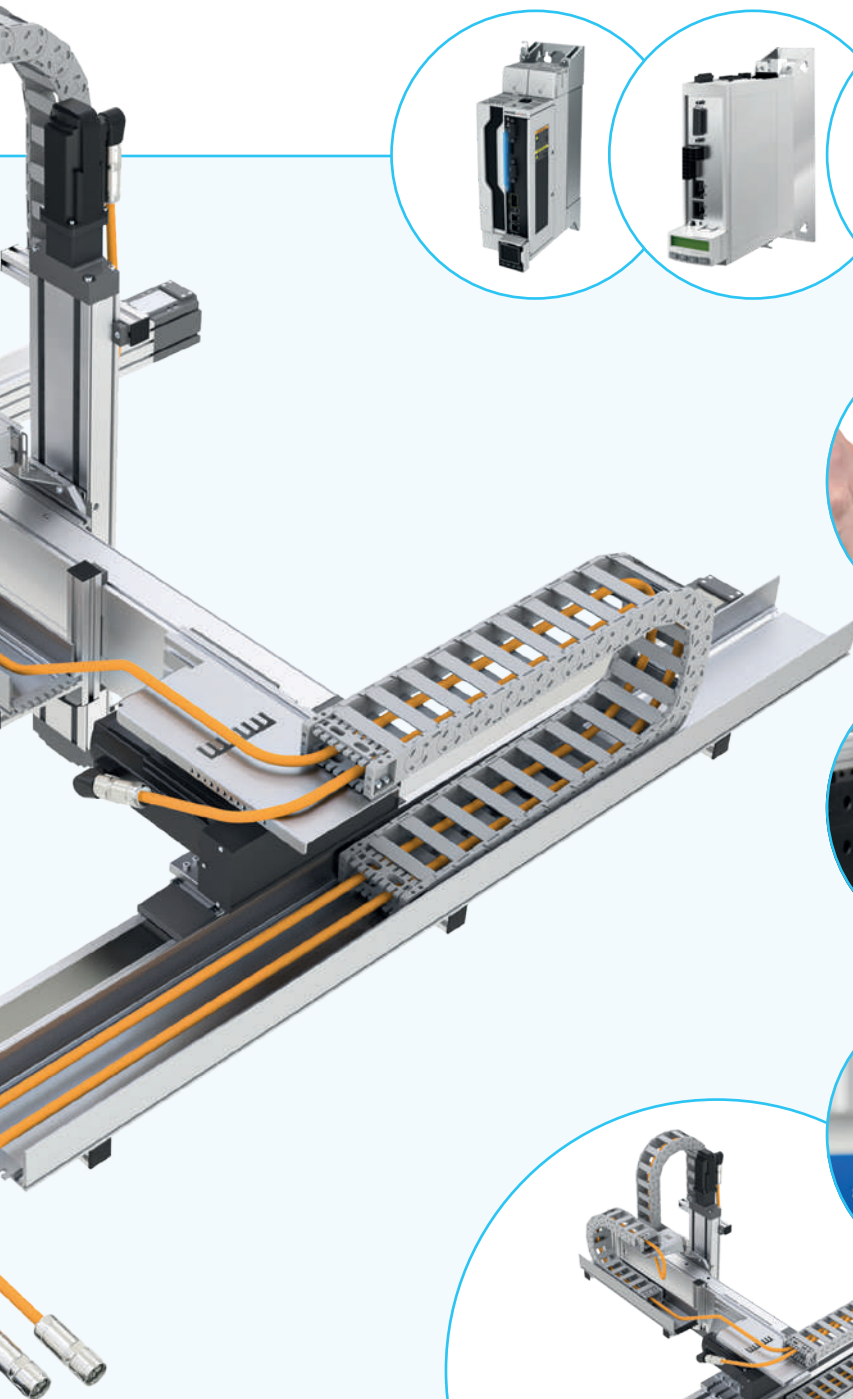

► **Example:**
3D cantilever space




Tailored motor-controller combination

Predefined combinations of motor and controller (electrical drive package) optimally complement the mechanics to form a functional sub-system. The Smart Function Kits with pre-installed operating software offer even more. (Page 54).



Commissioning parameters on encoder memory in motor

Simple commissioning through automated readout of the parameters stored in the motor encoder memory.



Attachments, connection options

Simple mounting of the axis unit on the mounting base via clamping fixtures. Wide range of connection options for customer attachments.




Scope of delivery

(depending on equipment)

Completely assembled: The multi-axis system is delivered fully assembled – including the energy chains and cables if cable management is selected as an option. The axis system is aligned on delivery and only needs to be adjusted to the mounting base during installation.

Partially assembled: For transport or handling reasons, the multi-axis system is delivered partially assembled. The assembly is carried out by the customer according to instructions.

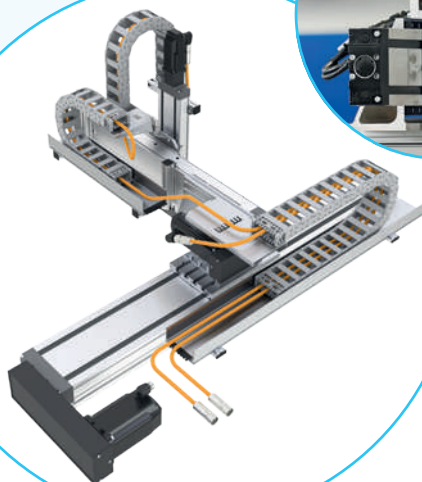


Flexible in every respect: 8 combinations of axes for precise handling

1D gantry




- 4 sizes
- Max. payload* 62 - 366 kg
- Travel range [mm]
- x-axis min. 60, max. 3,000

2D area gantry

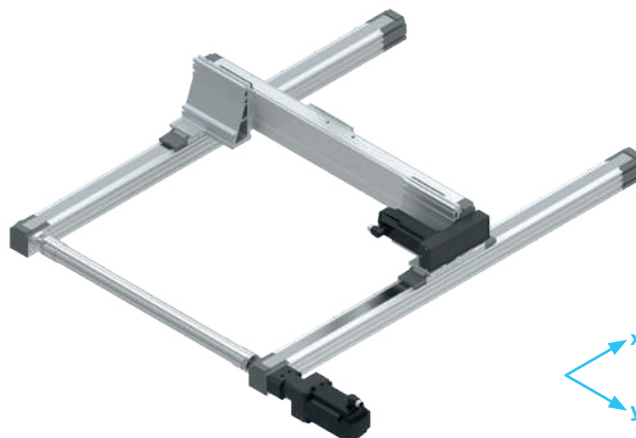


- 8 sizes
- Max. payload* 25 - 205 kg
- Travel range [mm]
- x-axis min. 60, max. 3,000
- y-axis min. 60, max. 2,869

2D linear gantry

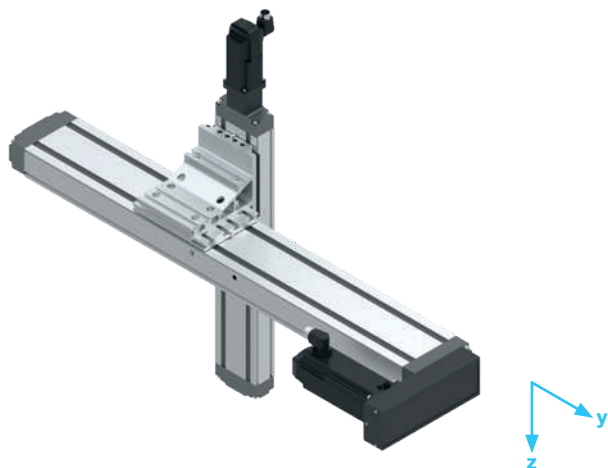

- 8 sizes
- Max. payload* 10-61 kg
- Travel range [mm]
- y-axis min. 50, max. 3,000
- z-axis min. 40, max. 1,590


2D linear gantry, wall mounting

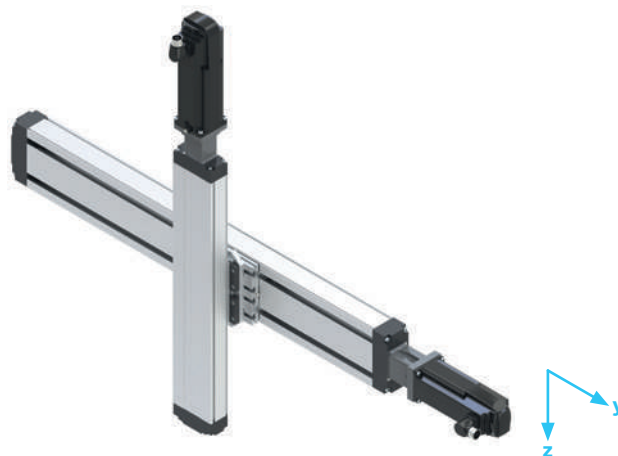


- 12 sizes
- Max. payload* 2 - 61 kg
- Travel range [mm]
- y-axis min. 40, max. 3,000
- z-axis min. 40, max. 1,590

* Depending on size, travel range and dynamics.


8 predefined axis combinations in 68 sizes offer you a lot of freedom for all common handling tasks. The travel ranges can be configured in all axial directions in mm increments. This allows you to make optimum use of installation space, obtain maximum flexibility during installation and adapt your sub-system perfectly to your application.

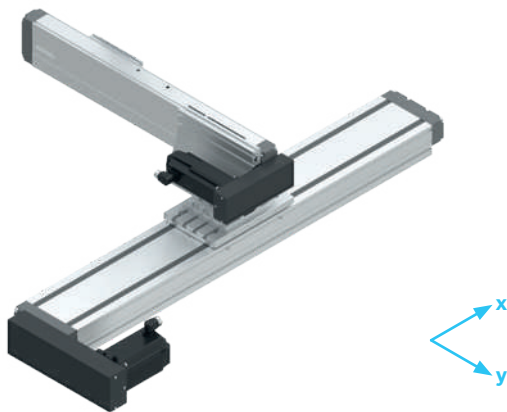2D cantilever surface

- 12 sizes
- Max. payload* 5 - 82 kg
- Travel range [mm]
 - x-axis min. 40, max. 3,000
 - y-axis min. 40, max. 1,200

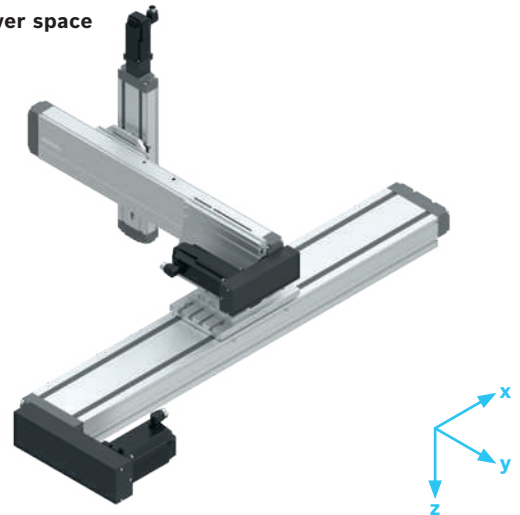3D cantilever space

- 8 sizes
- Max. payload* 2.5 - 32.5 kg
- Travel range [mm]
 - x-axis min. 50, max. 3,000
 - y-axis min. 40, max. 880
 - z-axis min. 40, max. 1,325

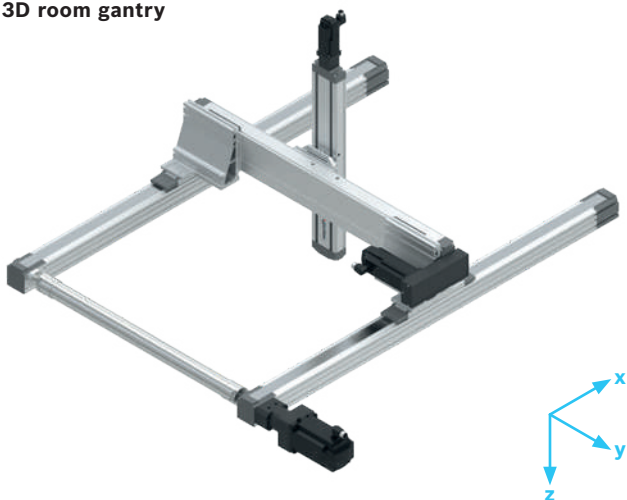
3D room gantry

- 10 sizes
- Max. payload* 10 - 160 kg
- Travel range [mm]
 - x-axis min. 60, max. 3,000
 - y-axis min. 60, max. 2,753
 - z-axis min. 40, max. 1,625


3D space portal, performance-optimized

- 6 sizes
- Max. payload* 34.5 - 65.5 kg
- Travel range [mm]
 - x-axis min. 60, max. 3,000
 - y-axis min. 345, max. 2,350
 - z-axis min. 50, max. 1,590





Example layout

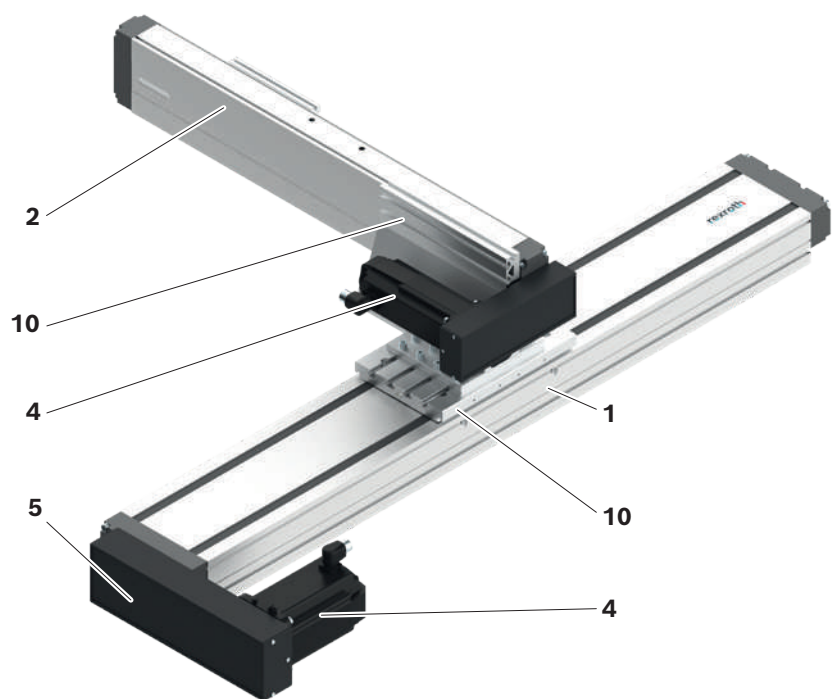

- 1 X-axis/axes
- 2 Y-axis
- 3 Z-axis
- 4 Motor (connection e.g. via belt side drive (5), flange and coupling (6), gearing (7))
- 5 Belt side drive
- 6 Flange and coupling
- 7 Gearing
- 8 Cable drag chain
- 9 Storage tray
- 10 Connection elements (e.g. angle brackets, connection plate, clamping fixtures, etc.)
- 11 Connecting shaft
- 12 Cleated sheet
- 13 ctrlX Drive and drive controller with integrated ctrlX Core drive controller
(with pre-installed software package and SFK4D app)
- 14 I/O modules (optional)

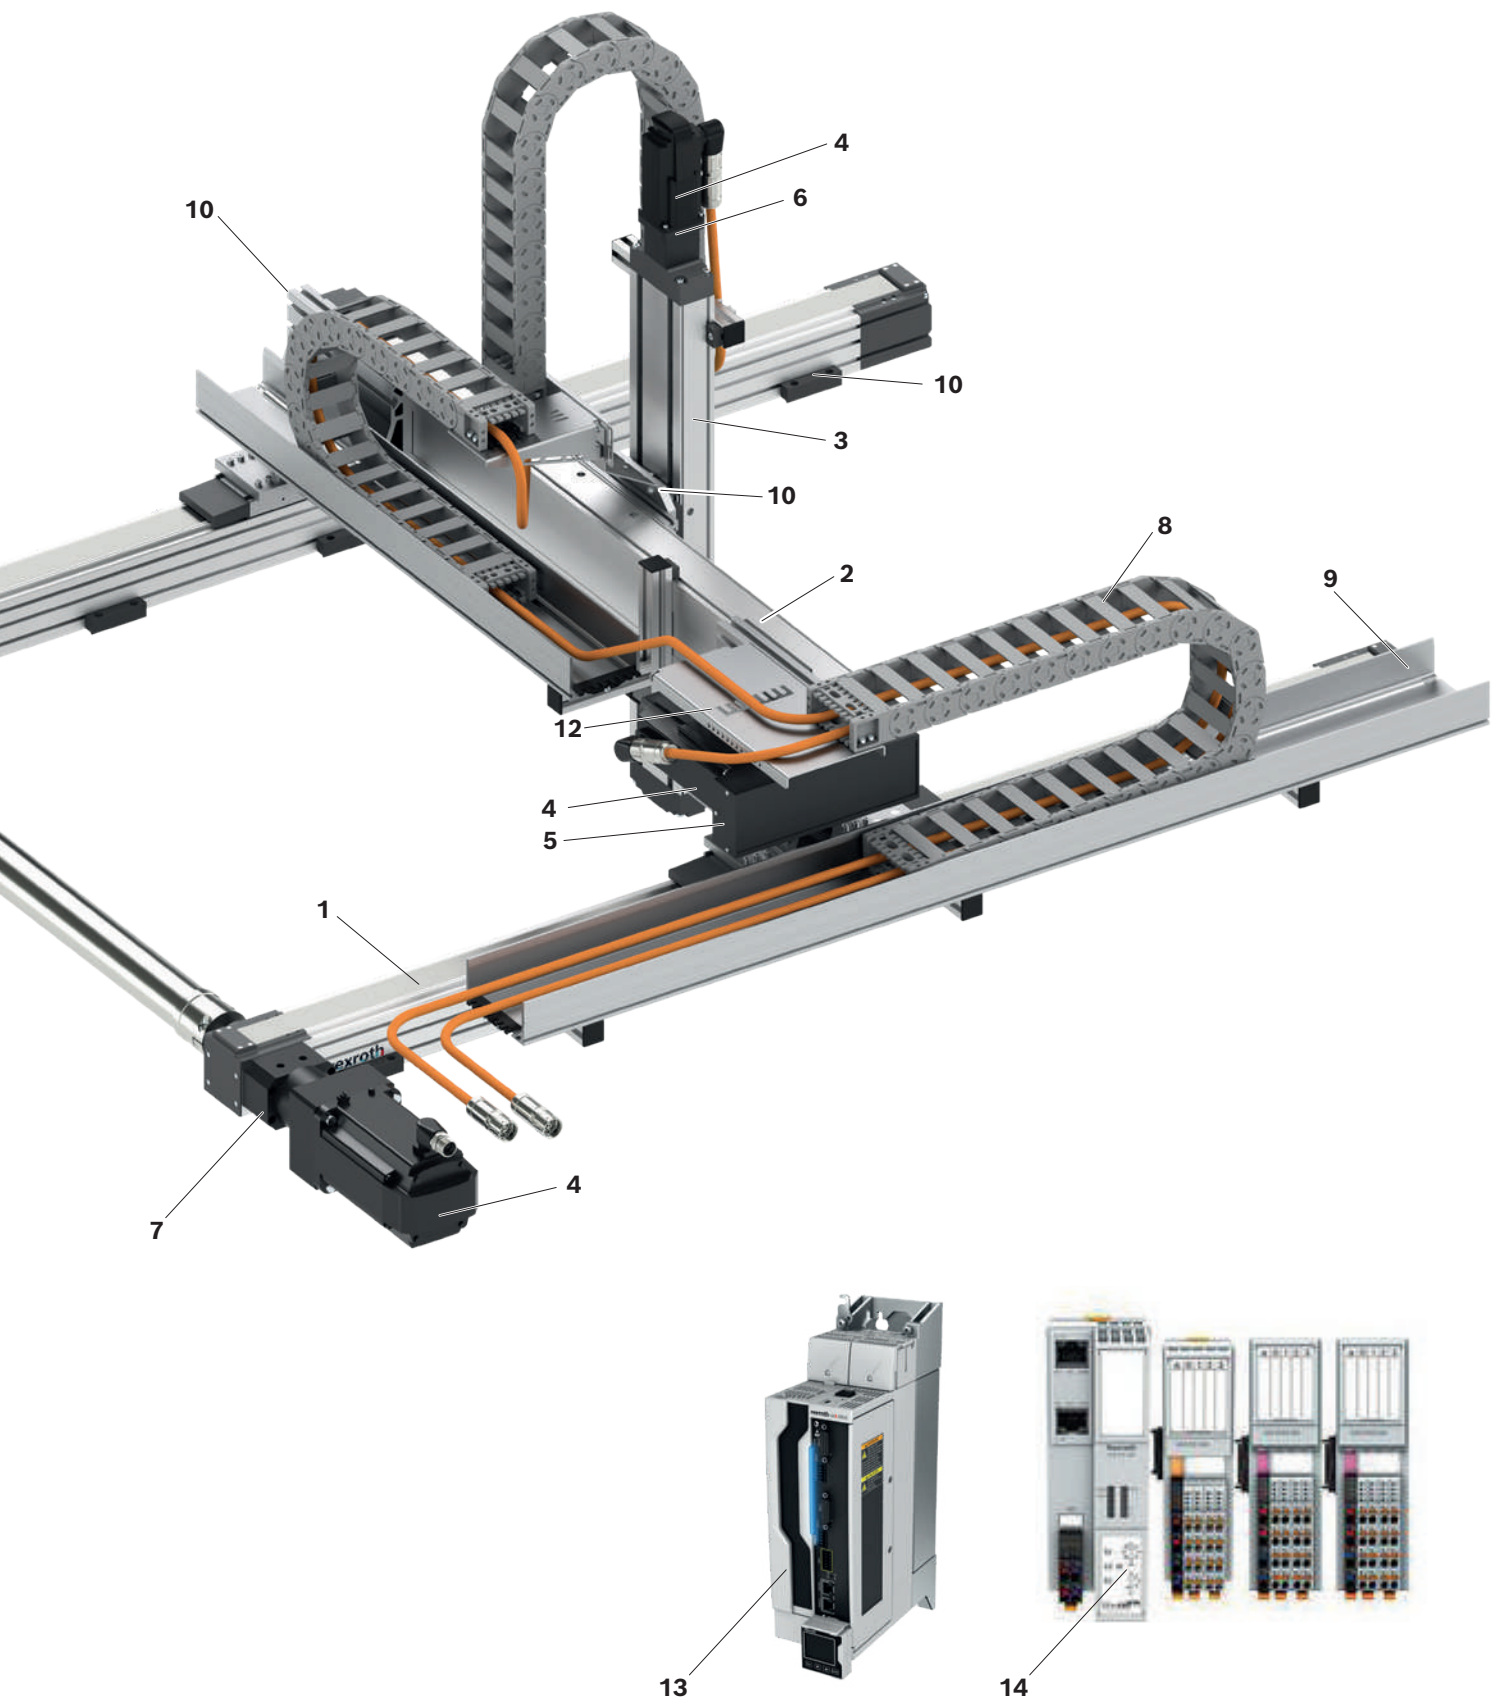


Rexroth linear axes provide for dynamic and precise movement in our multi-axis systems

Linear axes	Compact modules with ball screw assembly CKK	Compact modules with toothed belt drive CKR	Linear modules with toothed belt drive MKR
Sizes	CKK-070-NN-1 CKK-090-NN-1 CKK-110-NN-1 CKK-145-NN-1 CKK-200-NN-1	CKR-090-NN-1 CKR-110-NN-1 CKR-145-NN-1 CKR-200-NN-1	MKR-065-NN-3 MKR-080-NN-3 MKR-110-NN-3 MKR-140-NN-3 MKR-145-NN-3
Motor attachment	Flange/coupling 	Gearing 	Gearing 
	Belt side drive 		

Motor position basic axis

The constructive alignment of the multi-axis systems can be selected as an option.
Example: Combination of axes 3D gantry, type 3SB

Motor basic axis, left (ML)

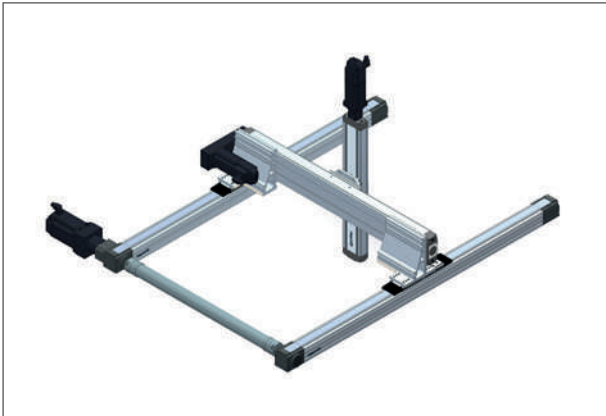

Motor basic axis, right (MR)




Technical notes

Maximum travel range

The travel ranges of the individual axes determine the maximum travel range of the multi-axis system as travel range limits without stroke reserves.

Any excess travel required as a safety distance in the end positions of the individual axes depends on the application and must therefore be taken into account accordingly by the user.

Therefore, the effectively usable working range is usually smaller than the maximum available travel range.

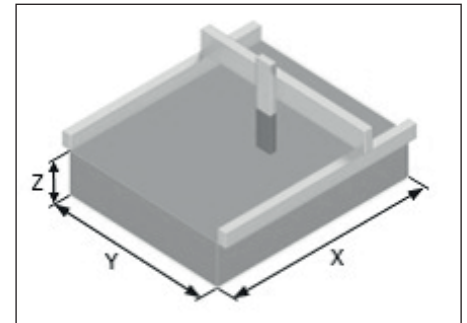

Example:
Travel range 3-axis combination

Technical data (maximum values)

Type	Axis	Linear axis	BASA: d ₀ x P Toothed belt: Gear ratio i	v _{max} (m/s)	M _P max (Nm)	a _{max} (m/s ²)	s _{min} (mm)	s _{min_EC} (mm)	s _{max} (mm)	Motor attachment	Motor	m _{ex} max (kg)
3SB - 20	Z	CKK-090-NN-1	12 x 2	0.23	0.79	15	40	40	600	Flange/coupling	MS2N03-B0	10.0
			12 x 5	0.57	2.39							
			12 x 10	1.13	4.42							
	Y	CKK-110-NN-1	16 x 5	0.38	6.76	15	90	300	1 219	Belt side drive, i = 1	MS2N04	
			16 x 10	0.77	7.66							
			16 x 16	1.23	7.66							
	X	MKR-065-NN-3	i = 3	5.00	4.00	15	60	170	3 000	Gearing	MS2N04	
			i = 5	4.50	2.40							
			i = 10	2.30	1.20							

Example: Combination of axes 3D gantry, type 3SB

Values for maximum travel speed $v_{\max}$, maximum drive torque $M_{P \max}$ and maximum payload $m_{\text{ex max}}$ valid at minimum travel range.


For longer travel, length-dependent reduction for $v_{\max}$ and $M_{P \max}$ for linear axes with ball screw drive or linear axes with connecting shaft as well as a reduction of $m_{\text{ex max}}$ depending on travel range and dynamics.

Abbreviations

Overview of abbreviations

Abbreviation/index	Designation	Unit
$a_{\max}$	Maximum acceleration rate	(m/s ²)
$m_{\text{ex max}}$	Maximum permissible payload of the multi-axis system	(kg)
$s_{\min}$	Minimum travel range	(mm)
$s_{\min_EC}$	Minimum travel range as of which the cable drag chain can be fitted	(mm)
$s_{\max}$	Maximum travel	(mm)
$M_{P \max}$	Maximum drive torque	(Nm)
$v_{\max}$	Maximum travel speed	(m/s)

Type 3SA
Product description

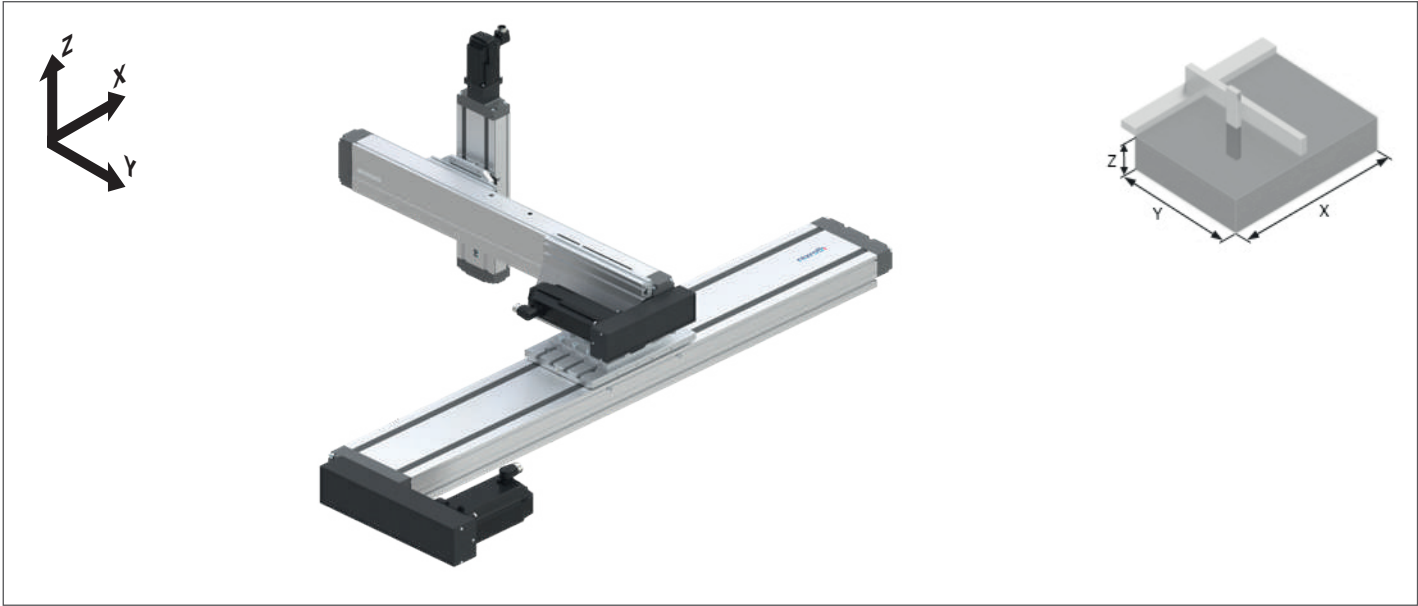


- For applications where a three-dimensional working range must be approached from the outside, the 3D cantilever chamber system is particularly suitable.
- In the basic axis compact modules with ball screw assembly or toothed belt drive.
- 8 sizes


Technical data

Type	Axis	Linear axis	BASA: d _o x P Toothed belt: Gear ratio i	v _{max} (m/s)	M _{p max} (Nm)	a _{max} (m/s ²)	s _{min} (mm)	s _{min_EC} (mm)	s _{max} (mm)	Motor attachment	Motor	m _{ex max} (kg)
3SA - 10	Z	CKK-070-NN-1	8 x 2.5	0.25	0.70	15	40	40	545	Flange/ coupling	MS2N03	2.5
			8 x 5	0.50	1.40							
	Y	CKK-090-NN-1	12 x 2	0.23	0.79	15	70	305	520	Belt side drive, i = 1	MS2N03	
			12 x 5	0.57	2.39							
			12 x 10	1.13	4.42							
	X	CKK-110-NN-1	16 x 5	0.38	6.76	15	50	550	1 325	Belt side drive, i = 1	MS2N04	
			16 x 10	0.77	7.66							
			16 x 16	1.23	7.66							
3SA - 11	Z	CKK-070-NN-1	8 x 2.5	0.25	0.70	15	40	40	545	Flange/ coupling	MS2N03	2.5
			8 x 5	0.50	1.40							
	Y	CKK-090-NN-1	12 x 2	0.23	0.79	15	70	305	520	Belt side drive, i = 1	MS2N03	
			12 x 5	0.57	2.39							
			12 x 10	1.13	4.42							
	X	CKR-110-NN-1	-	-	-	15	50	160	3 000	Gearing	MS2N04	
			i = 5	4.40	2.72							
			i = 10	2.20	1.26							

Type	Axis	Linear axis	BASA: d _o x P Toothed belt: Gear ratio i	v _{max} (m/s)	M _P max (Nm)	a _{max} (m/s ²)	s _{min} (mm)	s _{min_EC} (mm)	s _{max} (mm)	Motor attachment	Motor	m _{ex} max (kg)
3SA - 20	Z	CKK-090-NN-1	12 x 2	0.23	0.79	15	40	40	600	Flange/ coupling	MS2N03	10.0
			12 x 5	0.57	2.39							
			12 x 10	1.13	4.42							
	Y	CKK-110-NN-1	16 x 5	0.38	6.76	15	50	350	800	Belt side drive, i = 1	MS2N04	
			16 x 10	0.77	7.66							
			16 x 16	1.23	7.66							
	X	CKK-145-NN-1	20 x 5	0.30	8.22	15	60	565	1 590	Belt side drive, i = 1	MS2N04	
			25 x 10	0.63	8.22							
			20 x 20	1.27	8.22							
3SA - 21	Z	CKK-090-NN-1	12 x 2	0.23	0.79	15	40	40	600	Flange/ coupling	MS2N03	10.0
			12 x 5	0.57	2.39							
			12 x 10	1.13	4.42							
	Y	CKK-110-NN-1	16 x 5	0.38	6.76	15	50	350	800	Belt side drive, i = 1	MS2N04	
			16 x 10	0.77	7.66							
			16 x 16	1.23	7.66							
	X	CKR-145-NN-1	i = 3	5.00	11.00	15	60	210	3 000	Gearing	MS2N05	
			i = 5	5.00	6.70							
			i = 10	5.00	3.35							
3SA - 22	Z	CKK-110-NN-1	16 x 5	0.38	6.76	15	50	50	1 325	Flange/ coupling	MS2N04	30.0
			16 x 10	0.77	13.51							
			16 x 16	1.23	16.50							
	Y	CKK-110-NN-1	16 x 5	0.38	6.76	15	50	350	650	Belt side drive, i = 1	MS2N04	
			16 x 10	0.77	7.66							
			16 x 16	1.23	7.66							
	X	CKK-145-NN-1	20 x 5	0.30	8.22	15	60	565	1 590	Belt side drive, i = 1	MS2N04	
			25 x 10	0.63	8.22							
			20 x 20	1.27	8.22							
3SA - 23	Z	CKK-110-NN-1	16 x 5	0.38	6.76	15	50	50	1 325	Flange/ coupling	MS2N04	30.0
			16 x 10	0.77	13.51							
			16 x 16	1.23	16.50							
	Y	CKK-110-NN-1	16 x 5	0.38	6.76	15	50	350	650	Belt side drive, i = 1	MS2N04	
			16 x 10	0.77	7.66							
			16 x 16	1.23	7.66							
	X	CKR-145-NN-1	i = 3	5.00	11.00	15	60	210	3 000	Gearing	MS2N05	
			i = 5	5.00	6.70							
			i = 10	5.00	3.35							
3SA - 30	Z	CKK-110-NN-1	16 x 5	0.38	6.76	15	50	50	1 325	Flange/ coupling	MS2N04	32.5
			16 x 10	0.77	13.51							
			16 x 16	1.23	16.50							
	Y	CKK-145-NN-1	20 x 5	0.30	8.22	15	60	400	880	Belt side drive, i = 1	MS2N04	
			25 x 10	0.63	8.22							
			20 x 20	1.27	8.22							
	X	CKK-200-NN-1	32 x 5	0.30	19.01	15	80	405	1 825	Belt side drive, i = 1	MS2N06	
			32 x 10	0.50	19.21							
			32 x 20	1.00	19.21							
3SA - 31	Z	CKK-110-NN-1	16 x 5	0.38	6.76	15	50	50	1 325	Flange/ coupling	MS2N04	32.5
			16 x 10	0.77	13.51							
			16 x 16	1.23	16.50							
	Y	CKK-145-NN-1	20 x 5	0.30	8.22	15	60	400	880	Belt side drive, i = 1	MS2N04	
			25 x 10	0.63	8.22							
			20 x 20	1.27	8.22							
	X	CKR-200-NN-1	i = 3	5.00	38.73	15	80	150	3 000	Gearing	MS2N07	
i = 5			5.00	23.24								
i = 10			5.00	11.62								

Dimension drawings

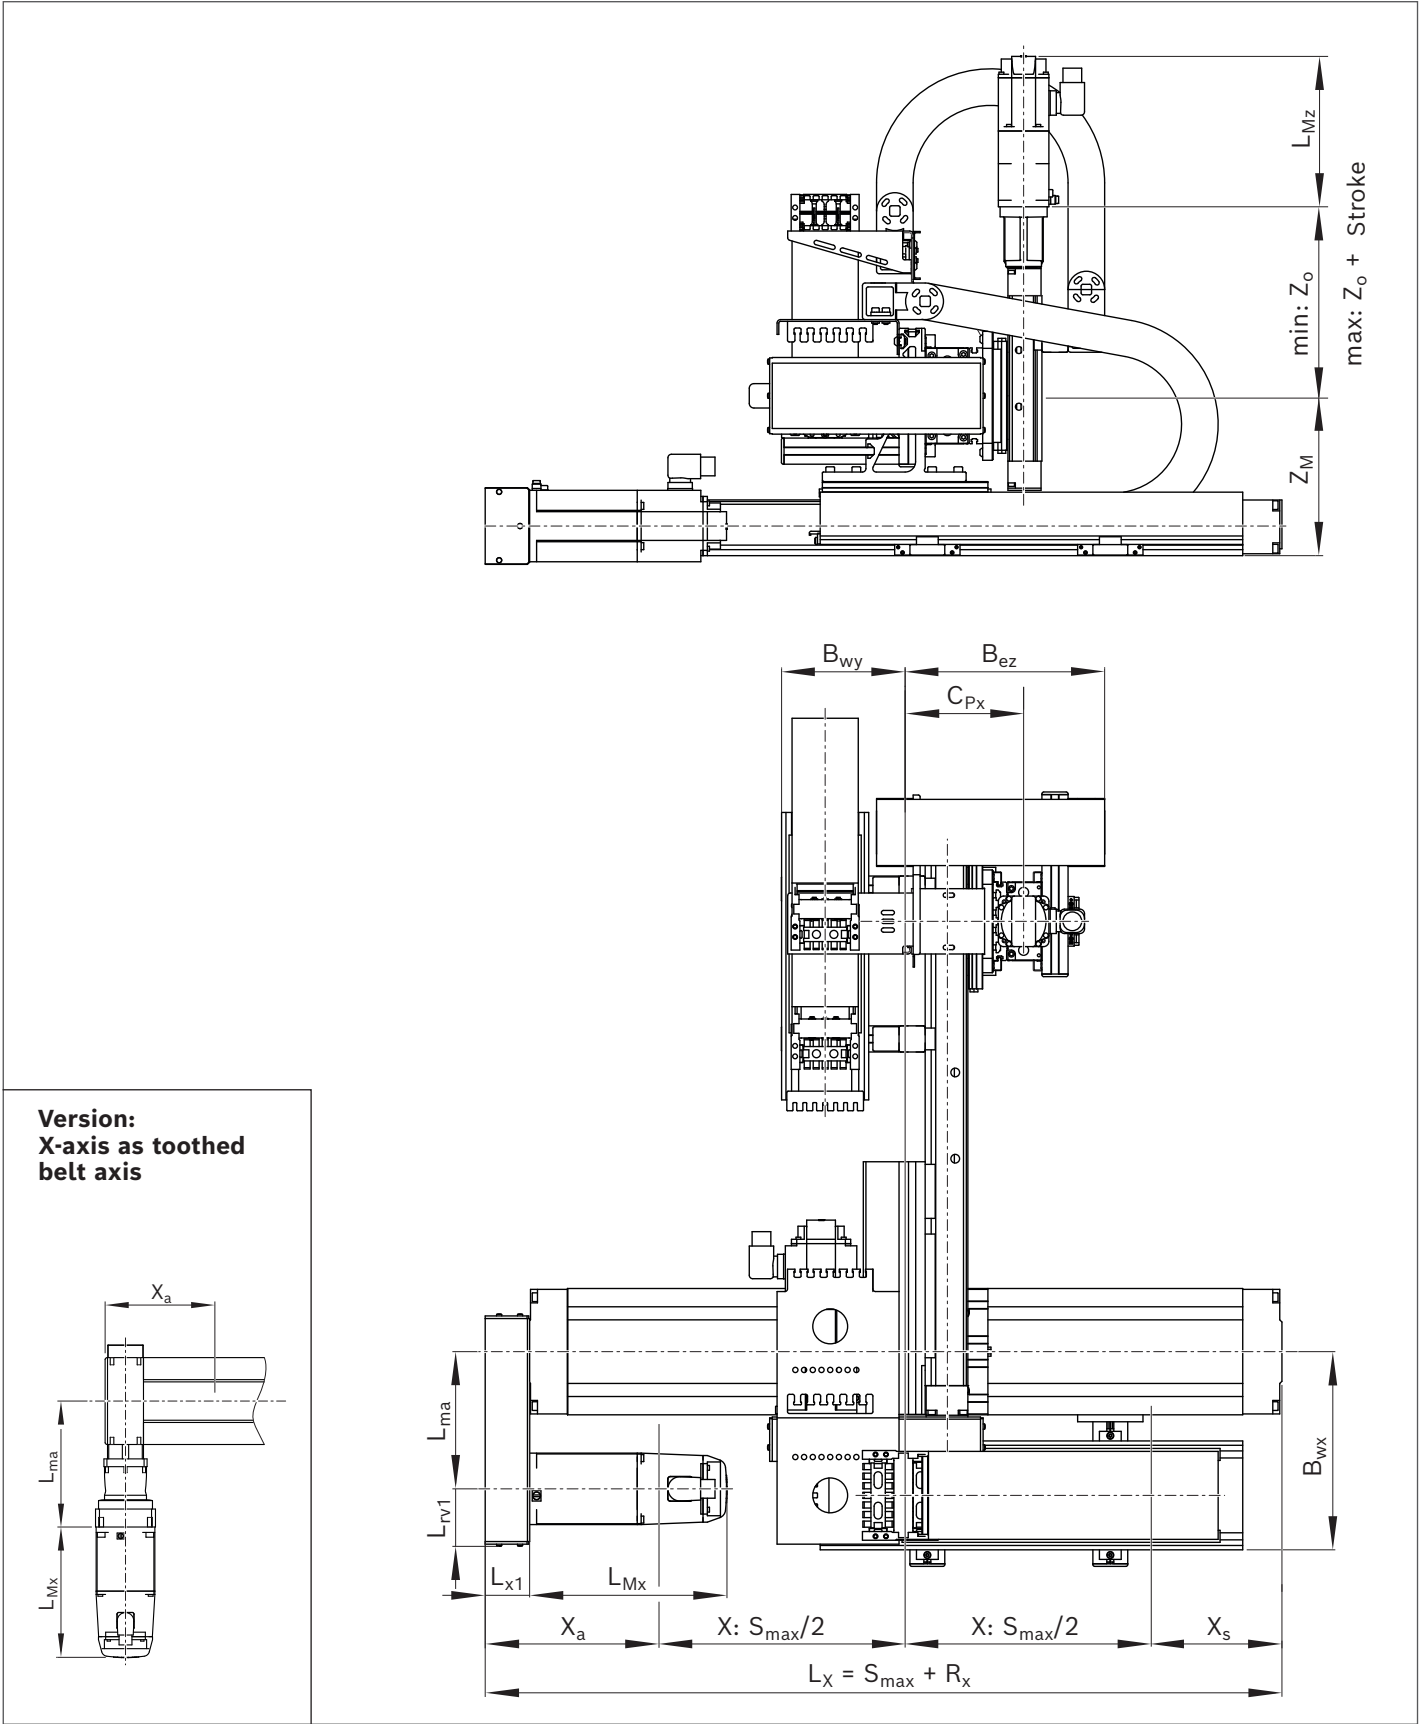


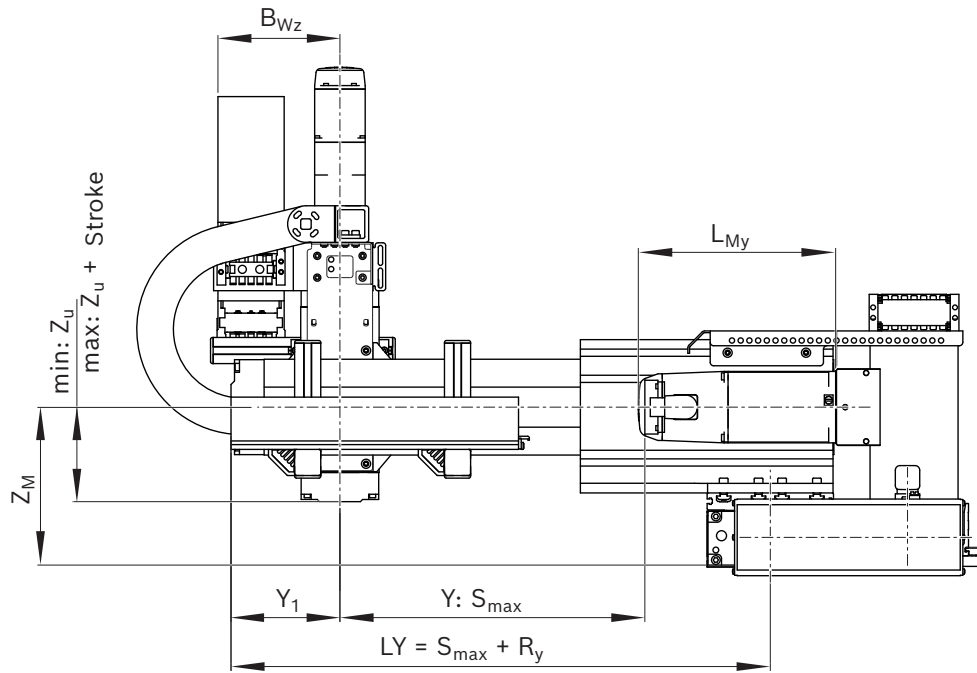

Type	Dimensions (mm)																		
	R_x	R_y	X_a	X_s	B_{wx}	B_{wy}	B_{wz}	B_{ez}	C_{px}	L_{rv1}	L_{ma}	L_{x1}	Z_M	Z_u	Z_o	Y_1	L_{Mx} (max)	L_{My} (max)	L_{Mz} (max)
3SA-10	300.0	237.5	174.5	125.5	210	144	140	215	127	59	145	51	143	80.5	123.5	108.5	194	164	192
3SA-11	366.5	237.5	186.0	180.5	210	144	140	215	127	—	105.5	—	143	80.5	123.5	108.5	194	164	192
3SA-20	350.0	269.0	200.0	150	227.5	142	140	229.0	136.0	66	157.5	51	183.5	108.5	177.5	125.0	258.5	226.5	192.0
3SA-21	400.5	269.0	196.5	204	227.5	142	140	229.0	136.0	—	210.0	—	183.5	108.5	177.5	125.0	290.0	226.5	192.0
3SA-22	350.0	269.0	200.0	150	227.5	142	140	244.5	151.5	66	157.5	51	183.5	125.5	201.0	125.0	258.5	226.5	258.5
3SA-23	400.5	269.0	196.5	204	227.5	142	140	244.5	151.5	—	210.0	—	183.5	125.5	201.0	125.0	290.0	226.5	258.5
3SA-30	546.0	345.0	301.0	245	255.0	132	140	271.0	175.5	76	267.5	66	203.0	95.5	231.0	149.5	261.0	258.5	258.5
3SA-31	649.0	345.0	319.0	330	255.0	132	140	271.0	175.5	—	329.0	—	203.0	95.5	231.0	149.5	317.0	258.5	258.5

Type 3SB

Product description

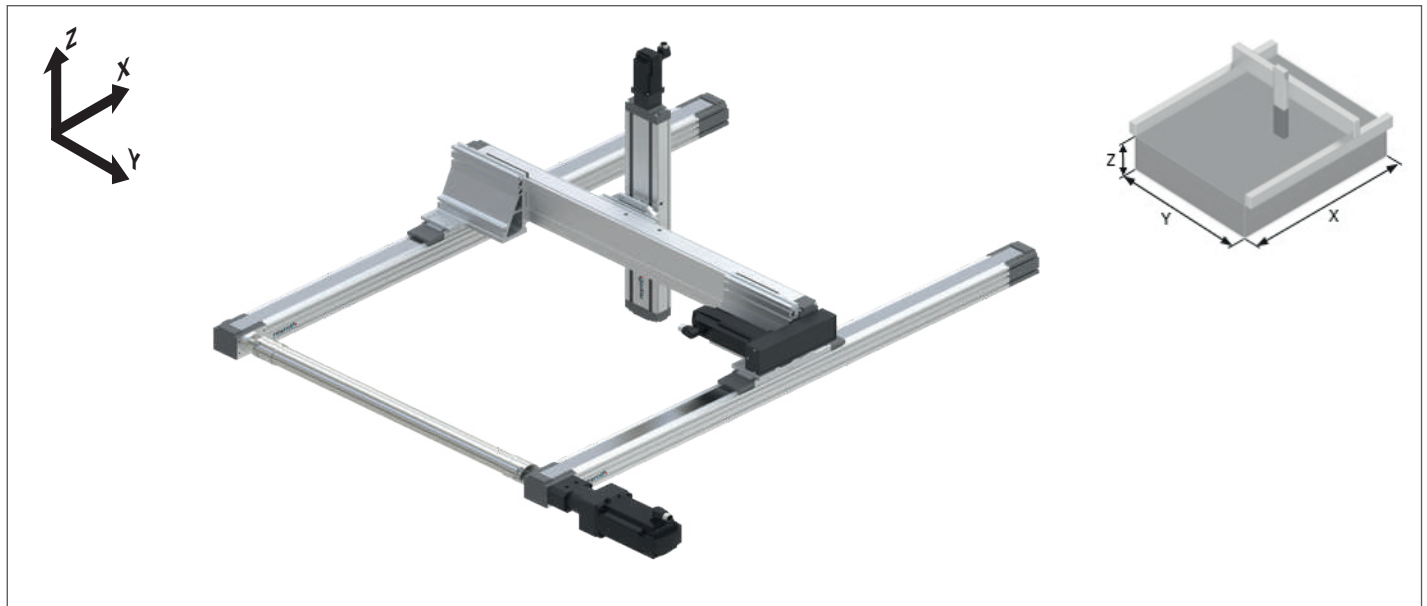


- ▶ 3D gantries are flexible units for positioning in the three-dimensional working range. They comprise mechanically coupled linear modules with toothed belt drive in the x-direction, compact modules with ball screw assembly or toothed belt drive in the y-direction and a compact module axis with ball screw assembly in the z-direction.
- ▶ 10 sizes


Technical data

Type	Axis	Linear axis	BASA: d _o x P Toothed belt: Gear ratio i	v _{max} (m/s)	M _P max (Nm)	a _{max} (m/s ²)	s _{min} (mm)	s _{min_EC} (mm)	s _{max} (mm)	Motor attachment	Motor	m _{ex} max (kg)
3SB - 20	Z	CKK-090-NN-1	12 x 2	0.23	0.79	15	40	40	600	Flange/ coupling	MS2N03-B0	10.0
			12 x 5	0.57	2.39							
			12 x 10	1.13	4.42							
	Y	CKK-110-NN-1	16 x 5	0.38	6.76	15	90	300	1 219	Belt side drive, i = 1	MS2N04	
			16 x 10	0.77	7.66							
			16 x 16	1.23	7.66							
	X	MKR-065-NN-3	i = 3	5.00	4.00	15	60	170	3 000	Gearing	MS2N04	
			i = 5	4.50	2.40							
			i = 10	2.30	1.20							
3SB - 21	Z	CKK-090-NN-1	12 x 2	0.23	0.79	15	40	40	600	Flange/ coupling	MS2N03-B0	10.0
			12 x 5	0.57	2.39							
			12 x 10	1.13	4.42							
	Y	CKR-110-NN-1	-	-	-	15	90	200	1 409	Gearing (NP 005)	MS2N04	
			i = 5	4.40	2.72							
			i = 10	2.20	1.26							
	X	MKR-065-NN-3	i = 3	5.00	4.00	15	60	170	3 000	Gearing	MS2N04	
			i = 5	4.50	2.40							
			i = 10	2.30	1.20							
3SB - 22	Z	CKK-110-NN-1	16 x 5	0.38	6.76	15	50	50	1 325	Flange/ coupling	MS2N04	17.0
			16 x 10	0.77	13.51							
			16 x 16	1.23	16.50							
	Y	CKK-110-NN-1	16 x 5	0.38	6.76	15	90	300	1 123	Belt side drive, i = 1	MS2N04	
			16 x 10	0.77	7.66							
			16 x 16	1.23	7.66							
	X	MKR-065-NN-3	i = 3	5.00	4.00	15	60	170	3 000	Gearing	MS2N04	
			i = 5	4.50	2.40							
			i = 10	2.30	1.20							

Type	Axis	Linear axis	BASA: d _o x P Toothed belt: Gear ratio i	v _{max} (m/s)	M _P max (Nm)	a _{max} (m/s ²)	s _{min} (mm)	s _{min_EC} (mm)	s _{max} (mm)	Motor attachment	Motor	m _{ex} max (kg)
3SB - 23	Z	CKK-110-NN-1	16 x 5	0.38	6.76	15	50	50	1 325	Flange/ coupling	MS2N04	27.5
			16 x 10	0.77	13.51							
			16 x 16	1.23	16.50							
	Y	CKR-110-NN-1	–	–	–	15	90	200	1 138	Gearing (NP 005)	MS2N04	
			i = 5	4.40	2.72							
			i = 10	2.20	1.26							
X	MKR-065-NN-3	i = 3	5.00	4.00	15	60	170	3 000	Gearing	MS2N04		
		i = 5	4.50	2.40								
		i = 10	2.30	1.20								
3SB - 30	Z	CKK-110-NN-1	16 x 5	0.38	6.76	15	50	50	1 325	Flange/ coupling	MS2N04	35.0
			16 x 10	0.77	13.51							
			16 x 16	1.23	16.50							
	Y	CKK-145-NN-1	20 x 5	0.30	8.22	15	100	400	1 523	Belt side drive, i = 1	MS2N04	
			25 x 10	0.63	8.22							
			20 x 20	1.27	8.22							
X	MKR-080-NN-3	i = 3	5.00	12.00	15	60	100	3 000	Gearing	MS2N06		
		i = 5	3.00	7.20								
		i = 10	1.50	3.60								
3SB - 31	Z	CKK-110-NN-1	16 x 5	0.38	6.76	15	50	50	1 325	Flange/ coupling	MS2N04	35.0
			16 x 10	0.77	13.51							
			16 x 16	1.23	16.50							
	Y	CKR-145-NN-1	i = 3	5.00	11.00	15	60	140	2 753	Gearing (NP 015)	MS2N05	
			i = 5	5.00	6.70							
			i = 10	2.92	3.35							
X	MKR-080-NN-3	i = 3	5.00	12.00	15	60	100	3 000	Gearing	MS2N06		
		i = 5	3.00	7.20								
		i = 10	1.50	3.60								
3SB - 40	Z	CKK-145-NN-1	20 x 5	0.30	11.01	15	60	60	1 590	Flange/ coupling	MS2N04	70.0
			25 x 10	0.63	22.02							
			20 x 20	1.27	29.60							
	Y	CKK-200-NN-1	32 x 5	0.30	19.01	15	130	360	1770	Belt side drive, i = 1	MS2N06	
			32 x 10	0.50	19.21							
			32 x 20	1.00	19.21							
X	MKR-110-NN-3	32 x 32	1.60	19.21	15	60	60	3 000	Gearing	MS2N07		
		i = 3	5.00	33.30								
		i = 5	5.00	20.00								
3SB - 41	Z	CKK-145-NN-1	i = 10	2.90	10.00	15	60	60	3 000	Gearing	MS2N07	70.0
			20 x 5	0.30	11.01							
			25 x 10	0.63	22.02							
	Y	CKR-200-NN-1	20 x 20	1.27	29.60	15	80	80	2 265	Gearing (NP 035)	MS2N07	
			i = 3	5.00	38.73							
			i = 5	5.00	23.24							
X	MKR-110-NN-3	i = 10	2.50	11.62	15	60	60	3 000	Gearing	MS2N07		
		i = 3	5.00	33.30								
		i = 5	5.00	20.00								
3SB - 50	Z	CKK-200-NN-1	i = 10	2.90	10.00	15.0	80	80	1 625	Flange/ coupling	MS2N06	150.0
			32 x 5	0.30	19.01							
			32 x 10	0.50	19.21							
	Y	CKK-200-NN-1	32 x 20	1.00	19.21	15.0	80	360	1 680	Belt side drive, i = 1	MS2N06	
			32 x 32	1.60	19.21							
			32 x 5	0.30	19.01							
X	MKR-140-NN-3	32 x 10	0.50	19.21	15.0	80	80	3 000	Gearing	MS2N07		
		32 x 20	1.00	19.21								
		32 x 32	1.60	19.21								
3SB - 61	Z	CKK-200-NN-1	i = 5	5.00	60.00	15.0	80	80	1 625	Flange/ coupling	MS2N06	160.0
			i = 12	3.20	25.00							
			i = 16	2.40	18.75							
	Y	MKR-145-NN-2	32 x 5	0.30	19.01	15.0	80	80	2 400	Gearing	MS2N07	
			32 x 10	0.50	19.21							
			32 x 20	1.00	19.21							
X	MKR-140-NN-3	32 x 32	1.60	19.21	15.0	80	80	3 000	Gearbox	MS2N07		
		i = 3	5.00	33.30								
		i = 5	5.00	20.00								

Dimension drawings

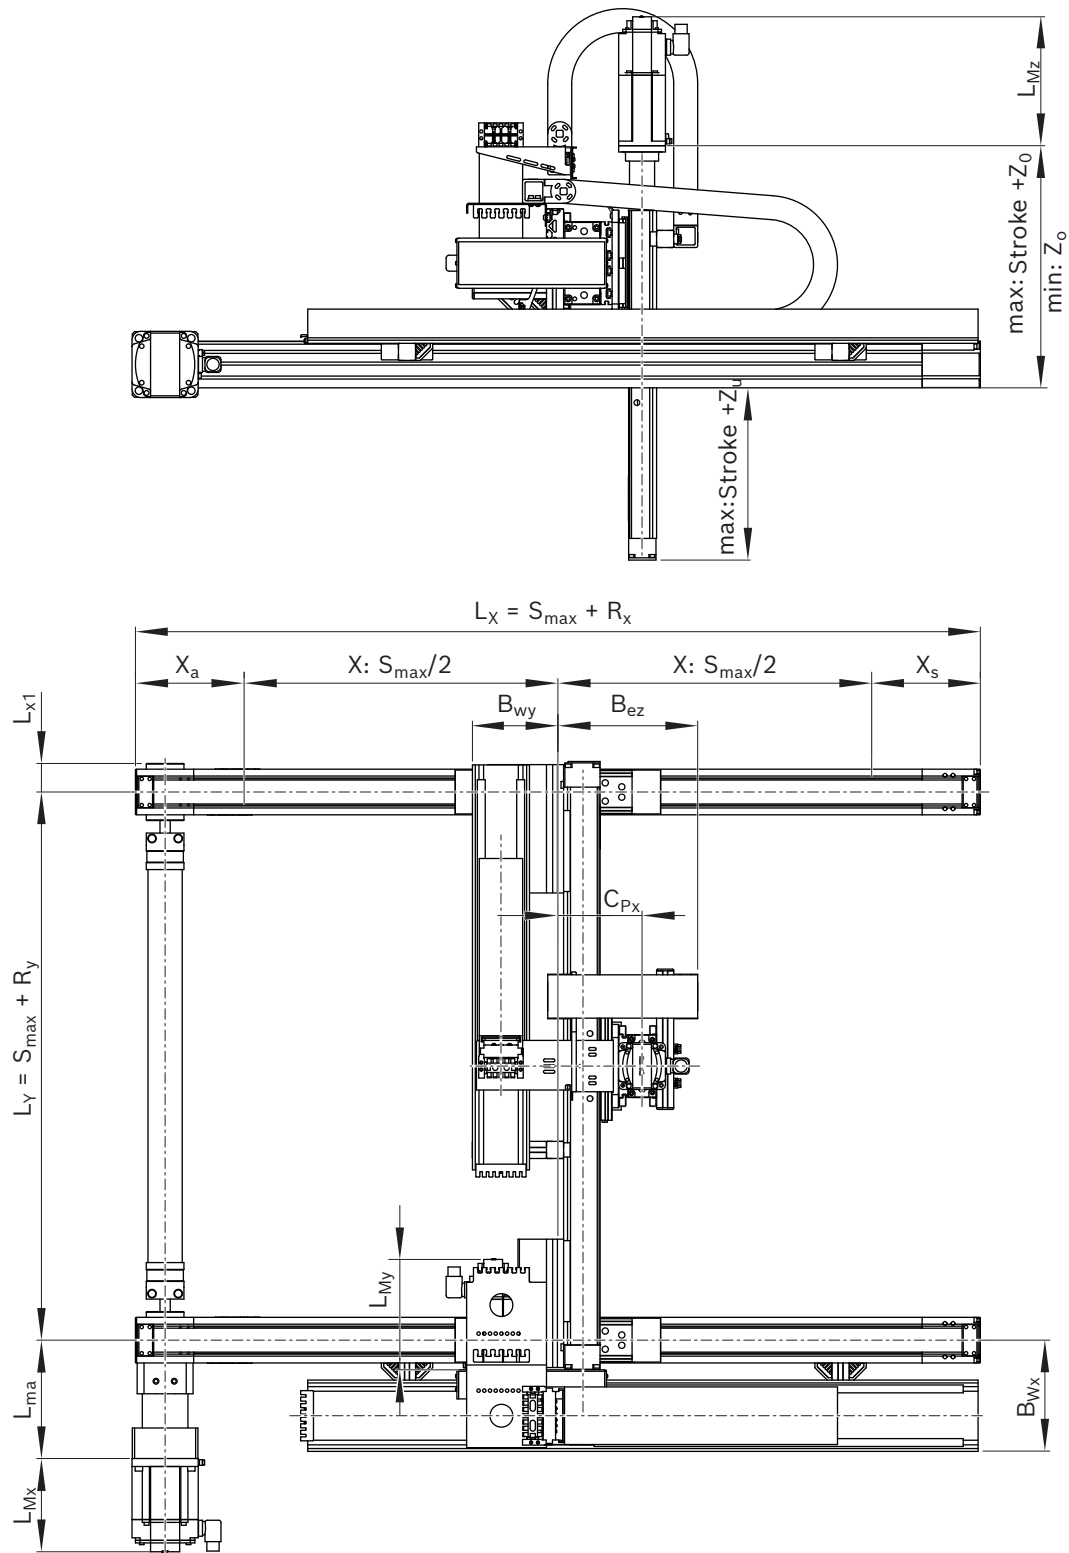

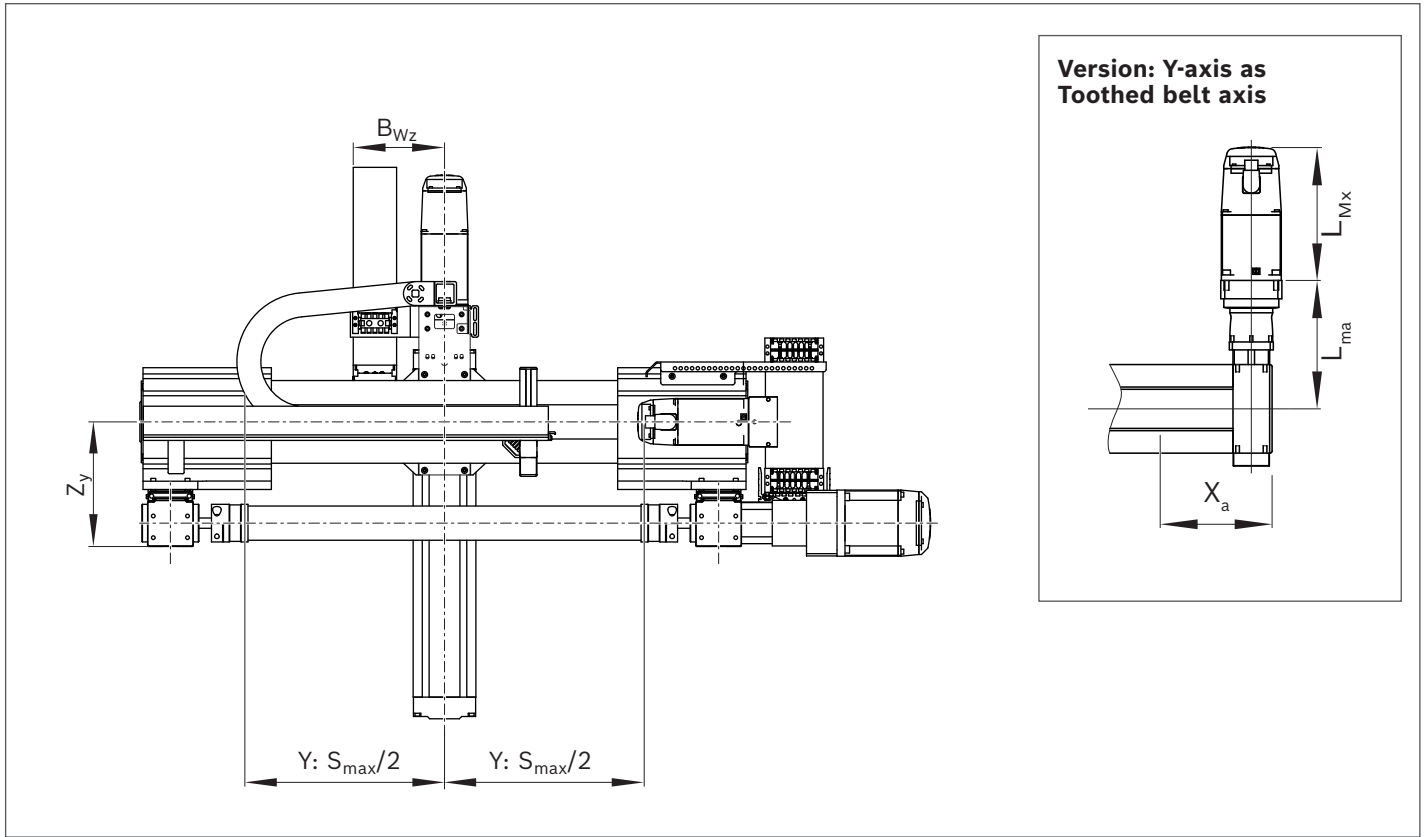

Type	Dimensions (mm)																
	R _x	R _y	X _a	X _s	B _{wx}	B _{wy}	B _{ez}	C _{Px}	L _{X1}	L _{ma}	L _{Mx}	Z _u	Z _o	Z _y	L _{My}	L _{Mz}	B _{wz}
3SB-20	376	265	191.0	185.0	187.5	135.0	246.0	143.0	45.0	154.5	258.5	-74.5	360.0	183.0	226.5	194.5	140.0
3SB-21	376	265	191.0	185.0	187.5	135.0	246.0	143.0	45.0	154.5	258.5	-74.5	360.0	183.0	226.5	194.5	140.0
3SB-22	376	265	191.0	185.0	187.5	135.0	246.0	143.0	45.0	154.5	258.5	-57.5	384.0	183.0	226.5	258.5	140.0
3SB-23	376	265	191.0	185.0	187.5	135.0	246.0	143.0	45.0	154.5	258.5	-57.5	384.0	183.0	226.5	258.5	140.0
3SB-30	481	261	240.5	240.5	195.0	160.0	245.0	147.5	50.0	207.5	261.0	-88.0	419.5	218.5	258.5	258.5	160.0
3SB-31	481	261	240.5	240.5	195.0	160.0	245.0	147.5	50.0	207.5	261.0	-88.0	419.5	218.5	290.0	258.5	160.0
3SB-40	578	347	283.0	295.0	210.0	127.0	339.5	233.5	59.0	264.0	317.0	132.0	515.5	282.0	261.0	258.5	160.0
3SB-41	578	347	283.0	295.0	210.0	127.0	339.5	233.5	59.0	264.0	317.0	132.0	515.5	282.0	375.0	258.5	160.0
3SB-50	715	347	370.5	344.5	225.0	127.0	383.5	256.5	84.0	324.5	176.0	-76.0	683.0	323.0	165.0	301.0	185.0
3SB-61	715	459	370.5	344.5	255.0	70.5	361.0	233.0	129.5	324.5	205.0	-27.5	634.5	274.5	176.0	301.0	182.5

Type 3SC

Product description





- ▶ 3D gantries are flexible and performance-optimized units for positioning in the three-dimensional working range. They comprise mechanically coupled linear modules with toothed belt drive in the x-direction, compact modules with ball screw assembly or toothed belt drive in the y-direction and a compact module axis with ball screw assembly in the z-direction.
- ▶ By arranging the motor of the X-axis via a T-gear between the linear axes, higher drive torques can be transmitted. A continuous angle in the Y-axis ensures the required rigidity.
- ▶ 6 sizes

Technical data

Type	Axis	Linear axis	BASA: d _o x P Toothed belt: Gear ratio i	v _{max} (m/s)	M _P max (Nm)	a _{max} (m/s ²)	s _{min} (mm)	s _{min_EC} (mm)	s _{max} (mm)	Motor attachment	Motor	m _{ex} max (kg)
3SC - 22	Z	CKK-110-NN-1	16 x 5	0.38	6.76	15.0	50	50	1 325	Flange/ coupling	MS2N04	34.5
			16 x 10	0.77	13.51							
			16 x 16	1.23	16.50							
	Y	CKK-110-NN-1	16 x 5	0.38	6.76	15.0	380	380	1 205	Belt side drive, i = 1	MS2N04	
			16 x 10	0.77	7.66							
			16 x 16	1.23	7.66							
	X	MKR-080-NN-3	i = 7	2.69	8.74	15.0	60	85	3 000	Gearing	MS2N06	
			i = 12	1.28	5.10							
			i = 16	0.96	3.83							
3SC - 23	Z	CKK-110-NN-1	16 x 5	0.38	6.76	15.0	50	50	1 325	Flange/ coupling	MS2N04	34.5
			16 x 10	0.77	13.51							
			16 x 16	1.23	16.50							
	Y	CKR-110-NN-1	-	-	-	15.0	380	380	2 640	Gearing (NP 005)	MS2N04	
			i = 5	4.40	2.72							
			i = 10	2.20	1.26							
	X	MKR-080-NN-3	i = 7	2.69	8.74	15.0	60	85	3 000	Gearing	MS2N06	
			i = 12	1.28	5.10							
			i = 16	0.96	3.83							
3SC - 30	Z	CKK-110-NN-1	16 x 5	0.38	6.76	15.0	50	50	1 325	Flange/ coupling	MS2N04	34.5
			16 x 10	0.77	13.51							
			16 x 16	1.23	16.50							
	Y	CKK-145-NN-1	20 x 5	0.30	8.22	15.0	550	550	1 460	Belt side drive, i = 1	MS2N04	
			25 x 10	0.63	8.22							
			20 x 20	1.27	8.22							
	X	MKR-110-NN-3	i = 7	3.45	24.29	15.0	60	60	3 000	Gearing	MS2N07	
			i = 12	1.81	14.17							
			i = 16	1.36	10.63							
3SC - 31	Z	CKK-110-NN-1	16 x 5	0.38	6.76	15.0	50	50	1 325	Flange/ coupling	MS2N04	34.5
			16 x 10	0.77	13.51							
			16 x 16	1.23	16.50							
	Y	CKR-145-NN-1	i = 3	5.00	11.00	15.0	550	550	2 580	Gearing (NP 015)	MS2N05	
			i = 5	5.00	6.70							
			i = 10	2.92	3.35							
	X	MKR-110-NN-3	i = 7	3.45	24.29	15.0	60	60	3 000	Gearing	MS2N07	
			i = 12	1.81	14.17							
			i = 16	1.36	10.63							
3SC - 40	Z	CKK-145-NN-1	20 x 5	0.30	11.01	15.0	60	60	1 590	Flange/ coupling	MS2N04	65.5
			25 x 10	0.63	22.02							
			20 x 20	1.27	29.60							
	Y	CKK-200-NN-1	32 x 5	0.30	19.01	15.0	510	510	1 825	Belt side drive, i = 1	MS2N06	
			32 x 10	0.50	19.21							
			32 x 20	1.00	19.21							
	X	MKR-110-NN-3	32 x 32	1.60	19.21	15.0	60	60	3 000	Gearing	MS2N07	
			i = 7	3.45	24.29							
			i = 12	1.81	14.17							
3SC - 41	Z	CKK-145-NN-1	20 x 5	0.30	11.01	15.0	60	60	1 590	Flange/ coupling	MS2N04	65.5
			25 x 10	0.63	22.02							
			20 x 20	1.27	29.60							
	Y	CKR-200-NN-1	i = 3	5.00	38.73	15.0	345	345	2 374	Gearing (NP 035)	MS2N07	
			i = 5	5.00	23.24							
			i = 10	2.50	11.62							
	X	MKR-110-NN-3	i = 7	3.45	24.29	15.0	60	60	3 000	Gearing	MS2N07	
			i = 12	1.81	14.17							
			i = 16	1.36	10.63							

Dimension drawings

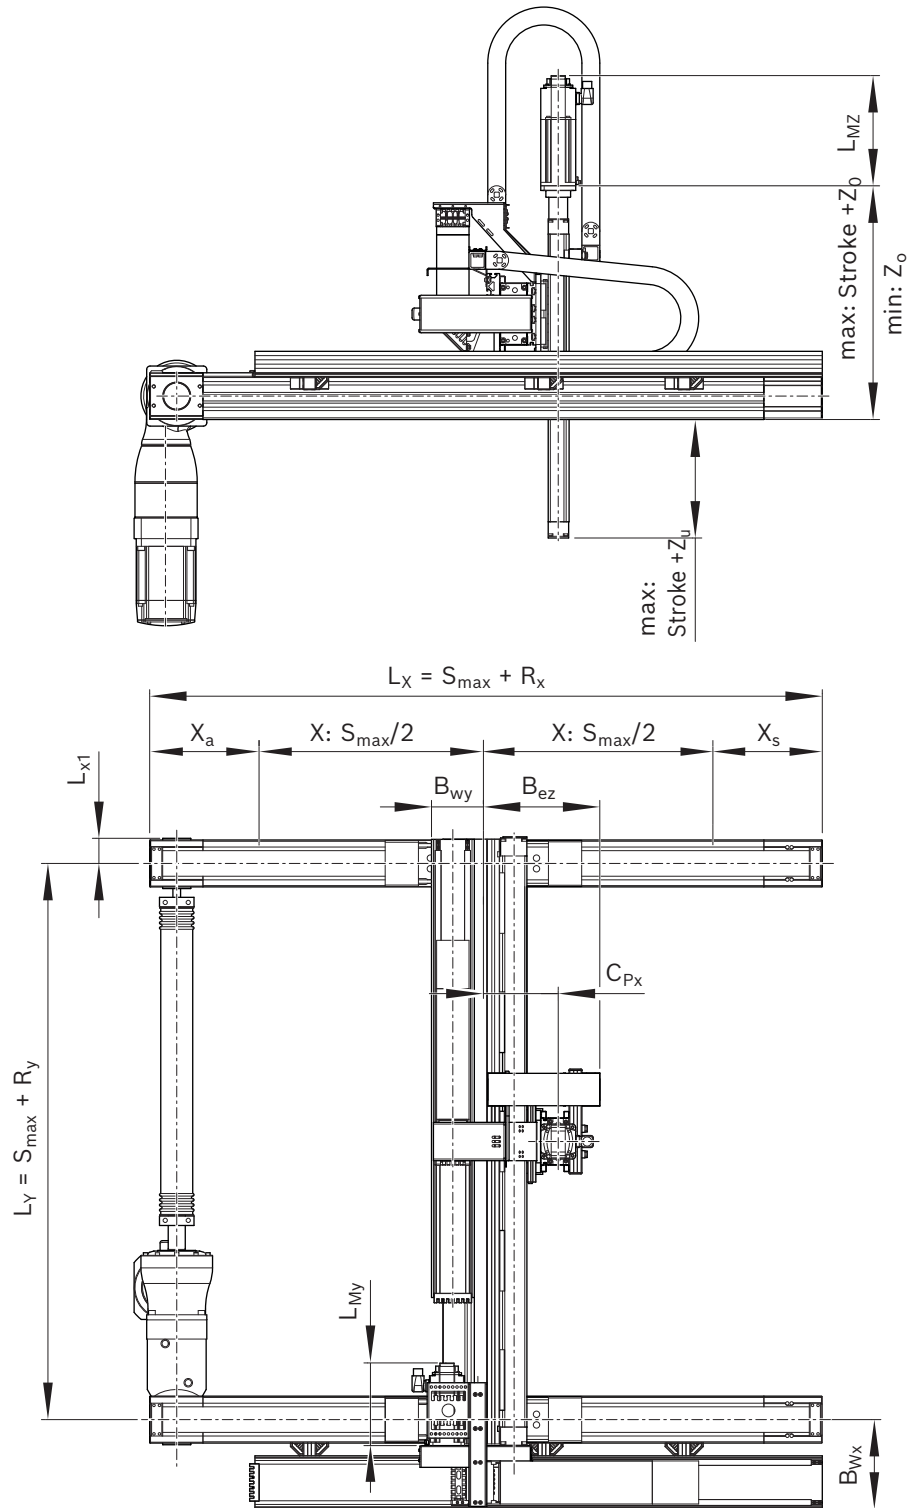

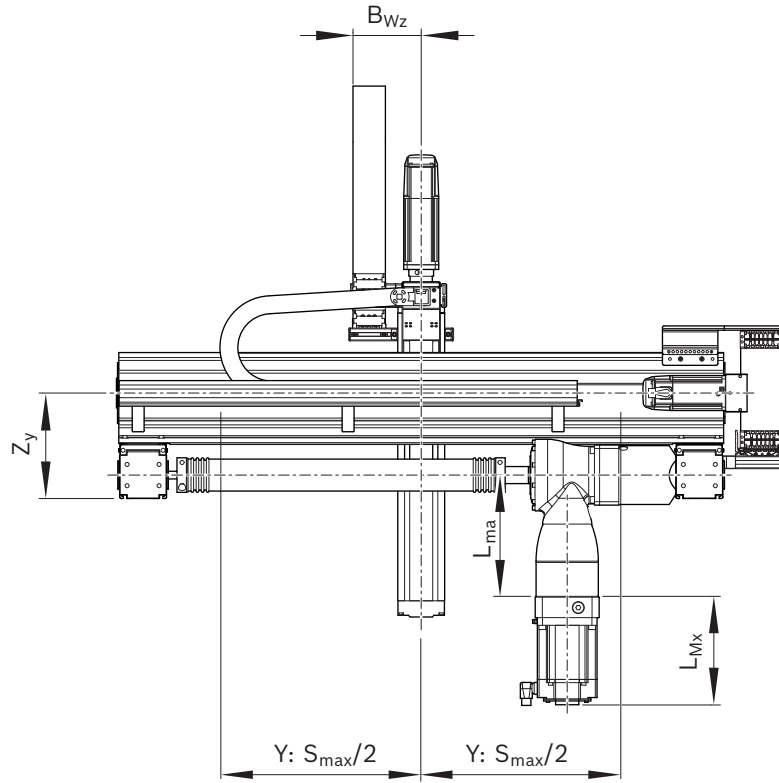

Type	Dimensions (mm)																
	R _x	R _y	X _a	X _s	B _{wx}	B _{wy}	B _{ez}	C _{Px}	L _{X1}	L _{ma}	L _{Mx}	Z _u	Z _o	Z _y	L _{My}	L _{Mz}	B _{wz}
3SC-22	481	263	191.0	185.0	195.0	130	251.5	154.0	50	253.5	184	-72.5	399.0	198.0	194.0	258.5	140
3SC-23	481	263	191.0	185.0	195.0	130	251.5	154.0	50	253.5	184	-72.5	399.0	198.0	162.0	258.5	140
3SC-30	578	305	283.0	295.0	210.0	122	273.0	175.5	59	334.5	205	-122.0	448.5	247.5	140.0	258.5	160
3SC-31	578	305	283.0	295.0	210.0	122	273.0	175.5	59	334.5	205	-122.0	448.5	247.5	188.0	258.5	160
3SC-40	578	347	283.0	295.0	210.0	127	339.5	233.5	59	334.5	205	-132.0	515.5	282.0	164.0	258.5	160
3SC-41	578	347	283.0	295.0	210.0	127	339.5	233.5	59	334.5	205	-132.0	515.5	282.0	176.0	258.5	160

Type 2HA

Product description




- The cantilever system 2D cantilever surface is particularly suitable for applications in which the axis system enters the working range from the outside.
- Compact modules with ball screw assembly or toothed belt drive are available for the X-axis.
- 12 sizes


Technical data

Type	Axis	Linear axis	BASA: d _o x P Toothed belt: Gear ratio i	v _{max} (m/s)	M _{P max} (Nm)	a _{max} (m/s ²)	s _{min} (mm)	s _{min_EC} (mm)	s _{max} (mm)	Motor attachment	Motor	m _{ex max} (kg)
2HA - 08	Y	CKK-070- NN-1	12 x 2	0.23	0.79	15.0	135	135	485	Belt side drive, i = 1	MS2N03	5.0
			12 x 5	0.57	2.39							
			12 x 10	1.13	4.42							
	X	CKK-090-NN-1	12 x 2	0.23	0.79	15.0	40	515	600	Belt side drive, i = 1	MS2N03	
			12 x 5	0.57	2.39							
			12 x 10	1.13	4.42							
2HA - 09	Y	CKK-070- NN-1	12 x 2	0.23	0.79	15.0	135	135	485	Belt side drive, i = 1	MS2N03	5.0
			12 x 5	0.57	2.39							
			12 x 10	1.13	4.42							
	X	CKR-090- NN-1	i = 5	3.0	1.6	15.0	40	200	3 000	Gearing	MS2N03	
			i = 10	1.5	0.8							
2HA - 10	Y	CKK-090-NN-1	12 x 2	0.23	0.79	15.0	70	305	520	Belt side drive, i = 1	MS2N03	13.0
			12 x 5	0.57	2.39							
			12 x 10	1.13	4.42							
	X	CKK-110- NN-1	16 x 5	0.38	6.76	15.0	50	550	1 325	Belt side drive, i = 1	MS2N04	
			16 x 10	0.77	7.66							
			16 x 16	1.23	7.66							
2HA - 11	Y	CKK-090-NN-1	12 x 2	0.23	0.79	15.0	70	305	520	Belt side drive, i = 1	MS2N03	13.0
			12 x 5	0.57	2.39							
			12 x 10	1.13	4.42							
	X	CKR-110- NN-1	i = 5	5.0	2.7	15.0	50	160	3 000	Gearing	MS2N04	
			i = 10	5.0	1.4							

Type	Axis	Linear axis	BASA: d _o x P Toothed belt: Gear ratio i	v _{max} (m/s)	M _P max (Nm)	a _{max} (m/s ²)	s _{min} (mm)	s _{min_EC} (mm)	s _{max} (mm)	Motor attachment	Motor	m _{ex} max (kg)
2HA - 20	Y	CKK-110- NN-1	16 x 5	0.38	6.76	15	50	350	725	Belt side drive, i = 1	MS2N04	25.0
			16 x 10	0.77	7.66							
			16 x 16	1.23	7.66							
	X	CKK-110- NN-1	16 x 5	0.38	6.76	15	50	550	1 325	Belt side drive, i = 1	MS2N04	
			16 x 10	0.77	7.66							
			16 x 16	1.23	7.66							
2HA - 21	Y	CKK-110- NN-1	16 x 5	0.38	6.76	15	50	350	725	Belt side drive, i = 1	MS2N04	25.0
			16 x 10	0.77	7.66							
			16 x 16	1.23	7.66							
	X	CKR-110- NN-1	–	–	–	15	50	220	3 000	Gearing	MS2N04	
			i = 5	5.00	2.70							
			i = 10	5.00	1.30							
2HA - 22	Y	CKK-110- NN-1	16 x 5	0.38	6.76	15	50	350	1 050	Belt side drive, i = 1	MS2N04	44.5
			16 x 10	0.77	7.66							
			16 x 16	1.23	7.66							
	X	CKK-145- NN-1	20 x 5	0.30	8.22	15	60	565	1 590	Belt side drive, i = 1	MS2N04	
			25 x 10	0.63	8.22							
			20 x 20	1.27	8.22							
2HA - 23	Y	CKK-110- NN-1	16 x 5	0.38	6.76	15	50	350	1 050	Belt side drive, i = 1	MS2N04	44.5
			16 x 10	0.77	7.66							
			16 x 16	1.23	7.66							
	X	CKR-145- NN-1	i = 3	5.00	11.0	15	60	210	3 000	Gearing	MS2N05	
			i = 5	5.00	6.70							
			i = 10	5.00	3.40							
2HA - 30	Y	CKK-145- NN-1	20 x 5	0.30	8.22	15	60	400	1 050	Belt side drive, i = 1	MS2N04	52.0
			25 x 10	0.63	8.22							
			20 x 20	1.27	8.22							
	X	CKK-145- NN-1	20 x 5	0.30	8.22	15	60	565	1 590	Belt side drive, i = 1	MS2N04	
			25 x 10	0.63	8.22							
			20 x 20	1.27	8.22							
2HA - 31	Y	CKK-145- NN-1	20 x 5	0.30	8.22	15	60	400	1 050	Belt side drive, i = 1	MS2N04	52.0
			25 x 10	0.63	8.22							
			20 x 20	1.27	8.22							
	X	CKR-145- NN-1	i = 3	5.00	11.00	15	60	210	3 000	Gearing	MS2N05	
			i = 5	5.00	6.70							
			i = 10	5.00	3.40							
2HA - 32	Y	CKK-145- NN-1	20 x 5	0.30	8.22	15	60	400	1 200	Belt side drive, i = 1	MS2N04	82.0
			25 x 10	0.63	8.22							
			20 x 20	1.27	8.22							
	X	CKK-200- NN-1	32 x 5	0.30	19.01	15	80	405	1 825	Belt side drive, i = 1	MS2N06	
			32 x 10	0.50	19.21							
			32 x 20	1.00	19.21							
2HA - 33	Y	CKK-145- NN-1	20 x 5	0.30	8.22	15	60	400	1 200	Belt side drive, i = 1	MS2N04	82.0
			25 x 10	0.63	8.22							
			20 x 20	1.27	8.22							
	X	CKR-200- NN-1	i = 3	5.00	38.70	15	80	150	3 000	Gearing	MS2N07	
			i = 5	5.00	23.20							
			i = 10	5.00	11.60							

Dimension drawings

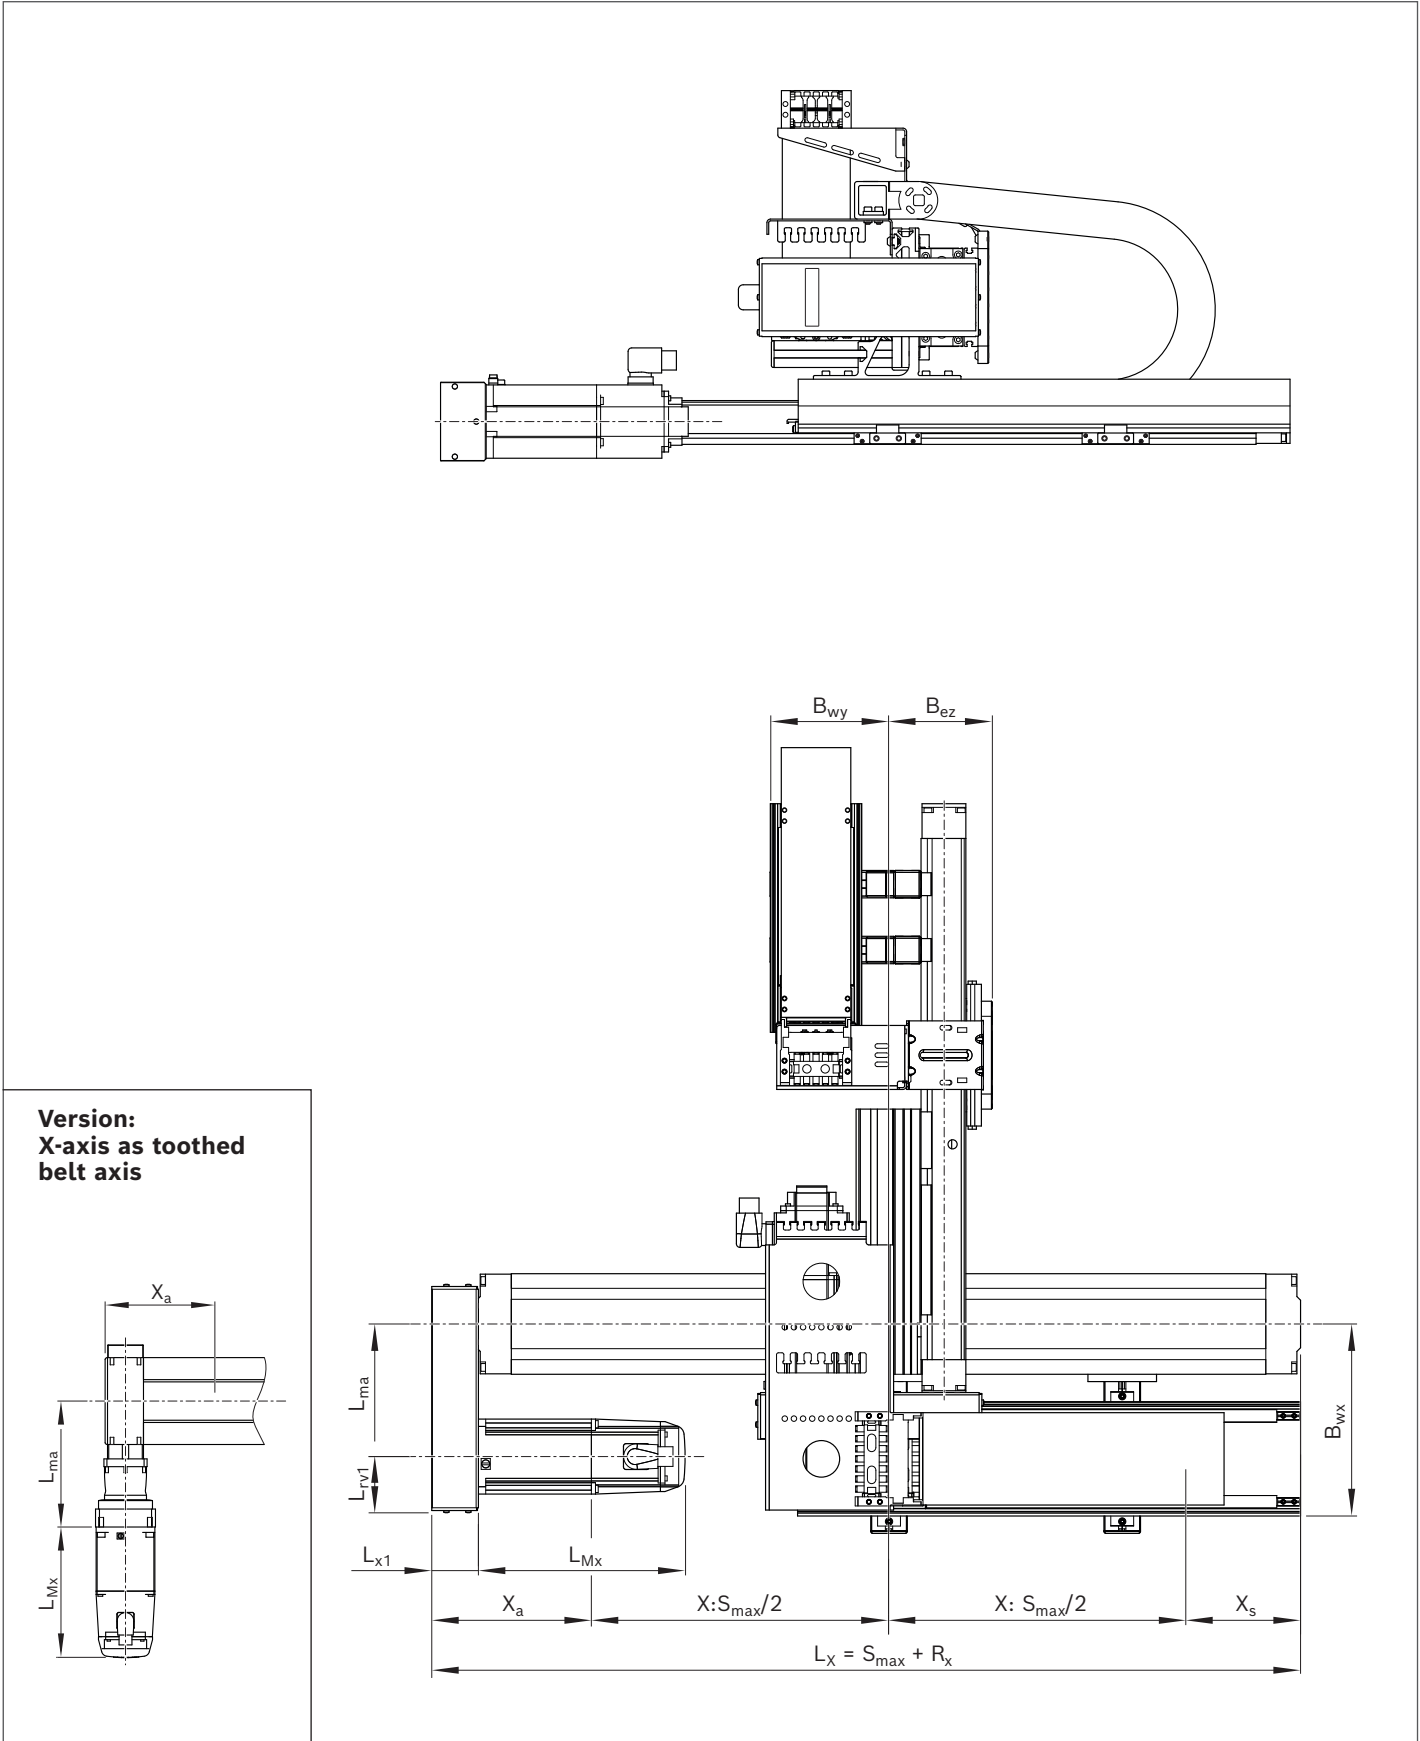

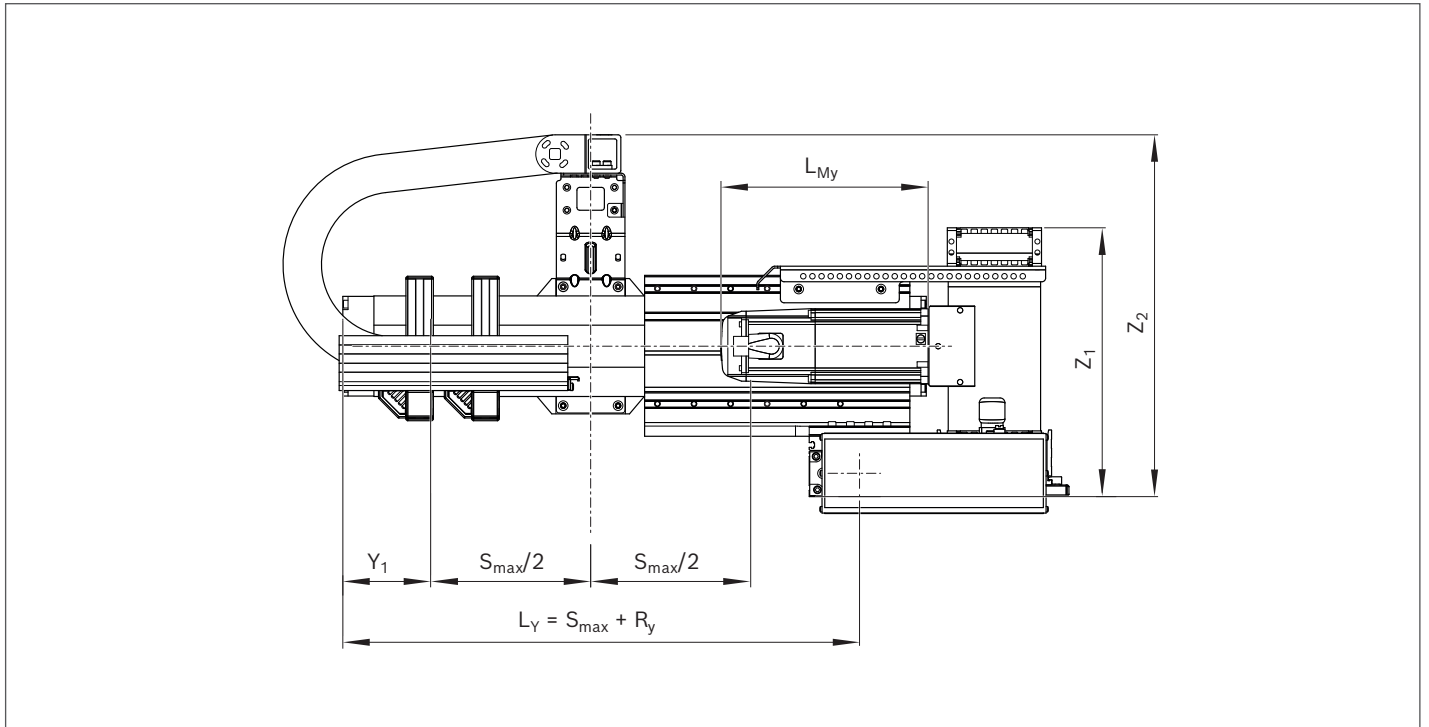

Type	Dimensions (mm)														
	R_x	R_y	X_a	X_s	B_{wx}	Y_1	B_{wy}	B_{ez}	L_{x1}	L_{ma}	L_{rv1}	L_{Mx} (max)	L_{My} (max)	Z_1	Z_2
2HA-08	252.5	168.0	144.0	108.5	200.0	80.5	-	42.5	37	103.5	40.5	203.5	163.5	295	-
2HA-09	289.5	168.0	149.5	140.0	200.0	80.5	-	42.5	-	140.9	-	203.5	163.5	295	-
2HA-10	300.0	237.5	174.5	125.5	210.0	108.5	144.5	98.5	51	145.0	62.0	226.5	163.5	305	388
2HA-11	366.5	237.5	186.0	155.5	210.0	108.5	144.5	98.5	-	160.5	-	226.5	163.5	305	388
2HA-20	300.0	265.0	174.5	125.5	210.0	125.0	130.0	113.5	51	145.0	62.0	226.5	226.5	294	396
2HA-21	366.5	265.0	161.0	155.5	210.0	125.0	130.0	113.5	-	160.5	-	226.5	226.5	294	396
2HA-22	350.0	269.0	200.0	150.0	227.5	120.0	142.0	101.0	51	157.5	55.0	258.5	226.5	313	415
2HA-23	400.5	269.0	196.5	204.0	227.5	120.0	142.0	101.0	-	210.5	-	290.0	226.5	313	415
2HA-30	350.0	345.0	200.0	150.0	227.5	149.5	127.0	135.0	51	157.5	55.0	258.5	258.5	350	450
2HA-31	400.5	345.0	196.5	150.0	227.5	149.5	127.0	135.0	-	210.5	-	290.0	258.5	350	450
2HA-32	546.0	345.0	301.0	245.0	255.0	149.5	132.0	125.0	66	267.5	76.0	261.0	258.5	392	492
2HA-33	649.0	345.0	319.0	330.0	255.0	149.5	132.0	125.0	-	329.0	-	317.0	258.5	392	492

Type 2HB

Product description




- ▶ The 2D area gantry is dynamically positioned in the x-axis via 2 mechanically coupled linear modules with toothed belt drive.
- ▶ The precise transverse motion in the y-axis is realized by compact modules with ball screw assembly or toothed belt drive.
- ▶ 8 sizes


Technical data

Type	Axis	Linear axis	BASA: d _o x P Toothed belt: Gear ratio i	v _{max} (m/s)	M _{p max} (Nm)	a _{max} (m/s ²)	s _{min} (mm)	s _{min_EC} (mm)	s _{max} (mm)	Motor attachment	Motor	m _{ex max} (kg)
2HB - 20	Y	CKK-110-NN-1	16 x 5	0.38	6.76	15.0	90	300	1 219	Belt side drive, i = 1	MS2N04	25.0
			16 x 10	0.77	7.66							
			16 x 16	1.23	7.66							
	X	MKR-065-NN-3	i = 3	5.00	4.00	15.0	60	170	3 000	Gearing	MS2N04	
			i = 5	4.50	2.40							
			i = 10	2.30	1.20							
2HB - 21	Y	CKR-110-NN-1	i = 5	4.40	2.72	15.0	90	200	2 869	Gearing	MS2N04	36.0
			i = 10	2.20	1.26							
	X	MKR-065-NN-3	i = 3	5.00	4.00	15.0	60	170	3 000	Gearing	MS2N04	
			i = 5	4.50	2.40							
			i = 10	2.30	1.20							
	2HB - 30	Y	CKK-145-NN-1	20 x 5	0.30	8.22	15.0	100	400	1 523	Belt side drive, i = 1	
25 x 10				0.63	8.22							
20 x 20				1.27	8.22							
X		MKR-080-NN-3	i = 3	5.00	4.00	15.0	60	100	3 000	Gearing	MS2N06	
			i = 5	4.50	2.40							
			i = 10	2.30	1.20							

Type	Axis	Linear axis	BASA: d _o x P Toothed belt: Gear ratio i	v _{max} (m/s)	M _P max (Nm)	a _{max} (m/s ²)	s _{min} (mm)	s _{min_EC} (mm)	s _{max} (mm)	Motor attachment	Motor	m _{ex} max (kg)
2HB - 31	Y	CKR-145-NN-1	i = 3	5.00	11.00	15.0	60	140	2 869	Gearing	MS2N05	82.0
			i = 5	5.00	6.70							
			i = 10	2.92	3.35							
	X	MKR-080-NN-3	i = 3	5.00	4.00	15.0	60	100	3 000	Gearing	MS2N06	
			i = 5	4.50	2.40							
			i = 10	2.30	1.20							
2HB - 40	Y	CKK-200-NN-1	32 x 5	0.30	19.01	15.0	130	360	1 770	Belt side drive, i = 1	MS2N06	100.0
			32 x 10	0.50	19.21							
			32 x 20	1.00	19.21							
			32 x 32	1.60	19.21							
	X	MKR-110-NN-3	i = 3	5.00	33.30	15.0	60	60	3 000	Gearing	MS2N07	
			i = 5	4.00	20.00							
			i = 10	2.00	10.00							
			2HB - 41	Y	CKR-200-NN-1							
i = 5	5.00	23.24										
i = 10	2.50	11.62										
X	MKR-110-NN-3	i = 3		5.00	33.30	15.0	60	60	3 000	Gearing	MS2N07	
		i = 5		4.00	20.00							
		i = 10		2.00	10.00							
2HB - 50	Y	CKK-200-NN-1	32 x 5	0.30	19.01	15.0	80	360	1 680	Belt side drive, i = 1	MS2N06	195.0
			32 x 10	0.50	19.21							
			32 x 20	1.00	19.21							
			32 x 32	1.60	19.21							
	X	MKR-140-NN-3	i = 5	5.00	60.00	15.0	80	80	3 000	Gearing	MS2N07	
			i = 12	3.20	25.00							
			i = 16	2.40	18.75							
			2HB - 61	Y	MKR-145-NN-2							
i = 5	5.00	20.00										
i = 10	3.10	10.00										
X	MKR-140-NN-3	i = 5		5.00	60.00	15.0	80	80	3 000	Gearing	MS2N07	
		i = 12		3.20	25.00							
		i = 16		2.40	18.75							

Dimension drawings

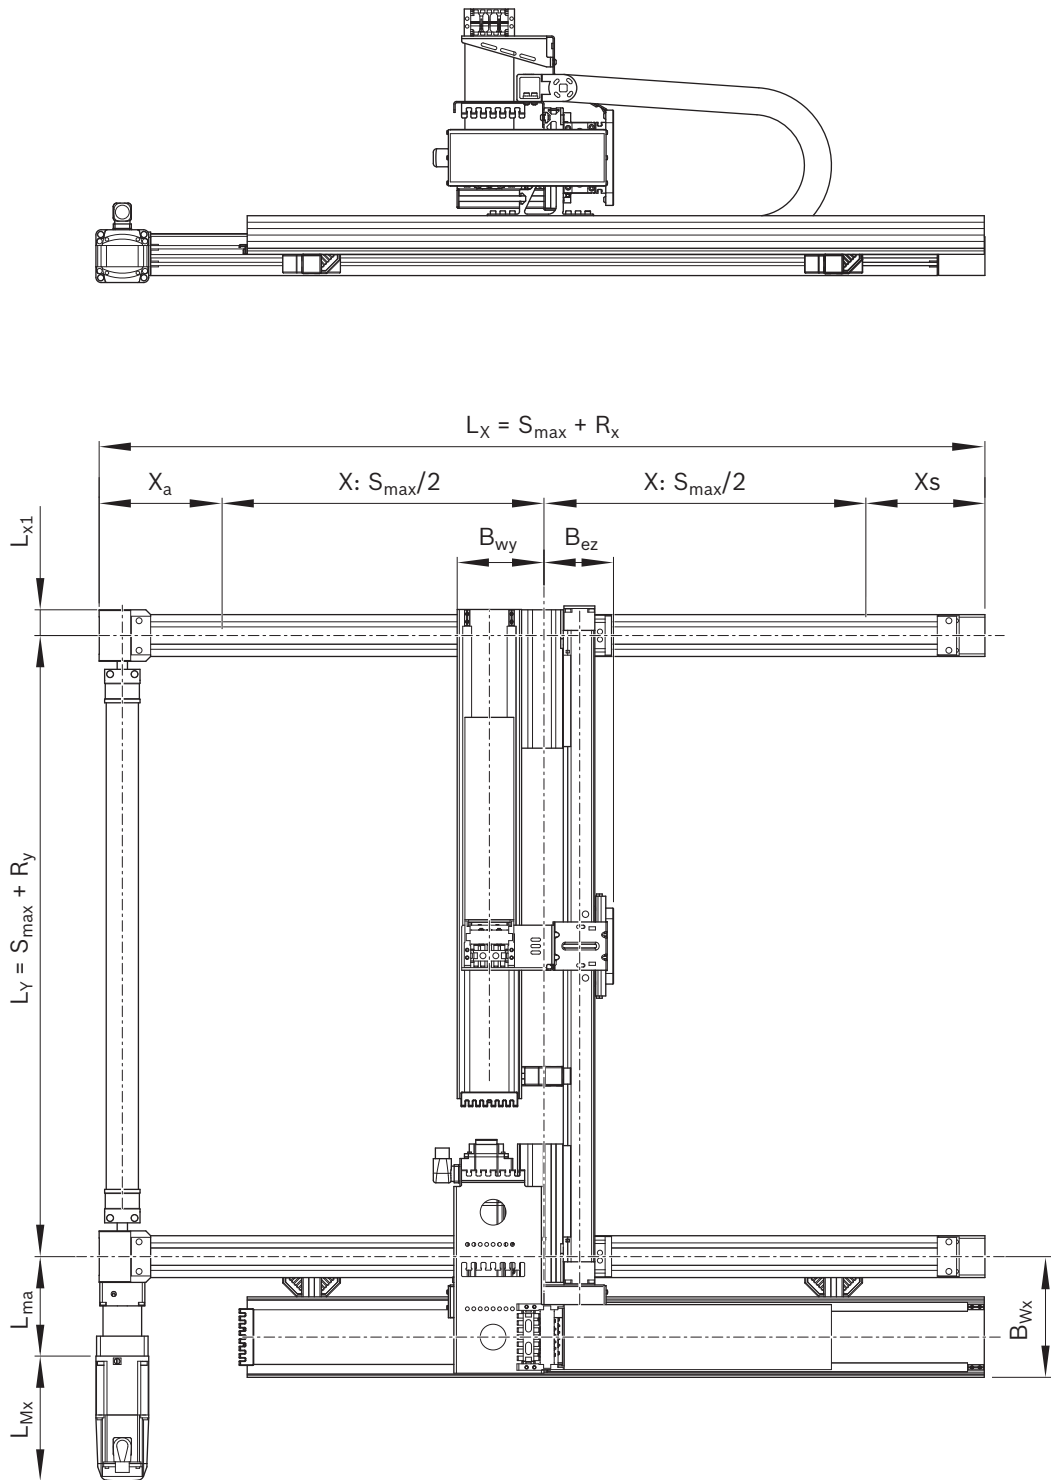


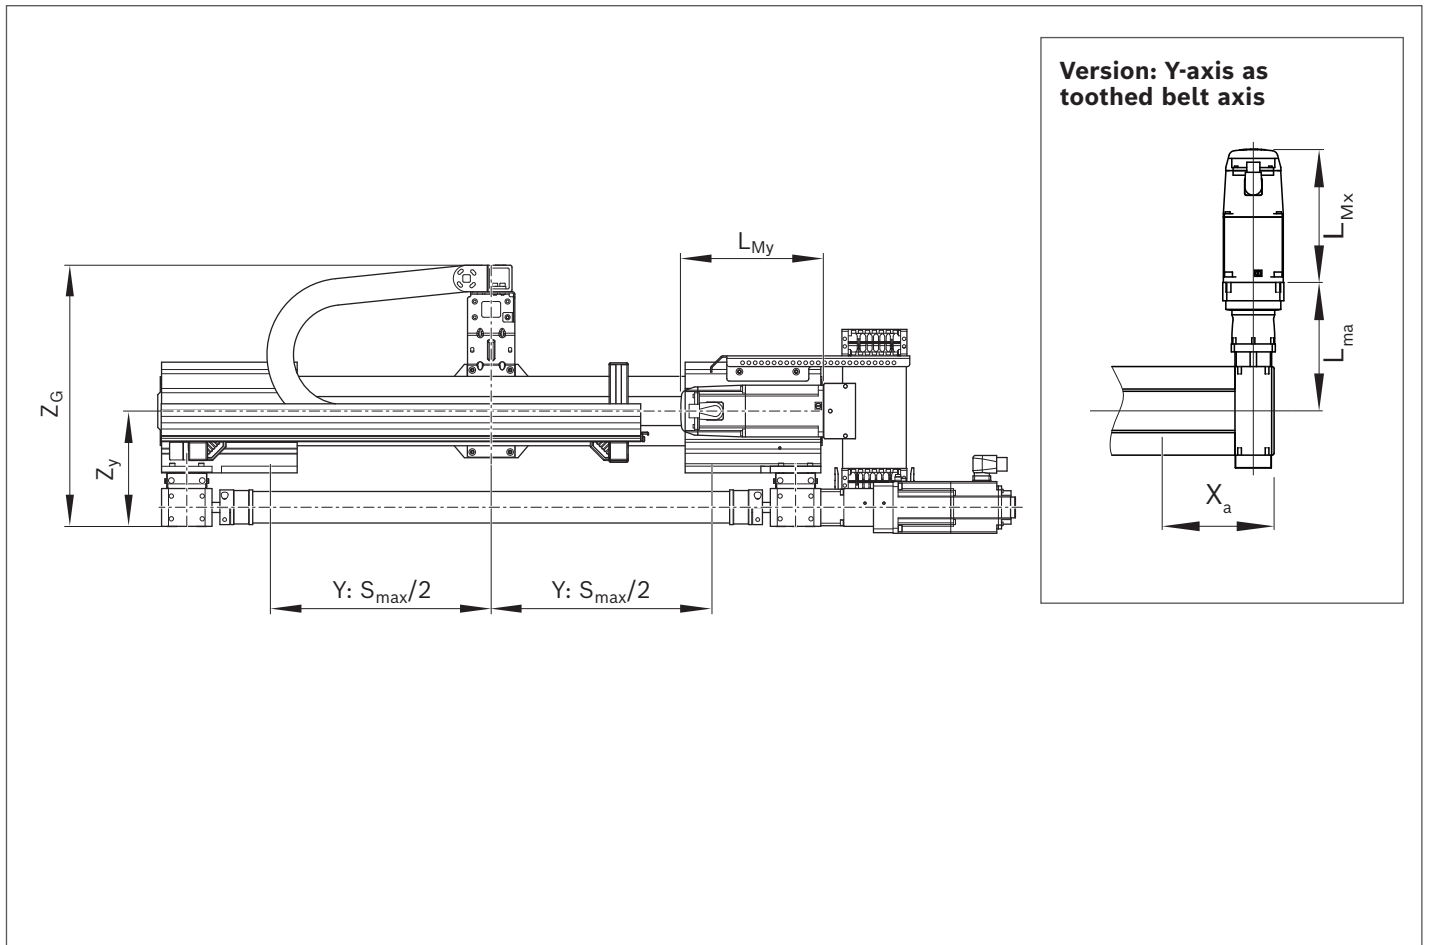

Type	Dimensions (mm)												
	R _x	R _y	X _a	X _s	B _{wx}	B _{wy}	B _{ez}	L _{x1}	L _{ma}	Z _y	Z _G	L _{Mx}	L _{My}
2HB-20	376	265	191.0	185.0	187.5	135.0	88.0	40	154.5	183.0	415	258.5	226.5
2HB-21	376	265	191.0	185.0	187.5	135.0	88.0	40	154.5	183.0	415	258.5	226.5
2HB-30	481	261	240.5	240.5	195.0	160.0	107.0	50	207.5	218.5	465	261.0	258.5
2HB-31	481	261	240.5	240.5	195.0	160.0	107.0	50	207.5	218.5	465	261.0	290.0
2HB-40	578	347	283.0	295.0	210.0	127.0	182.5	59	264.0	282.0	548	317.0	261.0
2HB-41	578	347	283.0	295.0	210.0	127.0	182.5	59	264.0	282.0	548	317.0	375.0
2HB-50	715	347	370.5	344.5	225.0	127.0	182.5	84	324.5	323.0	603	176.0	165.0
2HB-51	715	459	370.5	344.5	255.0	70.5	162.0	84	324.5	274.5	672	205.0	176.0

Type 2VA

Product description

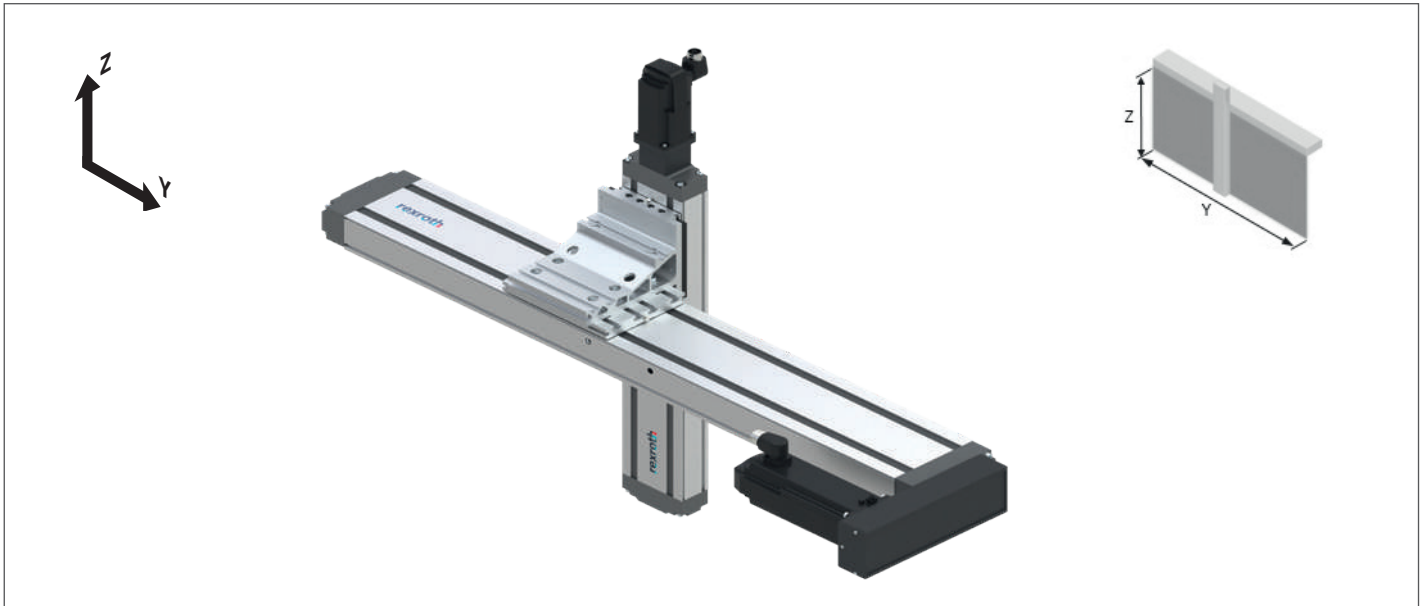



- ▶ 2D line gantries cover applications with horizontal and vertical motion direction.
- ▶ Compact modules with the drive versions of ball screw assembly or toothed belt drive are available for the x-axis.
- ▶ 8 sizes

Technical data

Type	Axis	Linear axis	BASA: d _o x P Toothed belt: Gear ratio i	v _{max} (m/s)	M _P max (Nm)	a _{max} (m/s ²)	s _{min} (mm)	s _{min_EC} (mm)	s _{max} (mm)	Motor attachment	Motor	m _{ex} max (kg)
2VA - 20	Z	CKK-090-NN-1	12 x 2	0.23	0.79	15.0	40	40	600	Flange/ coupling	MS2N03	10.0
			12 x 5	0.57	2.39							
			12 x 10	1.13	4.42							
	Y	CKK-110-NN-1	16 x 5	0.38	6.76	15.0	50	480	1 325	Belt side drive, i = 1	MS2N04	
			16 x 10	0.77	7.66							
			16 x 16	1.23	7.66							
2VA - 21	Z	CKK-090-NN-1	12 x 2	0.23	0.79	15.0	40	40	600	Flange/ coupling	MS2N03	10.0
			12 x 5	0.57	2.39							
			12 x 10	1.13	4.42							
	Y	CKR-110-NN-1	i = 5	5.00	2.70	15.0	50	220	3 000	Gearing	MS2N04	
			i = 10	5.00	1.40							
2VA - 22	Z	CKK-110-NN-1	16 x 5	0.38	6.76	15.0	50	50	1 325	Flange/ coupling	MS2N04	32.5
			16 x 10	0.77	13.51							
			16 x 16	1.23	16.50							
	Y	CKK-110-NN-1	16 x 5	0.38	6.76	15.0	50	480	1 325	Belt side drive, i = 1	MS2N04	
			16 x 10	0.77	7.66							
			16 x 16	1.23	7.66							
2VA - 23	Z	CKK-110-NN-1	16 x 5	0.38	6.76	15.0	50	50	1 325	Flange/ coupling	MS2N04	32.5
			16 x 10	0.77	13.51							
			16 x 16	1.23	16.50							
	Y	CKR-110-NN-1	i = 5	5.00	2.70	15.0	50	220	3 000	Gearing	MS2N04	
			i = 10	5.00	1.40							
2VA - 30	Z	CKK-110-NN-1	16 x 5	0.38	6.76	15.0	50	50	1 325	Flange/ coupling	MS2N04	32.5
			16 x 10	0.77	13.51							
			16 x 16	1.23	16.50							
	Y	CKK-145-NN-1	20 x 5	0.30	8.22	15.0	60	495	1 590	Belt side drive, i = 1	MS2N04	
			25 x 10	0.63	8.22							
			20 x 20	1.27	8.22							
2VA - 31	Z	CKK-110-NN-1	16 x 5	0.38	6.76	15.0	50	50	1 325	Flange/ coupling	MS2N04	32.5
			16 x 10	0.77	13.51							
			16 x 16	1.23	16.50							
	Y	CKR-145-NN-1	i = 3	5.00	10.80	15.0	60	210	3 000	Gearing	MS2N05	
			i = 5	5.00	6.50							
			i = 10	5.00	3.30							
2VA - 32	Z	CKK-145-NN-1	20 x 5	0.30	11.01	15.0	60	60	1 590	Flange/ coupling	MS2N04	61.0
			25 x 10	0.63	22.02							
			20 x 20	1.27	29.60							
	Y	CKK-145-NN-1	20 x 5	0.30	8.22	15.0	60	495	1 590	Belt side drive, i = 1	MS2N04	
			25 x 10	0.63	8.22							
			20 x 20	1.27	8.22							
2VA - 33	Z	CKK-145-NN-1	20 x 5	0.30	11.01	15.0	60	60	1 590	Flange/ coupling	MS2N04	61.0
			25 x 10	0.63	22.02							
			20 x 20	1.27	29.60							
	Y	CKR-145-NN-1	i = 3	5.00	10.80	15.0	60	210	3 000	Gearing	MS2N05	
			i = 5	5.00	6.50							
			i = 10	5.00	3.30							

Dimension drawings

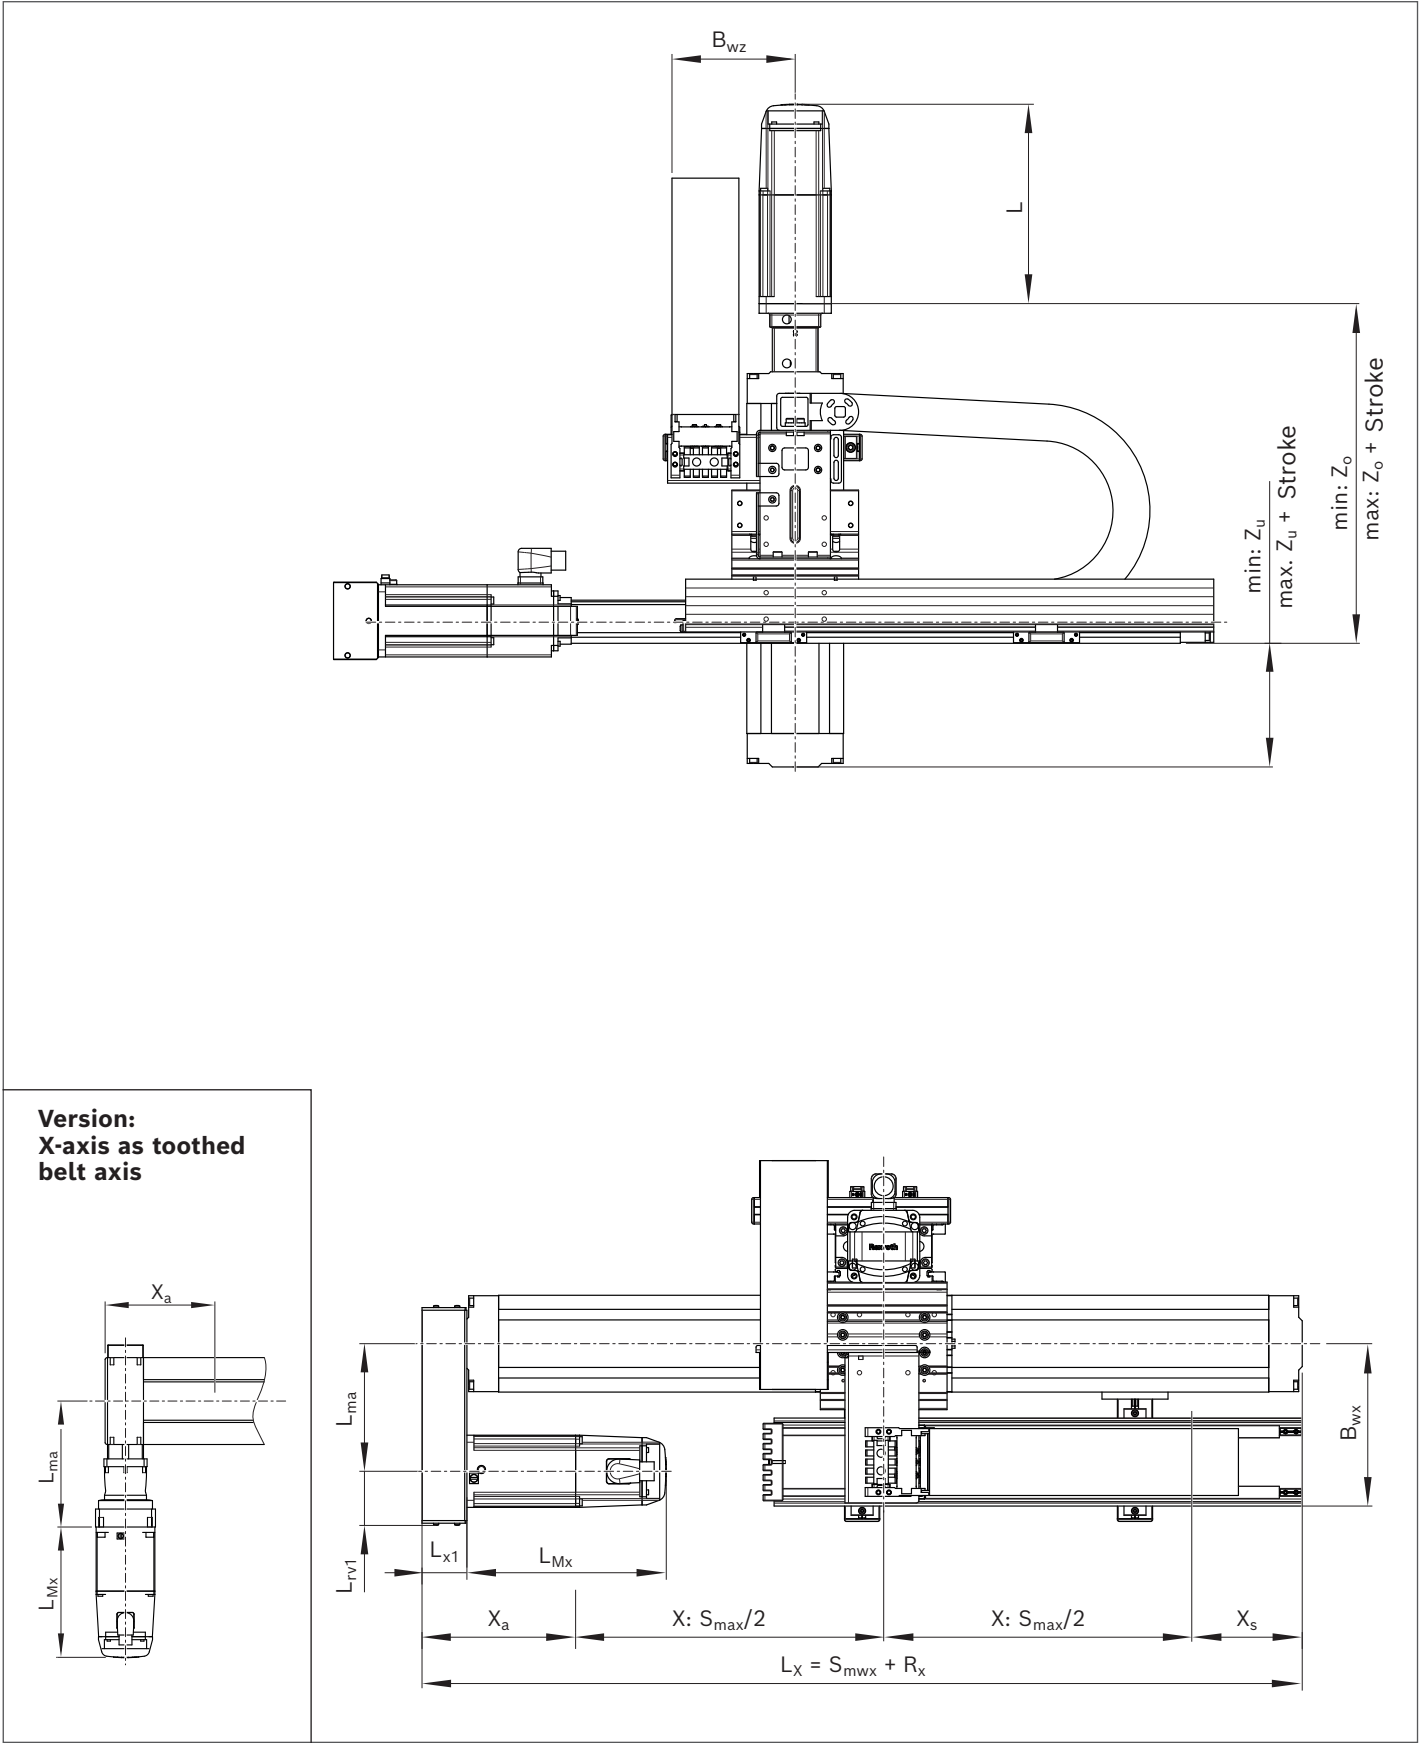


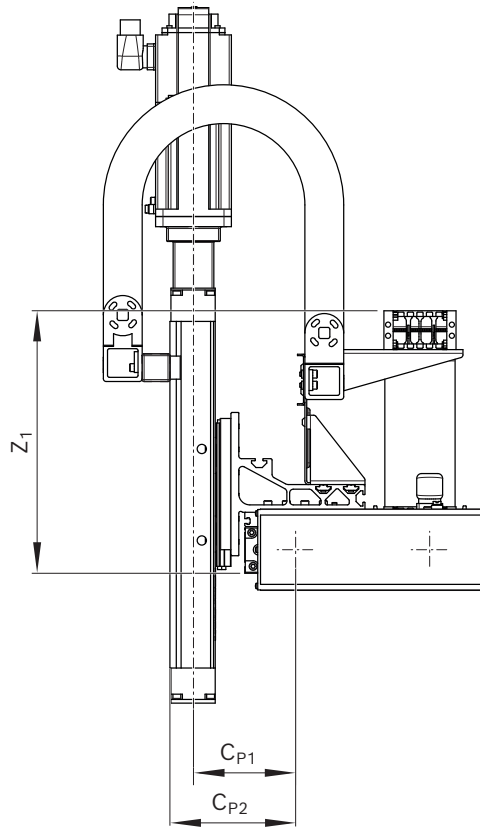

Type	Dimensions (mm)														
	R_x	X_a	X_s	B_{wx}	B_{wz}	CP_1	CP_2	Z_u	Z_o	Z_1	L_{x1}	L_{rv1}	L_{ma}	L_{Mx} (max)	L_{Mz} (max)
2VA-20	300.0	174.5	125.5	184.5	140	105.0	126.0	23.5	262.0	285	51	62	145.0	226.5	192.0
2VA-21	366.5	186.0	180.5	184.5	140	105.0	126.0	23.5	262.0	285	—	—	160.5	226.5	192.0
2VA-22	300.0	174.5	125.5	184.5	140	110.5	136.0	40.5	286.0	285	51	62	145.0	226.5	258.5
2VA-23	366.5	186.0	180.5	184.5	140	110.5	136.0	40.5	286.0	285	—	—	160.5	226.5	258.5
2VA-30	349.5	199.5	150.0	207.0	140	130.0	155.5	5.0	321.5	303	51	62	157.5	258.5	258.5
2VA-31	400.5	196.5	204.0	207.0	140	130.0	155.5	5.0	321.5	303	—	—	210.5	290.0	258.5
2VA-32	349.5	199.5	150.0	207.0	140	167.0	201.0	29.5	354.0	303	51	62	157.5	258.5	258.5
2VA-33	400.5	196.5	204.0	207.0	140	167.0	201.0	29.5	354.0	303	—	—	210.5	290.0	258.5

Type 2VB

Product description

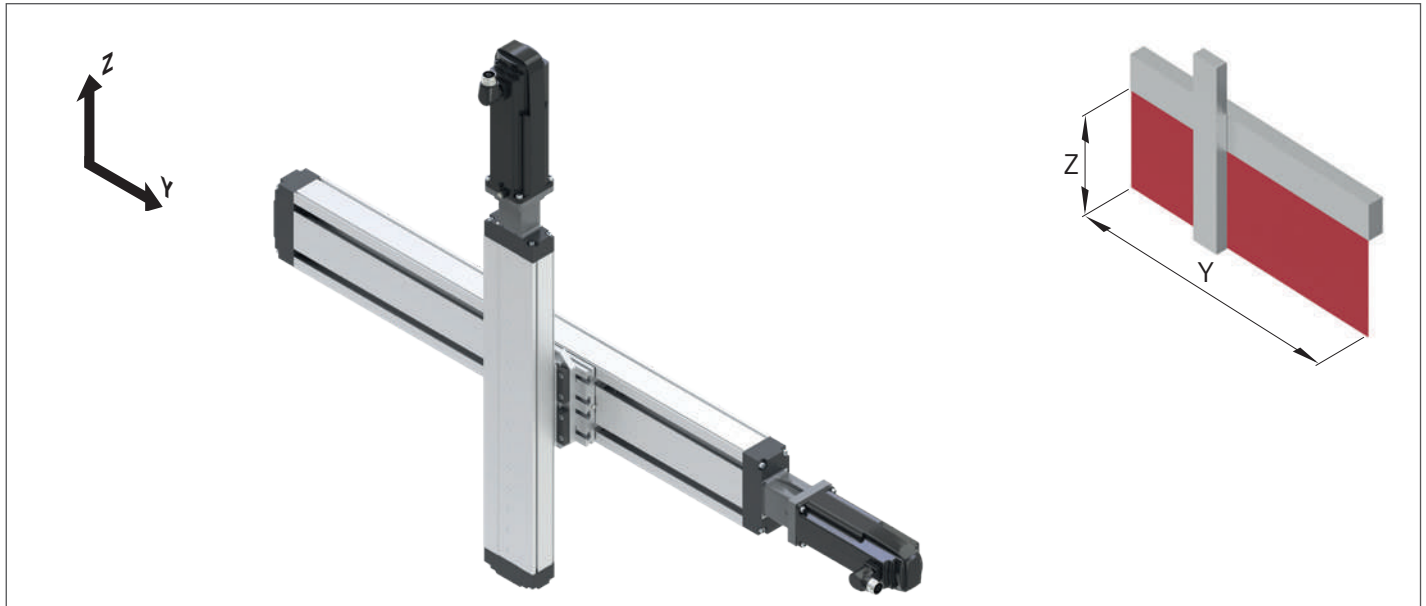


- 2D linear gantries of type 2VB are units for wall mounting and cover applications with horizontal and vertical movement directions. There are 12 sizes available for these application areas, offering compact modules in the X-axis with ball screw drive (CKK) or toothed belt drive (CKR) types.
- 12 sizes


Technical data

Type	Axis	Linear axis	BASA: d _o x P Toothed belt: Gear ratio i	v _{max} (m/s)	M _P max (Nm)	a _{max} (m/s ²)	s _{min} (mm)	s _{min_EC} (mm)	s _{max} (mm)	Motor attachment	Motor	m _{ex} max (kg)
2VB - 10	Z	CKK-070-NN-1	8 x 2.5	0.25	0.70	15.0	40	40	500	Flange/ coupling	MS2N03	2.0
			8 x 5	0.50	1.40							
	Y	CKK-090-NN-1	12 x 2	0.23	0.79	15.0	40	195	600	Flange/ coupling	MS2N03	
			12 x 5	0.57	2.39							
			12 x 10	1.13	4.42							
2VB - 11	Z	CKK-070-NN-1	8 x 2.5	0.25	0.70	15.0	40	40	500	Flange/ coupling	MS2N03	2.0
			8 x 5	0.50	1.40							
	Y	CKR-090-NN-1	i = 5	3.0	1.6	15.0	40	165	3 000	Gearing	MS2N03	
			i = 10	1.5	0.8							
2VB - 20	Z	CKK-090-NN-1	12 x 2	0.23	0.79	15.0	40	40	600	Flange/ coupling	MS2N03	7.0
			12 x 5	0.57	2.39							
			12 x 10	1.13	4.42							
	Y	CKK-110-NN-1	16 x 5	0.38	6.76	15.0	50	170	1 325	Flange/ coupling	MS2N04	
			16 x 10	0.77	7.66							
			16 x 16	1.23	7.66							
2VB - 21	Z	CKK-090-NN-1	12 x 2	0.23	0.79	15.0	40	40	600	Flange/ coupling	MS2N03	7.0
			12 x 5	0.57	2.39							
			12 x 10	1.13	4.42							
	Y	CKR-110-NN-1	i = 5	5.0	2.7	15.0	50	120	3 000	Gearing	MS2N04	
			i = 10	5.0	1.4							

Type	Axis	Linear axis	BASA: d _o x P Toothed belt: Gear ratio i	v _{max} (m/s)	M _P max (Nm)	a _{max} (m/s ²)	s _{min} (mm)	s _{min_EC} (mm)	s _{max} (mm)	Motor attachment	Motor	m _{ex} max (kg)
2VB - 22	Z	CKK-110-NN-1	16 x 5	0.38	6.76	15.0	50	50	1 325	Flange/ coupling	MS2N04	32.5
			16 x 10	0.77	7.66							
			16 x 16	1.23	7.66							
	Y	CKK-110-NN-1	16 x 5	0.38	6.76	15.0	50	170	1 325	Flange/ coupling	MS2N04	
			16 x 10	0.77	7.66							
			16 x 16	1.23	7.66							
2VB - 23	Z	CKK-110-NN-1	16 x 5	0.38	6.76	15.0	50	50	1 325	Flange/ coupling	MS2N04	32.5
			16 x 10	0.77	7.66							
			16 x 16	1.23	7.66							
	Y	CKR-110-NN-1	i = 5	5.0	2.7	15.0	50	120	3 000	Gearing	MS2N04	
			i = 10	5.0	1.4							
2VB - 30	Z	CKK-110-NN-1	16 x 5	0.38	6.76	15.0	50	50	1 325	Flange/ coupling	MS2N04	32.5
			16 x 10	0.77	13.51							
			16 x 16	1.23	16.50							
	Y	CKK-145-NN-1	20 x 5	0.30	8.22	15.0	60	135	1 590	Flange/ coupling	MS2N04	
			25 x 10	0.63	8.22							
			20 x 20	1.27	8.22							
2VB - 31	Z	CKK-110-NN-1	16 x 5	0.38	6.76	15.0	50	50	1 325	Flange/ coupling	MS2N04	32.5
			16 x 10	0.77	13.51							
			16 x 16	1.23	16.50							
	Y	CKR-145-NN-1	i = 3	5.0	10.8	15.0	60	115	3 000	Gearing	MS2N05	
			i = 5	5.0	6.5							
			i = 10	5.0	3.3							
2VB - 32	Z	CKK-145-NN-1	20 x 5	0.30	8.22	15.0	60	60	1 590	Flange/ coupling	MS2N04	61.0
			25 x 10	0.63	8.22							
			20 x 20	1.27	8.22							
	Y	CKK-145-NN-1	20 x 5	0.30	8.22	15.0	60	135	1 590	Flange/ coupling	MS2N04	
			25 x 10	0.63	8.22							
			20 x 20	1.27	8.22							
2VB - 33	Z	CKK-145-NN-1	20 x 5	0.30	8.22	15.0	60	60	1 590	Flange/ coupling	MS2N04	61.0
			25 x 10	0.63	8.22							
			20 x 20	1.27	8.22							
	Y	CKR-145-NN-1	i = 3	5.0	10.8	15.0	60	115	3 000	Gearing	MS2N05	
			i = 5	5.0	6.5							
			i = 10	5.0	3.3							
2VB - 40	Z	CKK-145-NN-1	20 x 5	0.30	11.01	15.0	60	60	1 590	Flange/ coupling	MS2N04	61.0
			25 x 10	0.63	22.02							
			20 x 20	1.27	29.60							
	Y	CKK-200-NN-1	32 x 5	0.25	19.01	15.0	80	80	1 825	Flange/ coupling	MS2N06	
			32 x 10	0.50	19.21							
			32 x 20	1.00	19.21							
			32 x 32	1.60	19.21							
2VB - 41	Z	CKK-145-NN-1	20 x 5	0.30	11.01	15.0	60	60	1 590	Flange/ coupling	MS2N04	61.0
			25 x 10	0.63	22.02							
			20 x 20	1.27	29.60							
	Y	CKR-200-NN-1	i = 3	5.0	38.7	15.0	80	80	3 000	Gearing	MS2N07	
			i = 5	5.0	23.2							
			i = 10	2.5	11.6							

Dimension drawings

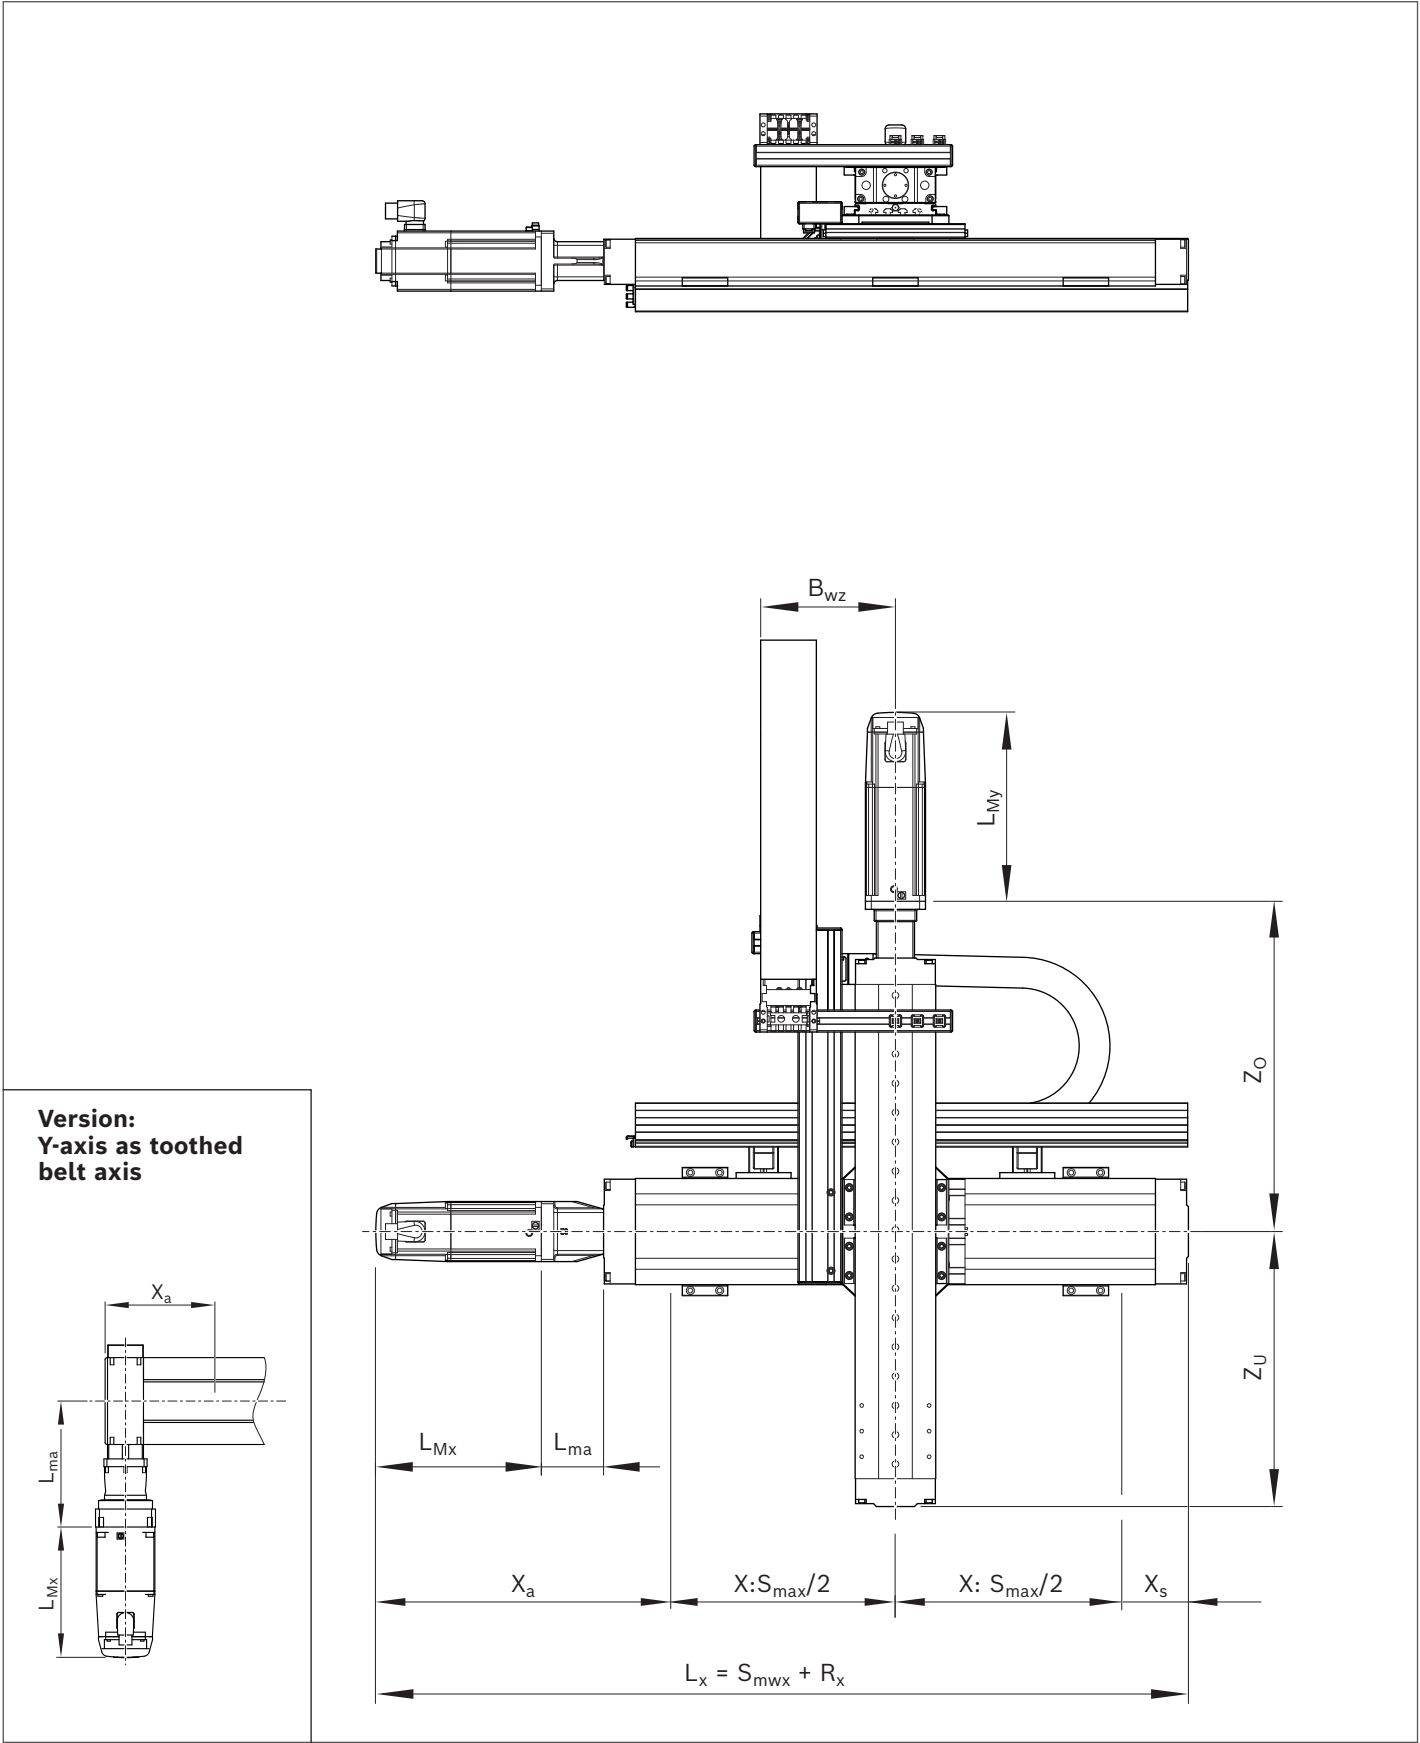

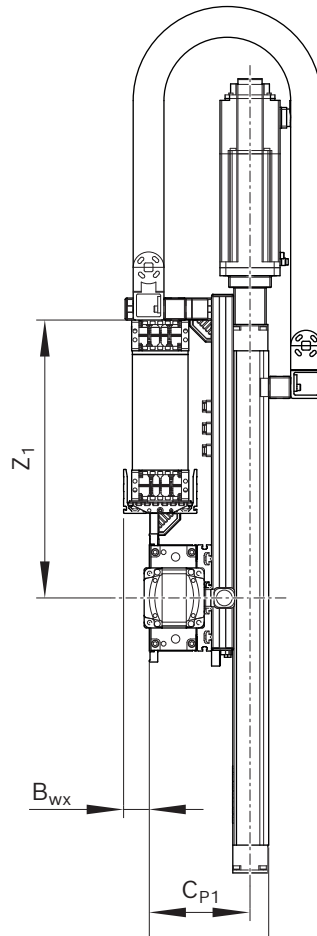

Type	Dimensions (mm)												
	Rx	Xa	Xs	Bwx	Bwz	CP1	CP2	Zu	Zo	Z1	Lma	LMx (max)	LMz (max)
2VB-10	449.0	340.5	108.5	36.5	152	96.5	112.5	80.5	123.5	349.0	70.0	163.5	192.0
2VB-11	289.5	150.0	140.0	36.5	152	96.5	112.5	80.5	123.5	349.0	141.0	203.5	192.0
2VB-20	521.0	395.0	125.5	35.0	169	113.0	134.0	108.5	177.0	359.0	77.5	194.0	192.0
2VB-21	366.5	186.0	180.5	35.0	169	113.0	134.0	108.5	177.0	359.0	160.5	194.0	192.0
2VB-22	521.0	395.0	125.5	35.0	184	118.5	144.0	125.5	201.0	360.0	77.5	194.0	258.5
2VB-23	366.5	186.0	180.5	35.0	184	118.5	144.0	125.5	201.0	360.0	160.5	194.0	258.5
2VB-30	577.5	427.5	150.0	35.0	184	137.5	163.0	125.5	201.0	379.5	85.0	194.0	258.5
2VB-31	400.5	196.5	204.0	35.0	184	137.5	163.0	125.5	201.0	379.5	210.0	188.0	258.5
2VB-32	577.5	427.5	150.0	35.0	213	148.0	182.0	150.0	233.5	379.5	85.0	194.0	258.5
2VB-33	400.5	196.5	204.0	35.0	213	148.0	182.0	150.0	233.5	379.5	210.0	188.0	258.5
2VB-40	831.0	583.0	247.0	8.0	213	192.0	226.0	150.0	233.5	389.0	125.0	224.0	258.5
2VB-41	768.0	319.0	330.0	8.0	213	192.0	226.0	150.0	233.5	389.0	329.0	176.0	258.5

Type 1HB

Product description





- ▶ 1D gantries are units of mechanically coupled linear modules with toothed belt drive for one-dimensional motion tasks.
- ▶ 4 sizes

Technical data

Type	Axis	Linear axis	BASA: $d_o \times P$ Toothed belt: Gear ratio i	v_{max} (m/s)	$M_{P\ max}$ (Nm)	a_{max} (m/s ²)	s_{min} (mm)	s_{min_EC} (mm)	s_{max} (mm)	LM_{min} (mm)	LM_{max} (mm)	Motor attachment	Motor	$m_{ex\ max}$ (kg)
1HB - 20	X	MKR-065-NN-3	$i = 3$	5.00	4.00	15.0	60	125	3 000	253	3105	Gearing	MS2N04	62
			$i = 5$	4.50	2.40									
			$i = 10$	2.30	1.20									
1HB - 30	X	MKR-080-NN-3	$i = 3$	5.00	4.00	15.0	60	85	3 000	315	4144	Gearing	MS2N06	118
			$i = 5$	4.50	2.40									
			$i = 10$	2.30	1.20									
1HB - 40	X	MKR-110-NN-3	$i = 3$	5.00	33.30	15.0	60	60	3 000	355	4155	Gearing	MS2N07	214
			$i = 5$	4.00	20.00									
			$i = 10$	2.00	10.00									
1HB - 50	X	MKR-140-NN-3	$i = 5$	5.00	60.00	15.0	80	80	3 000	475	4195	Gearing	MS2N07	366
			$i = 12$	3.20	25.00									
			$i = 16$	2.40	18.75									

Dimension drawings

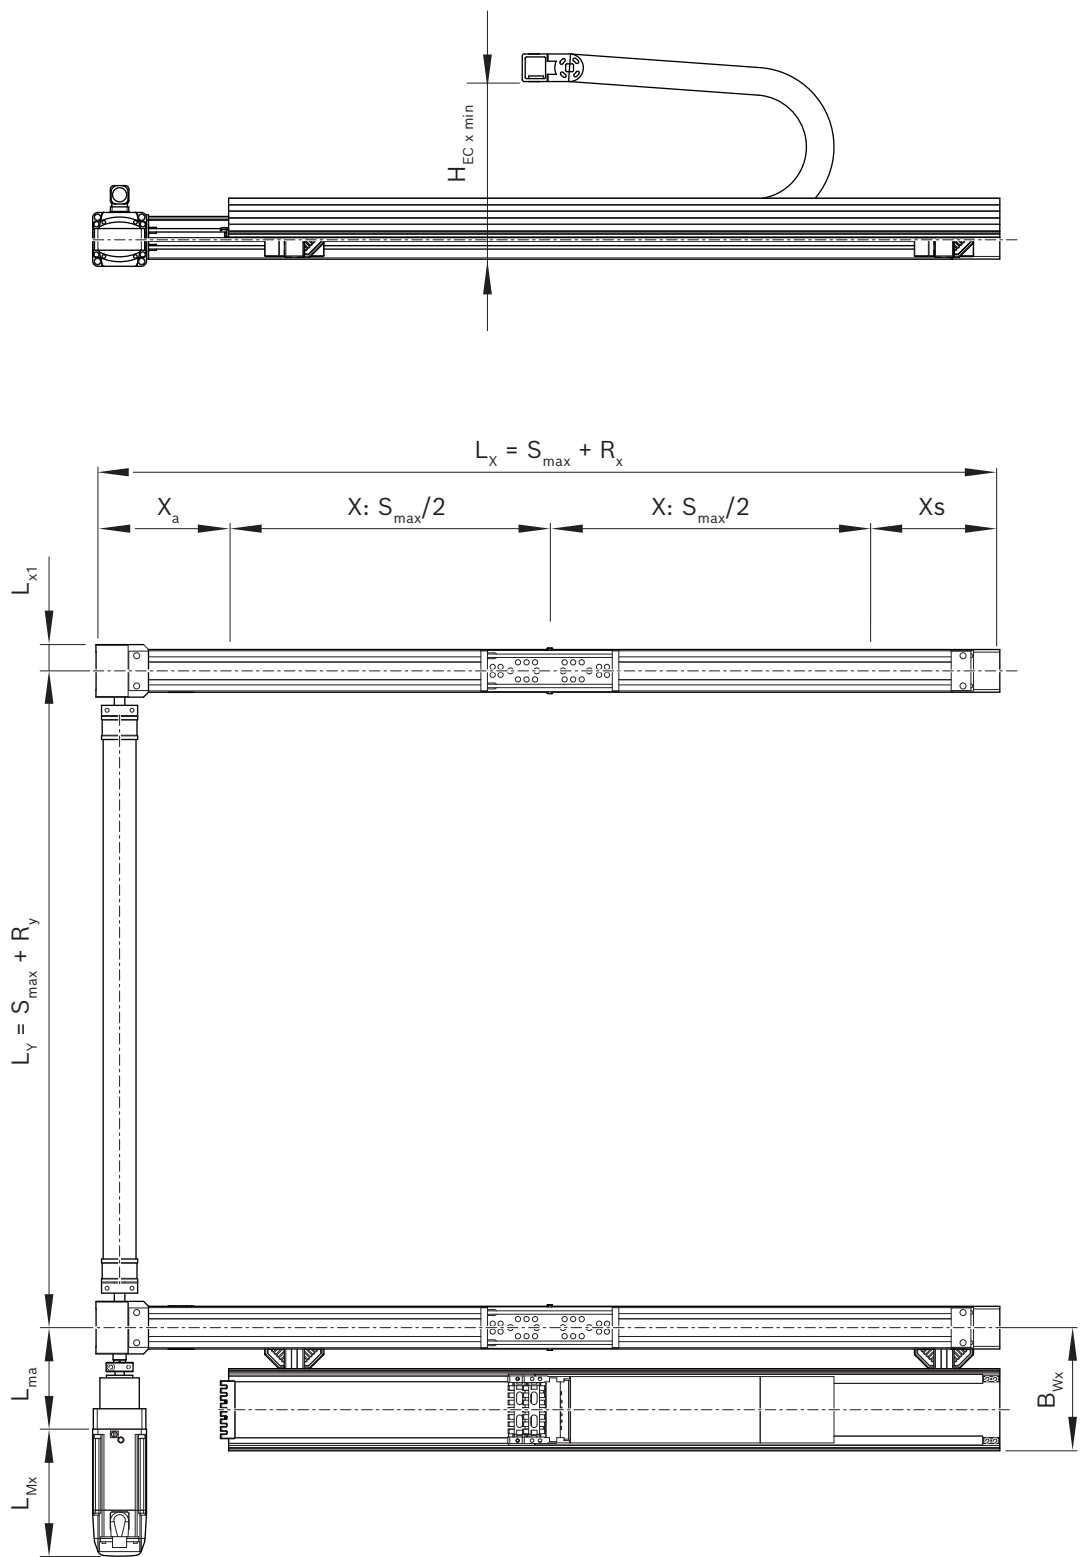

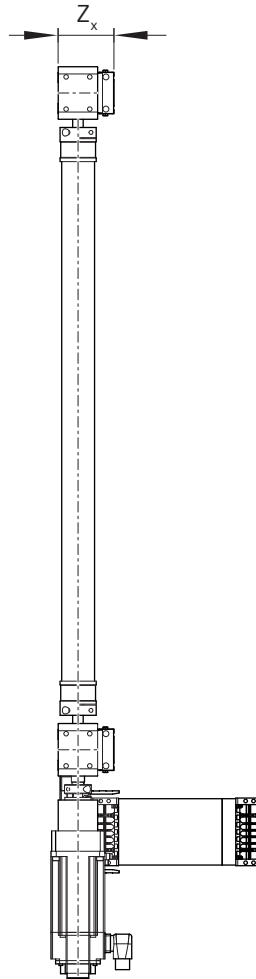

Type	Dimensions (mm)								
	R_x	X_a	X_s	B_{wx}	$H_{EC \times \min}$	L_{x1}	L_{ma}	L_{Mx}	Z_x
1HB-20	376	191.0	185.0	187.5	270	40	154.5	258.5	85
1HB-30	481	240.5	240.5	195.0	270	50	207.5	261.0	100
1HB-40	578	283.0	295.0	210.0	270	59	264.0	317.0	129
1HB-50	715	370.5	344.5	225.0	270	84	324.5	176.0	170

Overview

Fastening options on the relevant axes depend on the type and size of the multi-axis system.

Example: 2D area gantry, type 2HB, size 30

According to the table, information on mounting the x-axis (basic axis) can be found in section "Fig. B2" for the required size MKR-080.

3D cantilever chamber 	TYPE	Size	Z-axis				X-axis (basic axis)	
			Z-adapter Adapter A	HK Adapter B	Without adapter	Size	Fig.	Size
3SA		10	Z1	Z2	Z0	CKK-070	B1	CKX-110
		11	Z1	Z2	Z0	CKK-070	B1	CKX-110
		20	Z1	Z2	Z0	CKK-090	B1	CKX-145
		21	Z1	Z2	Z0	CKK-090	B1	CKX-145
		22	Z1	Z2	Z0	CKK-110	B1	CKX-145
		23	Z1	Z2	Z0	CKK-110	B1	CKX-145
		30	Z1	Z2	Z0	CKK-110	B1	CKX-200
		31	Z1	Z2	Z0	CKK-110	B1	CKX-200

3D gantry 	TYPE	Size	Z-axis				X-axis (basic axis)	
			Z-adapter 1 Fig.	Z-adapter 2 Fig.	HK Fig.	Size	Fig.	Size
3SB		20	Z1	Z2	Z0	CKK-090	B2	MKR-065
		21	Z1	Z2	Z0	CKK-090	B2	MKR-065
		22	Z1	Z2	Z0	CKK-110	B2	MKR-065
		23	Z1	Z2	Z0	CKK-110	B2	MKR-065
		30	Z1	Z2	Z0	CKK-110	B2	MKR-080
		31	Z1	Z2	Z0	CKK-110	B2	MKR-080
		40	Z1	Z2	Z0	CKK-145	B2	MKR-110
		41	Z1	Z2	Z0	CKK-145	B2	MKR-110
		50	Z1	Z2	Z0	CKK-200	B2	MKR-140
		61	Z1	Z2	Z0	CKK-200	B2	MKR-140

3D gantry, performance-optimized 	TYPE	Size	Z-axis				X-axis (basic axis)	
			Z-adapter 1 Fig.	Z-adapter 2 Fig.	HK Fig.	Size	Fig.	Size
3SC		22	Z1	Z2	Z0	CKK-110	B2	MKR-080
		23	Z1	Z2	Z0	CKK-110	B2	MKR-080
		30	Z1	Z2	Z0	CKK-110	B2	MKR-110
		31	Z1	Z2	Z0	CKK-110	B2	MKR-110
		40	Z1	Z2	Z0	CKK-145	B2	MKR-110
		41	Z1	Z2	Z0	CKK-145	B2	MKR-110

2D cantilever surface 	TYPE	Size	Y-axis			X-axis (basic axis)	
			Fig.		Size	Fig.	Size
2HA		8	H6		CKK-070	B1	CKX-090
		9	H6		CKK-070	B1	CKX-090
		10	H5		CKK-090	B1	CKX-110
		11	H5		CKK-090	B1	CKX-110
		20	H1		CKK-110	B1	CKX-110
		21	H1		CKK-110	B1	CKX-110
		22	H1		CKK-110	B1	CKX-145
		23	H1		CKK-110	B1	CKX-145
		30	H2		CKK-145	B1	CKX-145
		31	H2		CKK-145	B1	CKX-145
		32	H2		CKK-145	B1	CKX-200
		33	H2		CKK-145	B1	CKX-200

2D area gantry	TYPE	Size	Y-axis		X-axis (basic axis)	
			Fig.	Size	Fig.	Size
	2HB	20	H1	CKX-110	B2	MKR-065
		21	H1	CKX-110	B2	MKR-065
		30	H2	CKX-145	B2	MKR-080
		31	H2	CKX-145	B2	MKR-080
		40	H3	CKX-200	B2	MKR-110
		41	H3	CKX-200	B2	MKR-110
		50	H3	CKX-200	B2	MKR-140
		61	H4	MKR-145	B2	MKR-140

2D linear gantry	TYPE	Size	Z-axis				Y-axis (basic axis)	
			Z-adapter 1 Fig.	Z-adapter 2 Fig.	HK Fig.	Size	Fig.	Size
	2VA	20	Z1	Z2	Z0	CKK-090	B1	CKX-110
		21	Z1	Z2	Z0	CKK-090	B1	CKX-110
		22	Z1	Z2	Z0	CKK-110	B1	CKX-110
		23	Z1	Z2	Z0	CKK-110	B1	CKX-110
		30	Z1	Z2	Z0	CKK-110	B1	CKX-145
		31	Z1	Z2	Z0	CKK-110	B1	CKX-145
		32	Z1	Z2	Z0	CKK-145	B1	CKX-145
		33	Z1	Z2	Z0	CKK-145	B1	CKX-145

2D linear gantry, wall mounting	TYPE	Size	Z-axis				Y-axis (basic axis)	
			Z-adapter 1 Fig.	Z-adapter 2 Fig.	HK Fig.	Size	Fig.	Size
	2VB	10	Z1	Z2	Z0	CKK-070	B1	CKX-090
		11	Z1	Z2	Z0	CKK-070	B1	CKX-090
		20	Z1	Z2	Z0	CKK-090	B1	CKX-110
		21	Z1	Z2	Z0	CKK-090	B1	CKX-110
		22	Z1	Z2	Z0	CKK-110	B1	CKX-110
		23	Z1	Z2	Z0	CKK-110	B1	CKX-110
		30	Z1	Z2	Z0	CKK-110	B1	CKX-145
		31	Z1	Z2	Z0	CKK-110	B1	CKX-145
		32	Z1	Z2	Z0	CKK-145	B1	CKX-145
		33	Z1	Z2	Z0	CKK-145	B1	CKX-145
		40	Z1	Z2	Z0	CKK-145	B1	CKX-200
		41	Z1	Z2	Z0	CKK-145	B1	CKX-200

1D gantry	TYPE	Size	X-axis (basic axis)	
			Fig.	Size
	1HB	20	B2	MKR-065
		30	B2	MKR-080
		40	B2	MKR-110
		50	B2	MKR-140




CKX = compact modules with ball screw assembly CKK or toothed belt drive CKR
MKR = linear modules with toothed belt drive

Fastening with clamping fixtures

Position and number of the clamping fixtures can be taken from the configured 3D CAD model

Fig. B1

⚠ Do not secure or support the compact module at the end enclosures or cross ties! The frame is the load-bearing part!

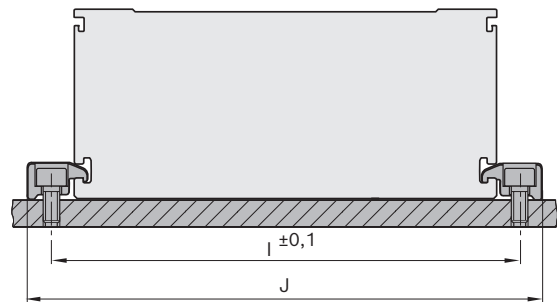




Countersink for thread M
ISO 4762, number N

Size	for thread M	N	Dimensions (mm)										Material number
			A	B	C	D	E	F	G	H	I	J	
CKX-090	M4	2	62	11.0	40	9.0	4.6	14.5	10.5	5.0	102	112	R037531033
CKX-110	M6	2	62	11.0	40	11.5	5.3	19.3	14.0	7.0	126	140	R037551034
CKX-145	M6	2	62	11.0	40	11.5	5.3	19.3	14.0	7.0	161	175	R037551034
CKX-200	M8	2	78	19.0	40	27.5	14.8	29	19.0	9.0	222	240	R117529097

Fig. B2

⚠ Do not secure or support the linear module at the end enclosures! The frame is the load-bearing part!



Countersink for thread M
ISO 4762, number N

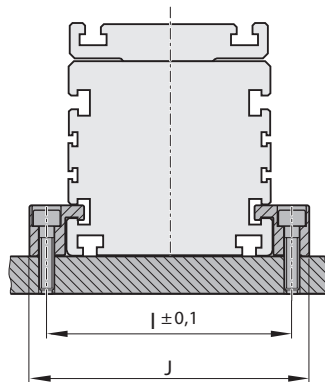

Size	Countersink ISO 4762 for	N	Dimensions (mm)									Material number
			A	B	C	D	E	F	H	I	J	
MKR-065	M6	2	78	14.0	50	20.0	11.5	20	7.0	81.0	95.0	R117519024
MKR-080	M6		78	14.0	50	20.0	11.5	20	7.0	96.0	110.0	R117519024
MKR-110	M8		108	19.0	70	27.5	16.5	29	9.0	132.0	150.0	R117529026
MKR-140	M10		163	29.0	105	40.5	27.0	41	13.0	170.0	196.0	R117539014



Z adaptation

Fig. Z0
without adapt

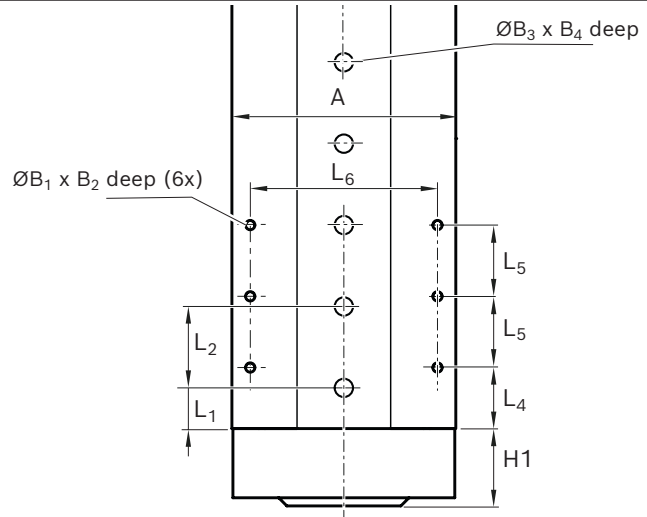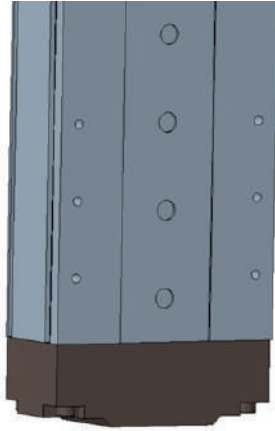


Size	Dimensions (mm)											
	A	B ₁	B ₂	ØB ₃ ^{H7}	B ₄	H1	L ₁	L ₂ ±0.01	L ₃ (min)	L ₄	L ₅	L ₆
CKK-070	70	M3	6.0	7	1.6	29.0	20	40	10	15	25	59
CKK-090	90	M4	7.5	9	2.1	32.0	20	40	10	30	35	76
CKK-110	110	M5	9.0	9	2.1	38.0	20	40	10	30	35	92
CKK-145	145	M6	13.0	12	2.1	45.0	20	40	10	30	35	124
CKK-200	200	M8	12.0	16	3.1	59.5	20	40	10	35	40	119

Fig. Z1
Adapter A

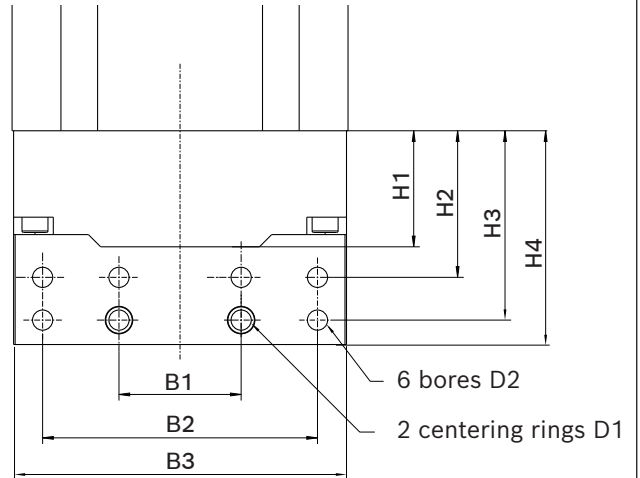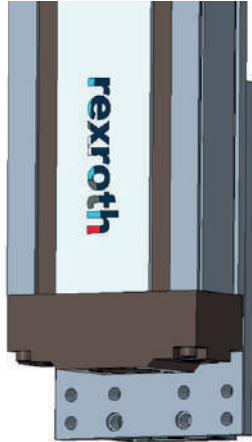

Size	Dimensions (mm)									Material number
	B1	B2	B3	H1	H2	H3	H4	Ø D1	Ø D2	
CKK-070	20	40	68	20.0	29	39	45	7H7	4.5	R039120371
CKK-090	40	76	89	32.0	42	54	61	9H7	5.5	R039120372
CKK-110	40	90	109	38.0	48	62	70	9H7	6.6	R039120373
CKK-145	60	125	144	43.5	58	78	90	12H7	9.0	R039120374
CKK-200	60	125	144	59.5	76	100	114	16H7	11.0	R039120375

Fig. Z2
Adapter B

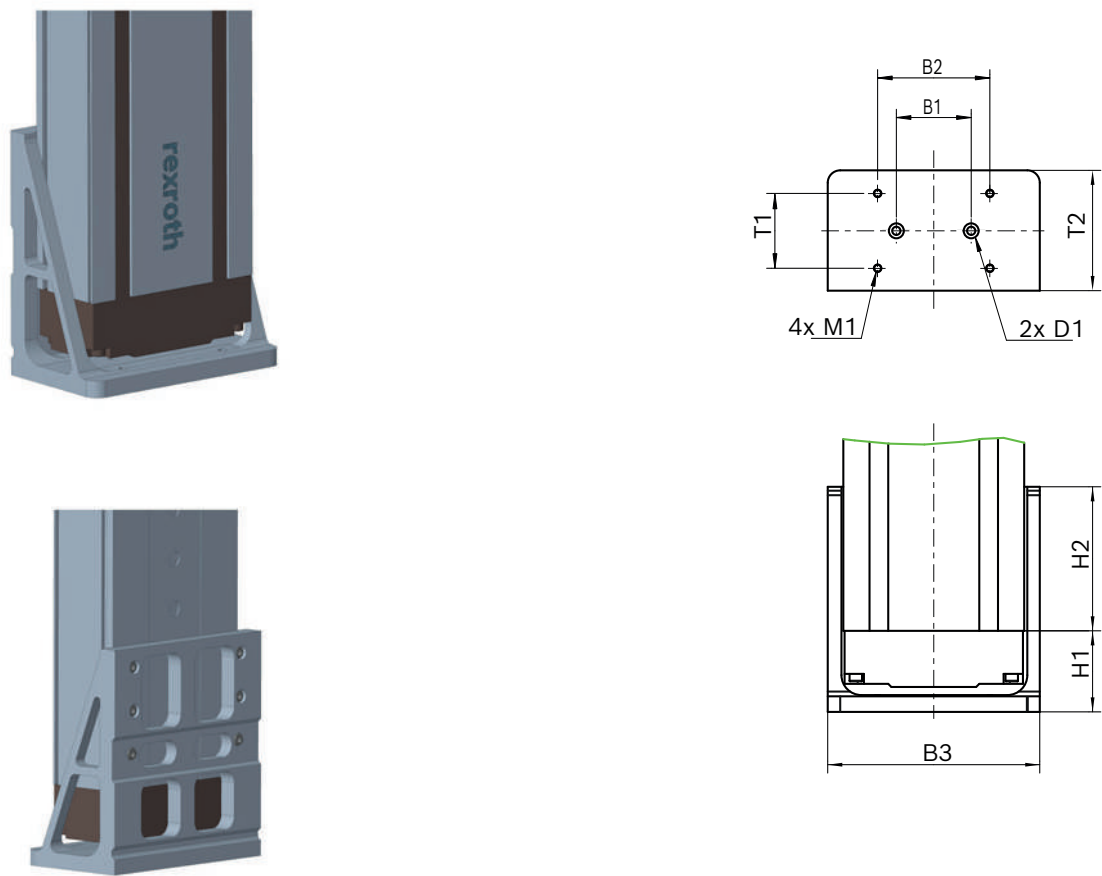

Size	Dimensions (mm)									Material number
	B1	B2	B3	H1	H2	T1	T2	D1 ^{H7}	M1	
CKK-070	40	60	85	43.0	69.5	20	52.0	7	M4	R039120423
CKK-090	40	60	110	49.5	106.5	40	67.5	9	M4	R039120424
CKK-110	40	60	130	53.0	107.0	40	67.5	9	M5	R039120425
CKK-145	60	90	170	65.0	115.5	60	96.5	12	M6	R039120426
CKK-200	60	120	235	89.5	129.5	90	138.5	16	M8	R039120427

Connection plates

Fig. H1

Size CKX-110

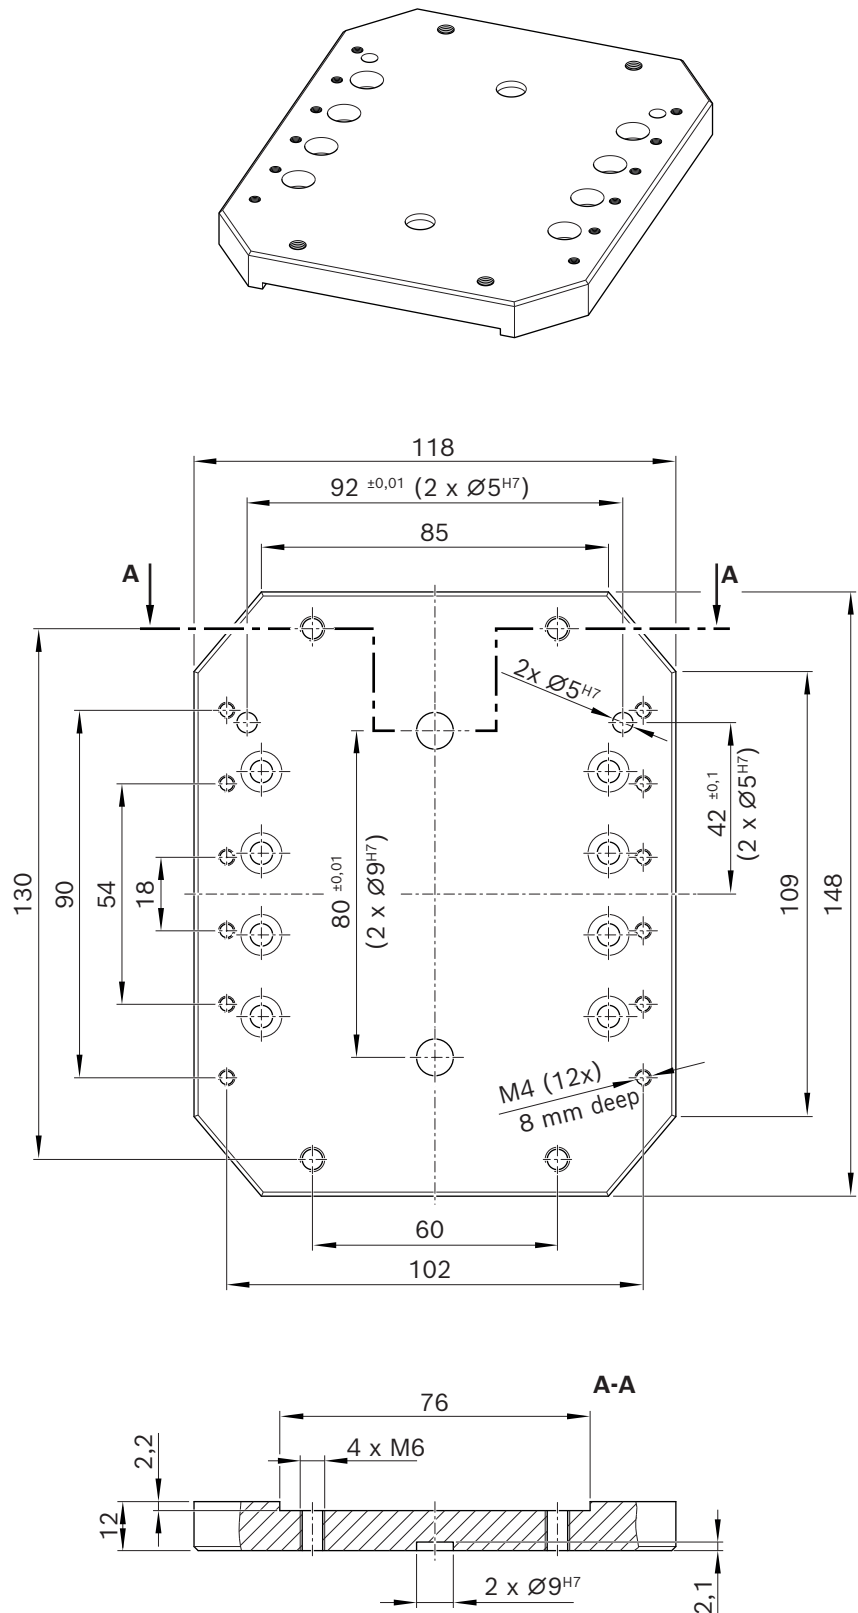
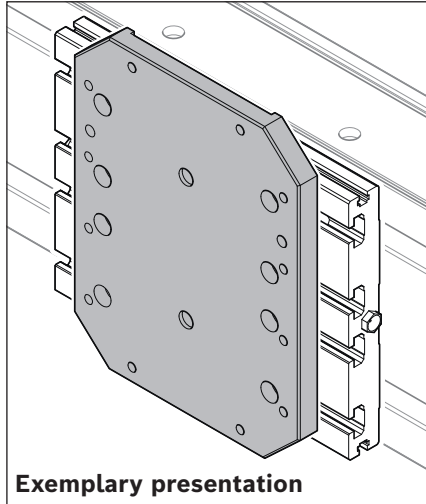


Fig. H2

Size CKX-145

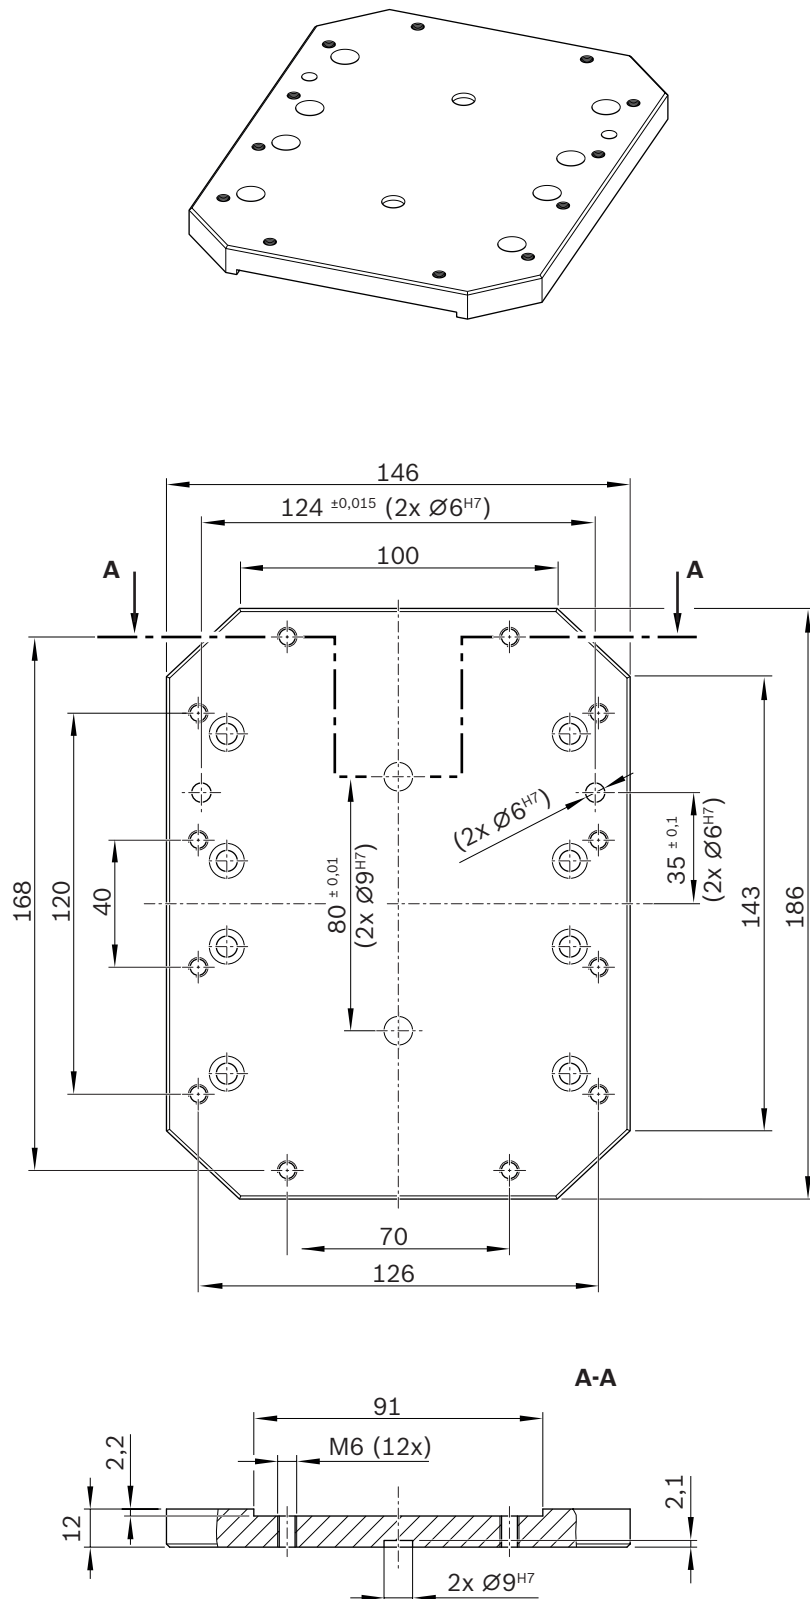
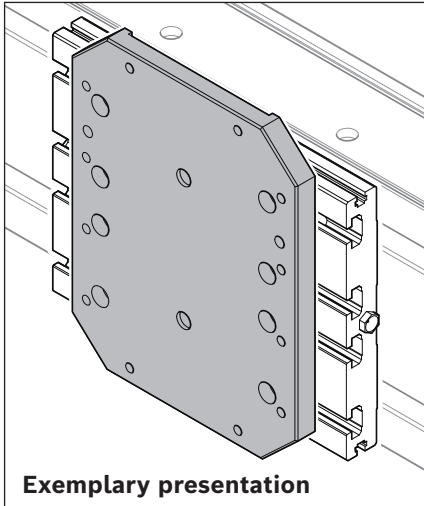


Fig. H3

Size CKX-200

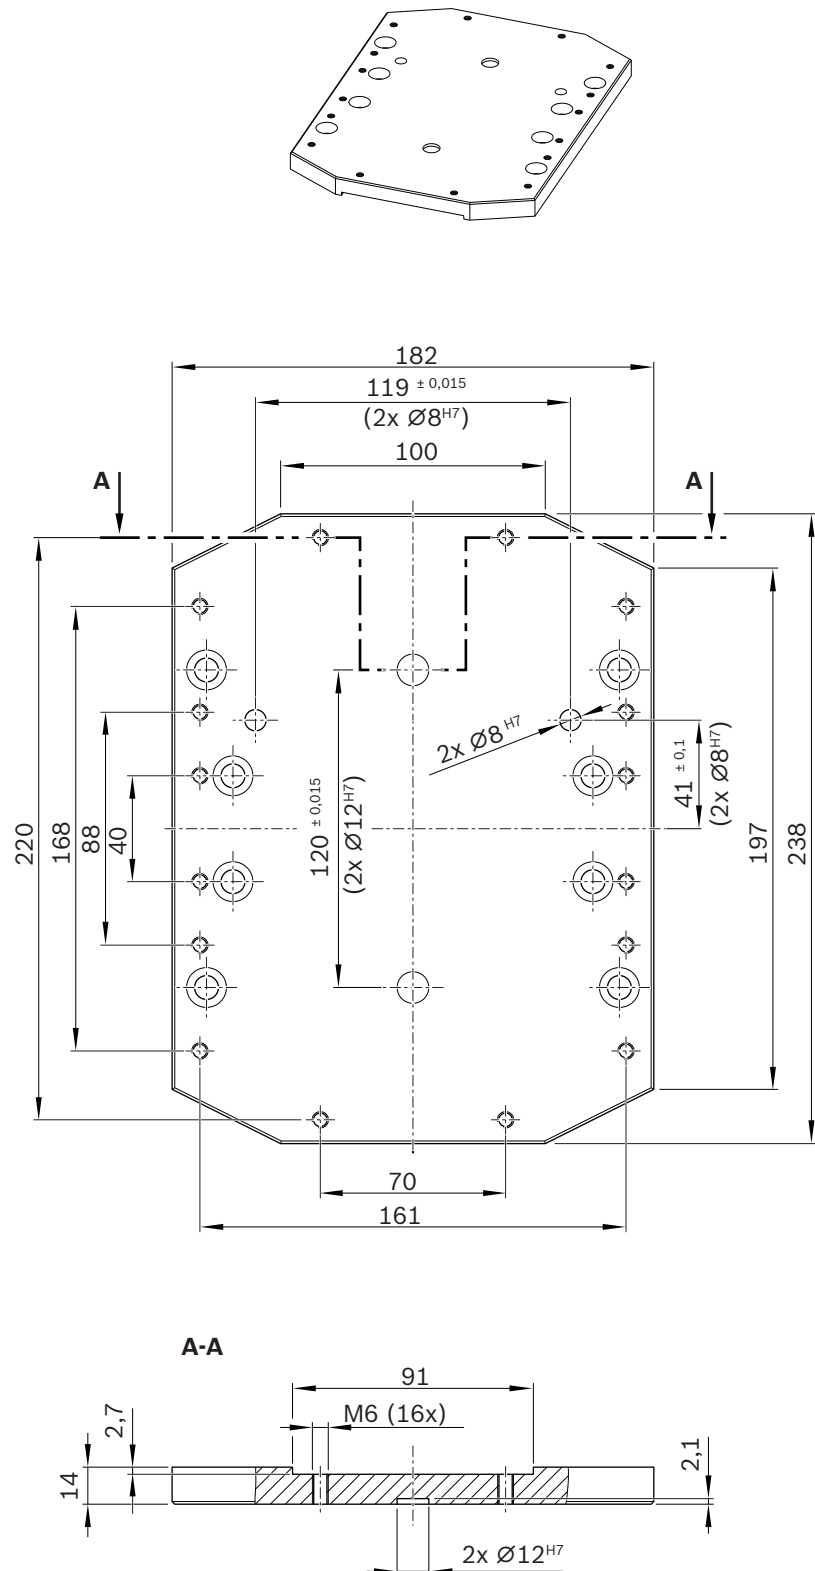
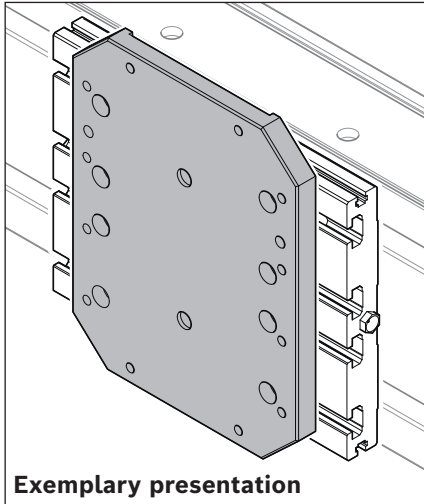


Fig. H4

Size MKR-145

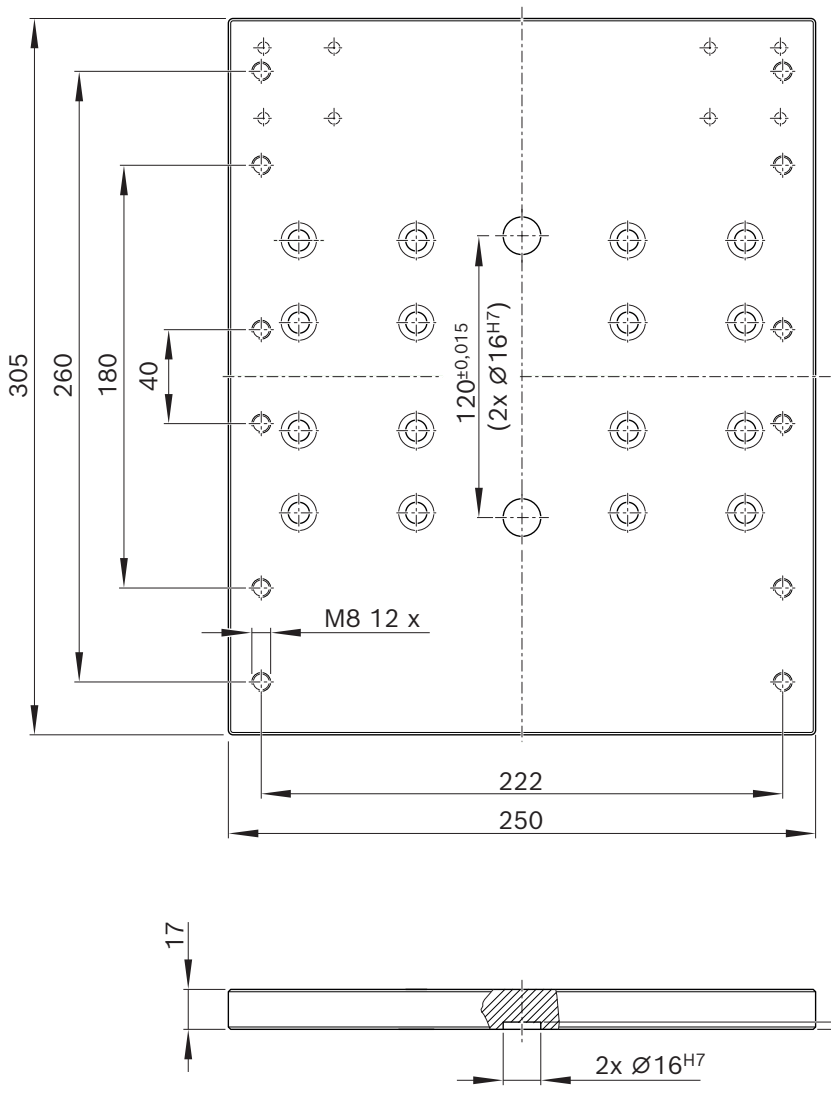
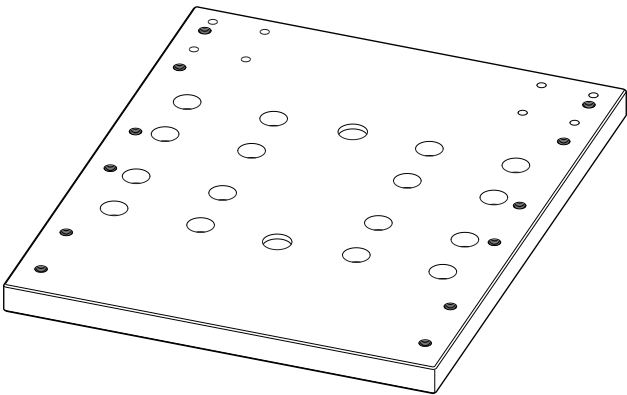


Fig. H5

Size CKX-090


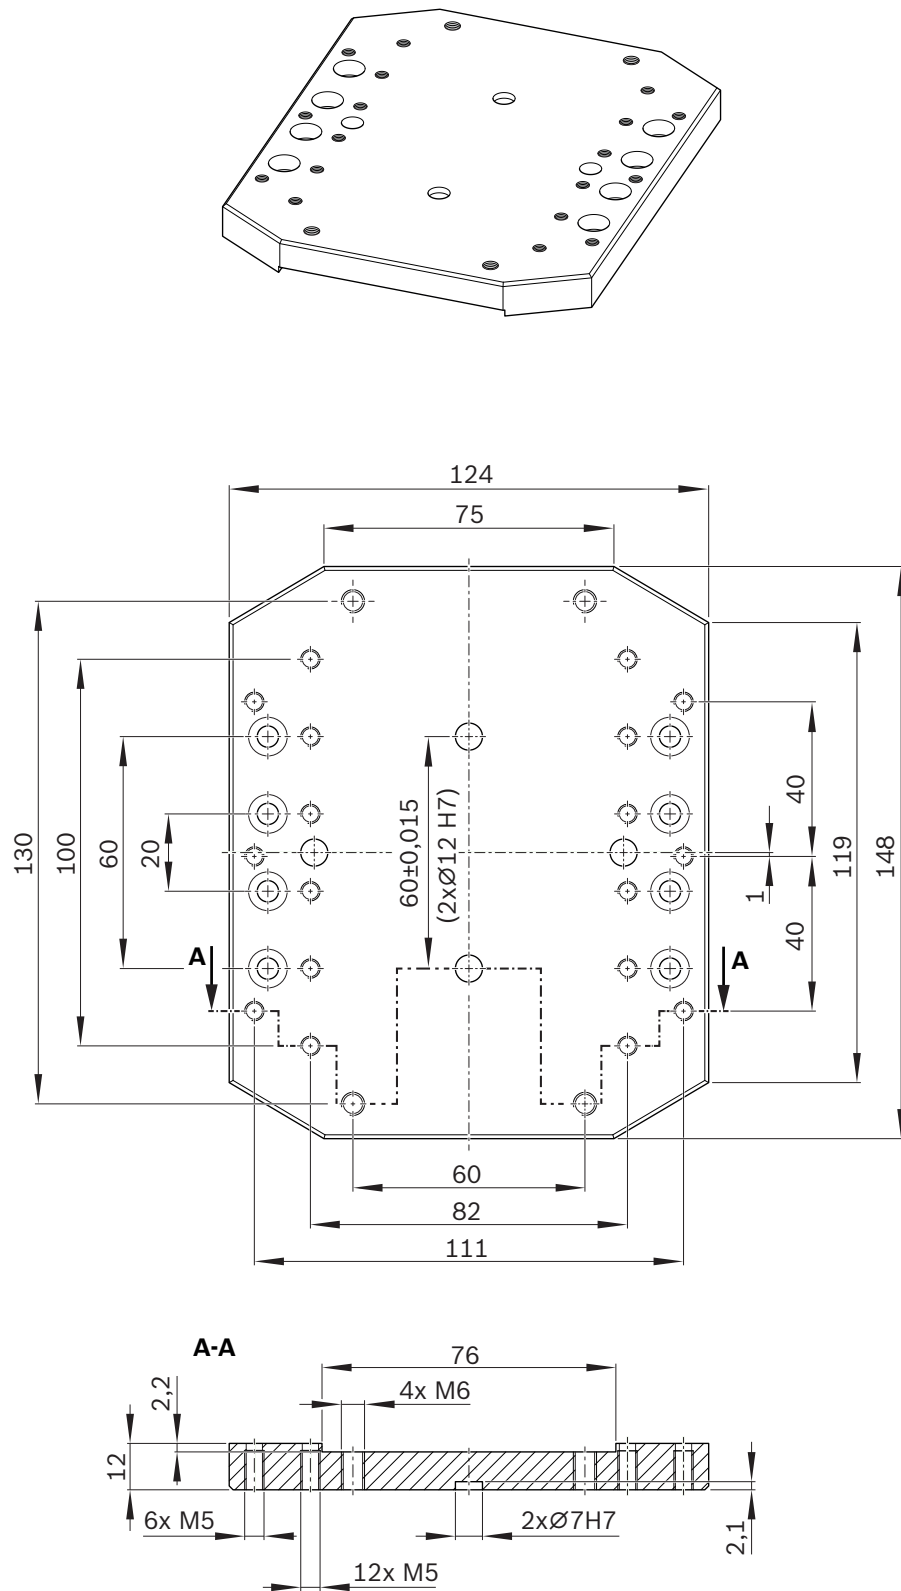


Fig. H6

Size CKK-070

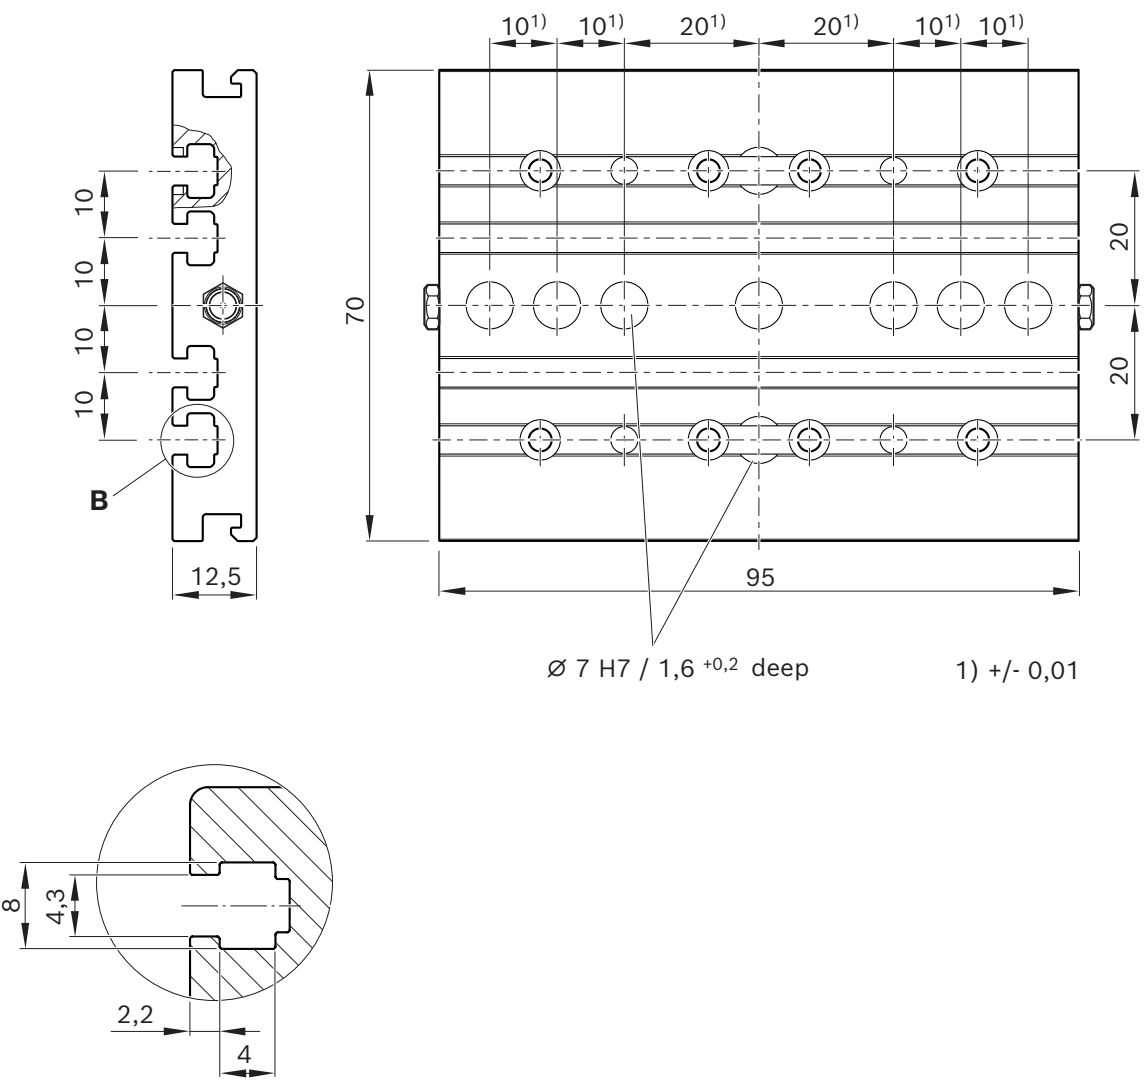


Cable drag chains

Features

- ▶ ESD-capable
- ▶ Smooth running
- ▶ High stability
- ▶ Flexible interior layout
- ▶ Chain connector with integrated strain relief

Bending radius

- ▶ Minimum bending radius 100 mm
- ▶ Customer cables or hoses: Observe the manufacturer's specifications

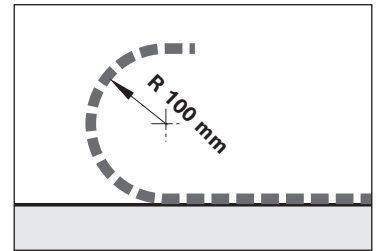


Cable drag chains can be selected as an option

Cable drag chains with cable (for single-cable connection)

The scope of delivery includes cable drag chains, storage trays as well as all fastening material and is completely mounted on the multi-axis system.


With cables connected (plug connection), which are routed in the cable drag chains to the output of the storage tray of the basic axis. The cable ends and the motor of the basic axis are designed with a plug connection thus offering the option of connecting cables to the controller.

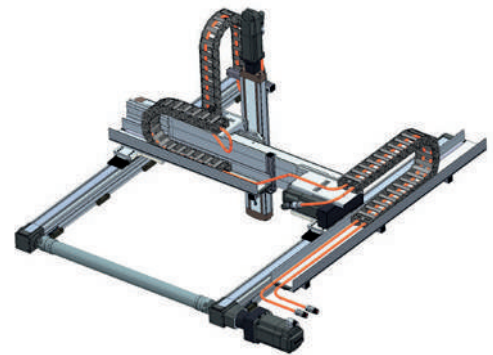

Cable drag chain without cable:


The scope of delivery includes cable drag chains, storage trays as well as all fastening material and is completely mounted on the multi-axis system.

All motors without motor cable.

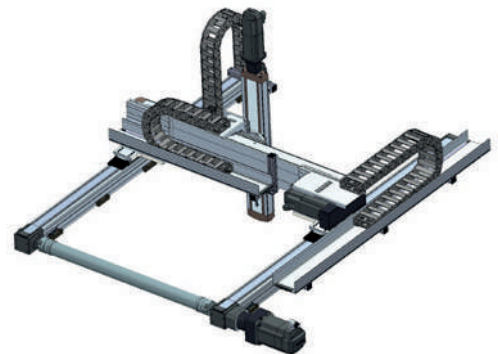


Without cable drag chain, without cable:

The multi-axis system does not have cable drag chain and cable

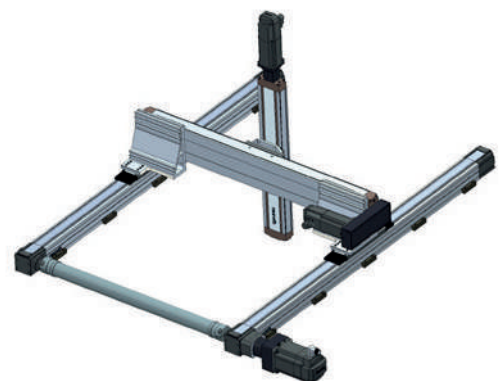


Illustrations are exemplary

EFK-085

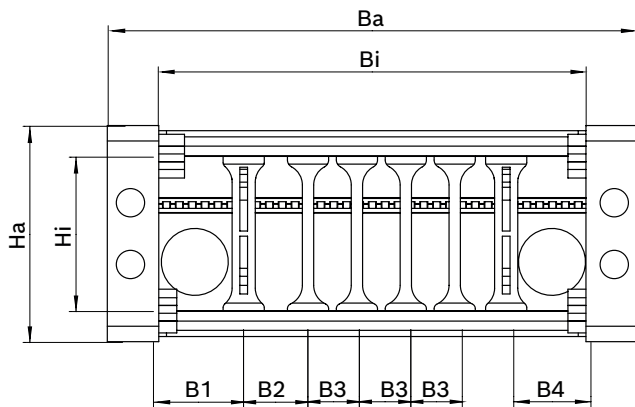


EFK-060

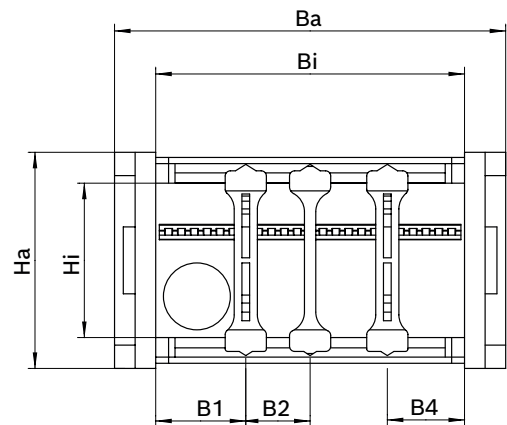

EFK	Dimensions (mm)							
	Ba	Bi	Ha	Hi	B1	B2	B3	B4
EFK-085	103	85	42	30	17.5	12.5	10	15
EFK-060	78	58	42	30	17.5	12.5	—	15

Combination of axes (independent of size)	Allocation of cable drag chain		
	X-axis	Y-axis	Z-axis
3SA	EFK-085	EFK-060	EFK-060
3SB	EFK-085	EFK-060	EFK-060
3SC	EFK-085	EFK-060	EFK-060
2HA	EFK-085	EFK-060	—
2HB	EFK-085	EFK-060	—
2VA	—	EFK-060	EFK-060
2VB	—	EFK-060	EFK-060
1HB	EFK-085	—	—

Perfect fit: Choose the best way to your product

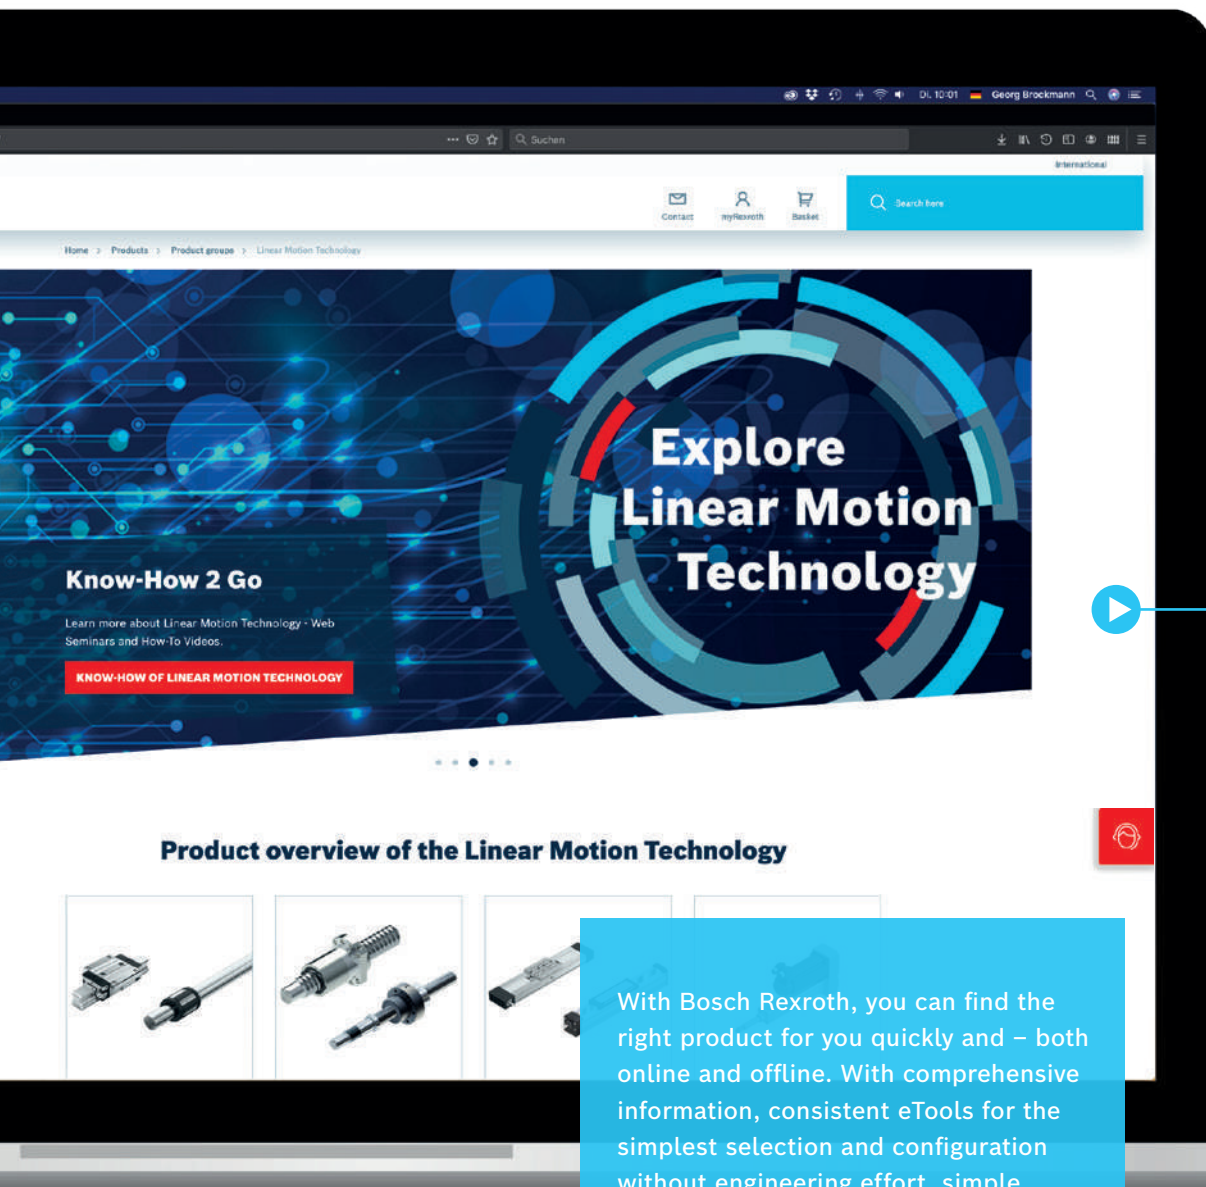

ONLINE

All product selection guides are immediately available via the Bosch Rexroth website

Product overview of the Linear Motion Technology

With Bosch Rexroth, you can find the right product for you quickly and – both online and offline. With comprehensive information, consistent eTools for the simplest selection and configuration without engineering effort, simple ordering and personal support at any time. The perfect basis for building best-in-class multi-axis systems. Fast and economical.





Operating conditions

Normal operating conditions

Ambient temperature with Bosch Rexroth servo motor	0 °C ... 40 °C, loss of performance above 40 °C
Ambient temperature for mechanical system (no dropping below dew point)	−10 °C ... 50 °C
Soiling	Not permissible

Required and supplementary documentation

For further instructions and information, please refer to the documentation for this product.

You can find PDF files of these documents on the Internet at www.boschrexroth.com/mediadirectory.

We would also be happy to send you the documents that you want.

If you are unsure about using this product, please contact Bosch Rexroth.

Links

Home page Bosch Rexroth linear motion technology	www.boschrexroth.com/linear-motion-technology	
Multi-axis systems	www.boschrexroth.com/multi-axis-systems	
Smart Function Kit Handling (SFK-H)	www.boschrexroth.com/sfk-handling	
Smart Function Kit Dispensing (SFK-D)	www.boschrexroth.com/sfk-dispensing	
Configurators and tools	https://www.boschrexroth.com/de/de/produkte/konfiguratoren-und-tools/	
Media directory (Downloads)	https://www.boschrexroth.com/mediadirectory	

Service

Linear motion technology servicing: Maximum machine availability and productivity



Rexroth servicing for linear motion technology means partnership over the entire life cycle of your systems. We are there to help you in 80 countries around the world. From emergency repairs to field service, with original spare parts, modernization and predictive maintenance services. And beyond that with an extensive training portfolio. Working together, we increase your productivity and ensure maximum availability.



REPAIR

- ▶ Analysis
- ▶ Expert overhauls
- ▶ Cost control



SPARE PARTS

- ▶ Inexpensive
- ▶ Time-saving
- ▶ Spare parts from the original manufacturer
- ▶ Low storage costs



FIELD SERVICE

- ▶ Repairs on location
- ▶ Reduced downtimes
- ▶ Customer-specific service packages



TRAINING

- ▶ Professional assembly
- ▶ Replacing wear parts
- ▶ Damage analysis
- ▶ Rexroth Academy
- ▶ How-to videos



**LINEAR MOTION TECHNOLOGY
SERVICING GERMANY**

- ▶ 24h hotline +49 9352 405060
- ▶ Service@boschrexroth.de

Success story

WE MOVE. YOU WIN.
SUCCESS STORY

If a standardized multi-axis system cannot optimally meet your requirements, Bosch Rexroth will tailor an individual solution for you. Here's an example:

Electrochemical machining with ready-to-install six-axis handling system


Compact, robust and highly precise

THE CHALLENGE

Today's machines for electrochemical machining (ECM) should have short cycle times and work with micrometer precision even over long travel distances. At the same time, use in corrosive salt spray places huge demands on the material. With the help of Rexroth components, the medium-sized EMAG Group developed a new modular and economical machine concept for use in such environments. It should be particularly compact and cover all process steps – from pre-cleaning and electrochemical machining to post-cleaning and testing.

THE REXROTH SOLUTION

The modular, corrosion-resistant six-axis multi-axis system with an integrated high-precision IMS-I measuring system includes a complete sensor system and evaluation electronics in the runner blocks. The fully pre-assembled system is based on adapted standard modules from Rexroth's linear motion technology toolbox. The positive-locking connection technology allows quick final assembly with no need for time-consuming adjustment. An automated central lubrication system guarantees minimum maintenance and maximum service life.

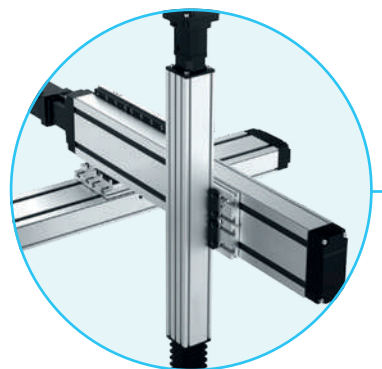THE COMPONENTS


Two three-axis systems




THE RESULT

"Rexroth achieved our goals as regards compactness, costs and flexibility."


Alexander Noller,
EMAG

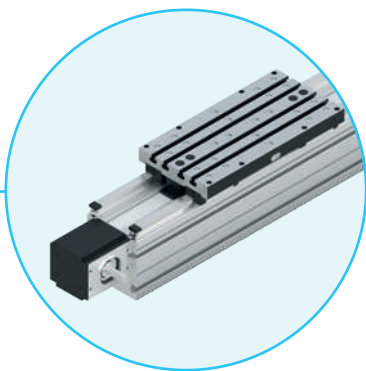

**Linear modules
MKR**

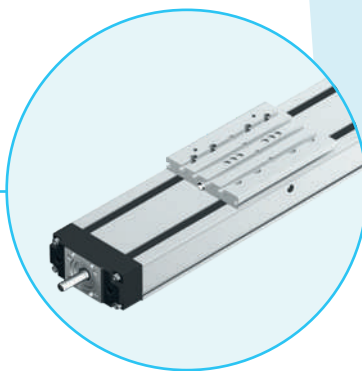

**Compact modules
CKK**

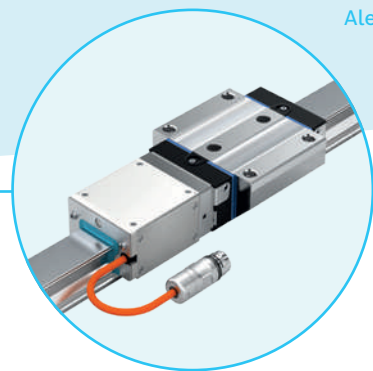

**Integrated measuring system
IMS-I**

Bosch Rexroth AG

Ernst-Sachs-Straße 100
97424 Schweinfurt, Germany
Phone +49 9721 937-0
www.boschrexroth.com

Find your local contact person here:

www.boschrexroth.com/contact

